

OFF-ROAD

| MULTI-TERRAIN

| STREET-PERFORMANCE

| SPECIALTY

# ATTURO

## TIRES



# 2023

855.632.8031  
INFO@ATTURO.COM  
ATTURO.COM

# GO BEYOND WHERE OTHERS STOP

Atturo is a private brand tire company dedicated to bringing excitement to drivers and dealers. We have developed a line of tires that meets the rigorous demands of the independent tire dealer, and the drivers seeking to get the most out of their vehicle. Available in an incredible range of sizes and fitments, Atturo Tires offer innovative engineering, aggressive styling, and premium quality materials at an affordable price. Just like you, we go beyond where others stop, so the only question is, **where will you go today?**

## TABLE OF CONTENTS

TRAIL BLADE SERIES	TRAIL BLADE BOSS	03	TRAIL BLADE SERIES	TRAIL BLADE ATS	11
	TRAIL BLADE MTS	05		TRAIL BLADE A/T	13
	TRAIL BLADE M/T	07		TRAIL BLADE BOSS SXS	15
	TRAIL BLADE X/T	09		TRAIL BLADE X/T SXS	16

PERFORMANCE TIRES AZ SERIES	AZ850	17
	AZ850 DR	19
	AZ610	21

SPECIALTY TIRES	CV400	23
	ST200	25
	TIRE SPECS	27
	TIRE SELECTOR	42

855.632.8031  
INFO@ATTURO.COM  
ATTURO.COM

 @AtturoTires
  @AtturoTires
  @AtturoTires
  Atturo Tires



# TRAIL BLADE BOSS



**LOOKS GREAT  
EVEN WHEN  
THINGS  
GET UGLY**

Take control of the toughest terrain with a mighty off-road tread.



SEE THIS TIRE ON  
ATTURO.COM



**SPLIT CENTER BLOCK FLOWS**  
Allows water and debris to flow through, while maintaining rigidity when mountain climbing.

**OVERSIZED TREAD BLOCK CRUSHES**  
Provides the most robust, terrain-crushing power in the Trail Blade lineup.

**WAVE CHANNEL GRIPS**  
Improves traction and mitigates road thunder (at least a little).



## AVAILABLE SIZES

See page 27 for detailed sizing specifications

35x13.50R15LT	37x12.50R17LT	40x13.50R17LT	37x13.50R18LT	LT325/60R20	LT375/45R20	LT375/55R20
38x14.50R20LT	40x14.50R20LT	LT355/40R22	LT375/45R22	40x14.50R22LT	LT375/40R24	38x13.50R24LT
40x14.50R24LT	42x15.50R24LT	37x12.50R17LT	40x13.50R17LT			

## NEW STICKIES!

● Sticky Compound NO DOT  
(For Off-Road Use Only)



# TRAIL BLADE MTS



## MUD WRESTLER DESIGNED TO DOMINATE


Cut through the slop with a heavy-duty tire that's ideal for ¾ and 1-ton trucks.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)



- SERRATED EDGE CUTS**  
Encourages off-road mayhem.
- SIPE COMBINATION CLEARS**  
Enhances traction in wet conditions, on or off-road.
- QUAD CENTER GRABS**  
Boasts a unique look and doubles the biting edge grip.

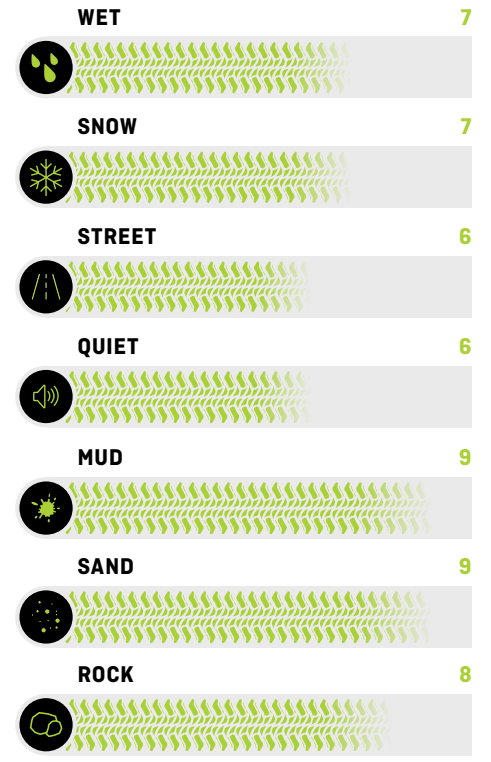

### AVAILABLE SIZES

See page 28 for detailed sizing specifications

37x12.50R17LT	LT325/65R18	33x12.50R18LT	35x12.50R18LT	LT295/55R20	33x13.50R20LT
35x13.50R20LT	285/45R22	LT285/55R22	33x13.50R22LT	35x13.50R22LT	33x13.50R24LT
35x13.50R24LT	37x13.50R24LT	LT385/30R26	35x13.50R26LT	37x13.50R26LT	

# TRAIL BLADE M/T



## MENACING STYLE TREATS MUD LIKE DIRT

An affordable performance tire that's purpose-built for the messiest terrain.




SEE THIS TIRE ON [ATTURO.COM](https://atturo.com)



- AGGRESSIVE TREAD GRIPS**  
Plows through just about anything you might encounter on the trail.
- OPEN SHOULDER DRAINS**  
Helps eject mud, water, rocks, dirt, and more, providing easy cleanout and enhanced grip.
- BEVELED EDGE BITES**  
Provides lateral grip when turning, especially on soft surfaces.

OFF-ROAD TIRES

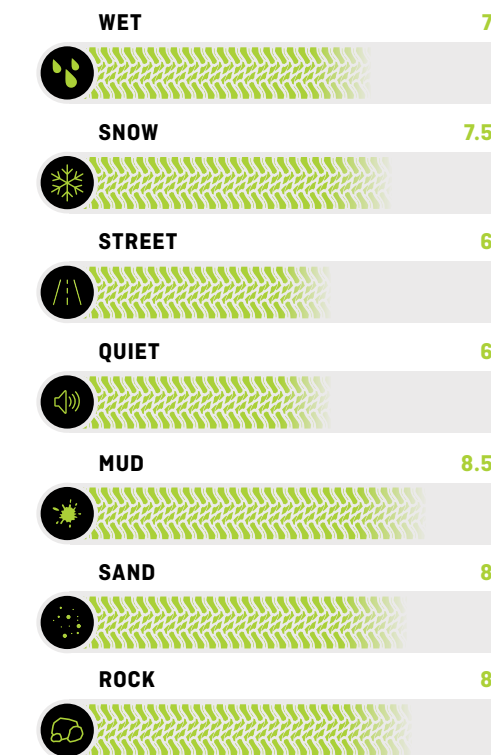

### AVAILABLE SIZES

See page 29 for detailed sizing specifications

LT235/85R16	LT245/75R16	LT265/75R16	LT285/75R16	LT265/70R17	33x12.50R17LT	35x12.50R17LT	LT275/65R18
LT275/70R18	33x12.50R18LT	35x12.50R18LT	37x13.50R18LT	255/55R19	LT285/50R20	33x12.50R20LT	35x12.50R20LT
37x13.50R20LT	33x12.50R22LT	35x12.50R22LT	37x13.50R22LT				

# TRAIL BLADE X/T

**45K**  
MILE WARRANTY  
TRAIL BLADE X/T

## THE ULTIMATE URBAN MULTI-TERRAIN

From mud to dirt to highway, enjoy the best of all possible rides.



SEE THIS TIRE ON  
ATTURO.COM



**LARGE SHOULDER BLOCK GRIPS**


Delivers solid traction in off-road conditions.

**BLOCK SHAPE QUIETS**

Finely sliced blocks reduce noise and allow water to flow out of the contact area.

**CENTER TREAD BLOCK STABILIZES**

Improves stability on the highway by reducing tread squirm.

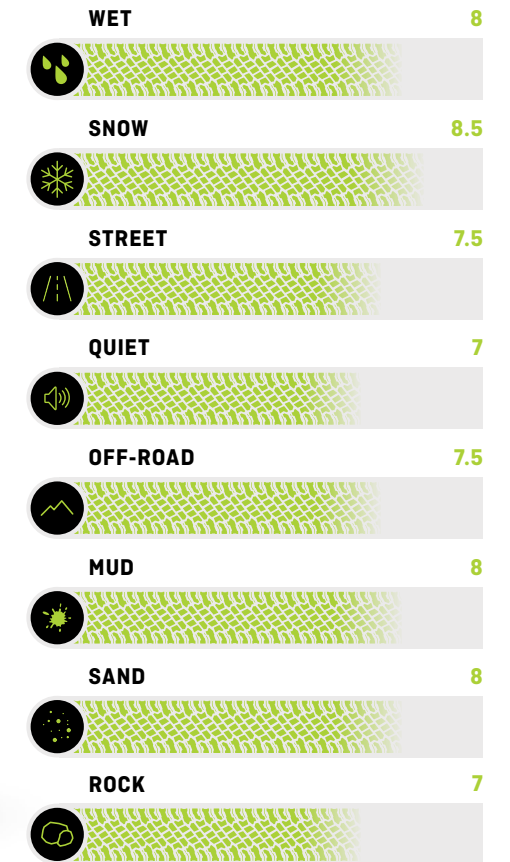

**AVAILABLE SIZES**

See page 30 for detailed sizing specifications

235/65R17	LT255/75R17	LT285/70R17	LT295/70R17	35x12.50R17LT	37x12.50R17LT	235/60R18	LT255/70R18
LT275/70R18	285/60R18	LT285/65R18	LT295/70R18	33x12.50R18LT	35x12.50R18LT	265/50R20	LT265/60R20
275/45R20	275/55R20	LT275/65R20	LT285/55R20	LT295/60R20	LT305/50R20	LT305/55R20	33x12.50R20LT
35x12.50R20LT	275/45R22	305/45R22	LT325/50R22	285/40R24	LT325/45R24	LT345/50R24	305/30R26

# TRAIL BLADE ATS



**50K**  
MILE WARRANTY  
ALL-TERRAIN TIRES

## STRIKING LOOK THAT DOES THE DIRTY WORK

Super sharp and tough, here's a stylishly aggressive tire that's ready for action on or off the asphalt.




SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)



- CENTER RIB STABILIZES**  
Provides enhanced steering response and tire rigidity.
- WIDE CHANNEL FLUSHES**  
Reduces noise and stops debris from taking a free ride.
- SHOULDER BLOCK GRINDS**  
Delivers consistent traction in all types of conditions.

OFF-ROAD TIRES

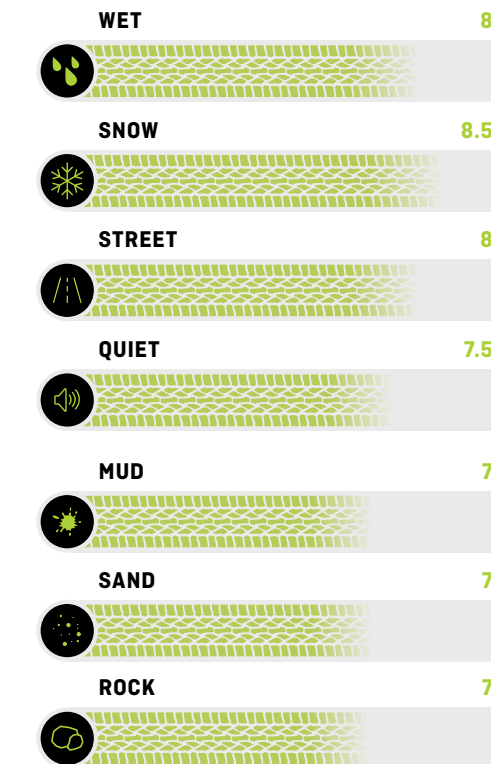

### AVAILABLE SIZES

See page 31 for detailed sizing specifications

235/65R16C	245/65R17	LT245/70R17	LT315/70R17	33x12.50R17LT	245/60R18	265/60R18
265/65R18	LT265/70R18	LT275/65R18	37x13.50R18LT	275/60R20	LT285/60R20	33x12.50R20LT
35x12.50R20LT	37x12.50R20LT	275/50R22	285/45R22	305/35R24		

# TRAIL BLADE A/T



**50K**  
MILE WARRANTY  
ALL-TERRAIN TIRES

## DURABLE ALL-TERRAIN FOR WORK OR PLAY


Perfect for the ready-to-roll driver who demands strength, durability, and all-terrain performance.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)



- JAGGED SIPE GRIPS**  
Delivers optimal traction in all seasons.
- WIDE CHANNEL VACUUMS**  
Linked to the lateral channels to vacuum water from the contact patch.
- CENTER TREAD CONTROLS**  
Interlocked for stability and siped for traction in any weather condition.

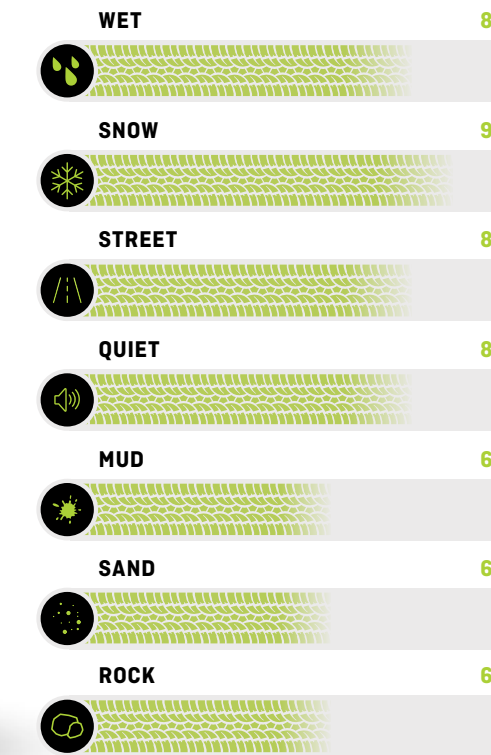

### AVAILABLE SIZES

See page 32 for detailed sizing specifications

LT235/75R15	30x9.50R15LT	31x10.5R15LT	LT215/85R16	LT225/75R16	235/70R16	LT235/85R16	245/70R16
245/75R16	LT245/75R16	255/70R16	265/70R16	LT265/75R16	LT285/75R16	LT235/80R17	245/65R17
LT245/75R17	265/65R17	265/70R17	LT265/70R17	265/60R18	265/70R18	275/65R18	275/55R20
275/60R20	285/55R20						


OFF-ROAD TIRES



# TRAIL BLADE BOSS SXS



- HIGH VOID RATIO BITES**  
 Creates massive biting edges and a tread pattern that cleans out with ease.
- ALTERNATING SHOULDER BLOCKS GRAB**  
 Tackles extreme terrain with the crushing power the Trail Blade BOSS is known for.
- SPLIT TREAD BLOCKS CLEAR**  
 Allows water and debris to flow through without sacrificing tread strength.

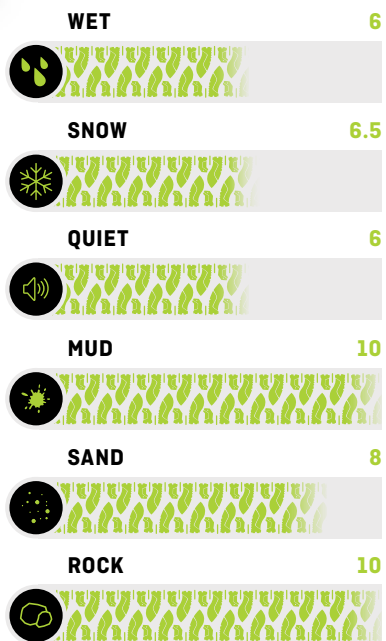

**AVAILABLE SIZES**

28x10.00R14	29x9.00R14	29x11.00R14	30x10.00R14
30x11.00R14	30x10.00R15	30x11.00R15	32x10.00R15
32x11.00R15	33x10.00R15	35x10.00R15	

See page 33 for detailed sizing specifications



SEE THIS TIRE ON ATTURO.COM


## RELENTLESS POWER WITH NO COMPROMISES

Plow through deep mud, sand, and rocks with the ultimate off-road tread at your side.

# TRAIL BLADE X/T SXS



- HYBRID PATTERN EXCELS**  
 Offers 90% of the off-road traction of an M/T, with a smoother ride on hard pack.
- LARGE SHOULDER BLOCKS DIG**  
 Provides exceptional traction in off-road conditions, similar to that of an M/T.
- SIPING AND STUD PINS GRIP**  
 Delivers elite traction and grip in rain, shine, or snow (especially when studded).

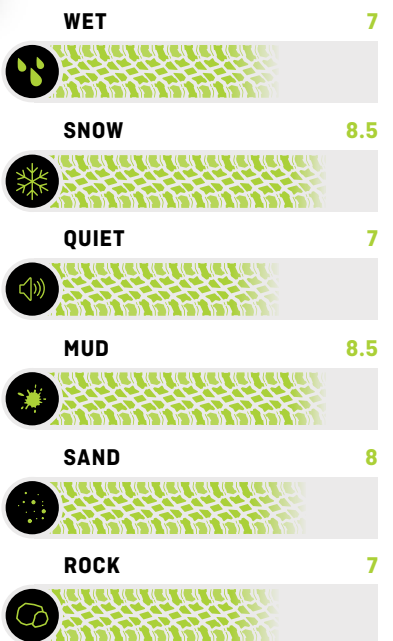

**AVAILABLE SIZES**

28x10.00R14	29x9.00R14	29x11.00R14	30x10.00R14
30x11.00R14	30x10.00R15	30x11.00R15	32x10.00R15
32x11.00R15	33x10.00R15	35x10.00R15	

See page 34 for detailed sizing specifications



SEE THIS TIRE ON ATTURO.COM

## THE BEST OF BOTH WORLDS

Outfit your UTV with a stylish tire built to juggle mud, sand and hard pack.

SPECIALTY TIRES

# AZ850



Power-hungry handling for SUVs, Sport Trucks, Crossovers, & Muscle Cars.



## THE STRONG & SILENT TYPE


This ultra-high performance tire delivers secure braking, handling, and durability.



SEE THIS TIRE ON [ATTURO.COM](https://www.atturo.com)



- MAIN CHANNEL FLUSHES**  
Provides increased grip in wet road conditions.
- CENTER TREAD STABILIZES**  
Improves straight-line stability for a solid "on center" feel.
- SHOULDER TREAD BLOCK CORNERS**  
Remains rigid under stress for precise and predictable turning.

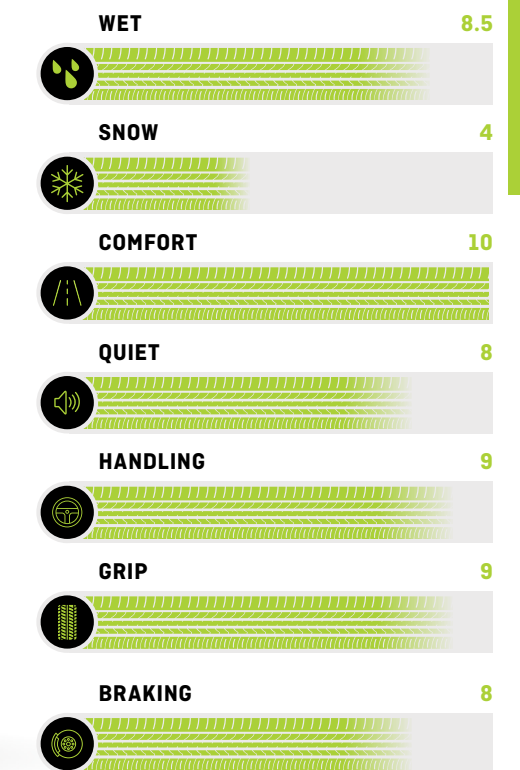

PERFORMANCE TIRES

### AVAILABLE SIZES

See pages 35 and 36 for detailed sizing specifications


### RUN FLATS

235/60R18	245/50R18	255/55R18	235/55R19	245/55R19	255/40R19	255/50R19	265/50R19	275/40R19	285/35R19
285/45R19	305/30R19	235/40R20	235/45R20	245/40R20	245/45R20	255/35R20	255/50R20	265/35R20	265/45R20
275/35R20	275/40R20	275/45R20	275/50R20	285/30R20	285/35R20	285/40R20	285/45R20	295/40R20	295/45R20
305/30R20	305/35R20	LT305/50R20	315/30R20	315/35R20	255/40R21	265/40R21	275/45R21	285/40R21	295/35R21
295/40R21	275/35R22	275/40R22	285/30R22	285/35R22	285/40R22	295/30R22	305/35R22	315/30R22	335/25R22
245/50RF18	255/55RF18	255/50RF19	285/45RF19	275/40RF20	315/35RF20				

# AZ850DR



- DUAL WIDE CHANNELS QUIETS**  
 Reduces tire noise both on the road and on the drag strip.
- EXTRA-WIDE CENTER STABILIZES**  
 Delivers improved, handling, and "on center" feel at race speeds.
- DIRECTIONAL SHOULDER GRIPS**  
 Generates immediate launching traction with the help of an extra sticky compound.

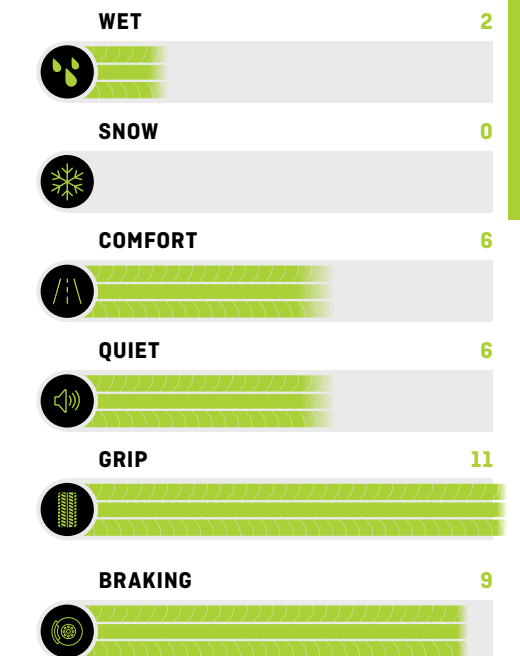

## A COMPLEMENT THAT REALLY STICKS

A rear-axle complement to AZ850 on muscle cars, extra-sticky drag radials deliver elite stability from start to finish.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)

### AVAILABLE SIZES

See page 37 for detailed sizing specifications

315/40R18	285/35R19	305/30R19	275/40R20	285/30R20	285/35R20
305/30R20	305/35R20	315/30R20	315/35R20	335/30R20	

# AZ610



## GO ON TOUR

A super sharp all season tire that delivers a smooth, quiet ride.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)



### SLOPED SHOULDER CORNERS


Provides stable steering during aggressive cornering.

### RIB SLOT QUIETS

Helps reduce road noise at both high and low speeds.

### GROOVE FLUSHES

Improves water and slush evacuation while enhancing straight-line stability.

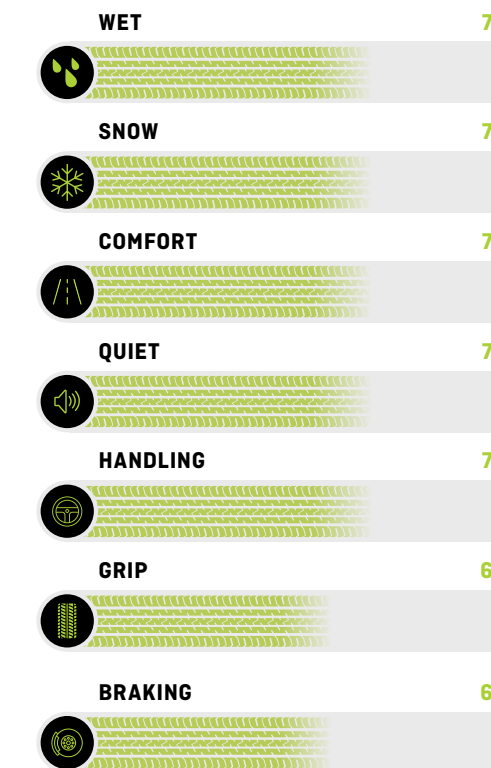

PERFORMANCE TIRES

### AVAILABLE SIZES

See page 38 for detailed sizing specifications

205/70R15	215/70R15	225/70R15	215/70R16	225/70R16	235/70R16	245/70R16	265/70R16
265/75R16	225/65R17	235/65R17	235/70R17	245/65R17	245/70R17	265/65R17	265/70R17
235/55R18	255/55R18	265/60R18	265/50R20	275/55R20	285/50R20		

# CV400



## VANTASTIC PERFORMANCE

Outfit your fleet with a tire that can take heavy loads while delivering a smooth ride in wet and dry conditions.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)



**INTERLOCKING TREAD STABILIZES**


Optimized for high load-carrying capacity.

**SHOULDER BLOCKS HANDLE**

Provides excellent traction in wet and dry conditions.

**CENTER RIB GRIPS**

Improve traction and braking in wet and dry conditions.

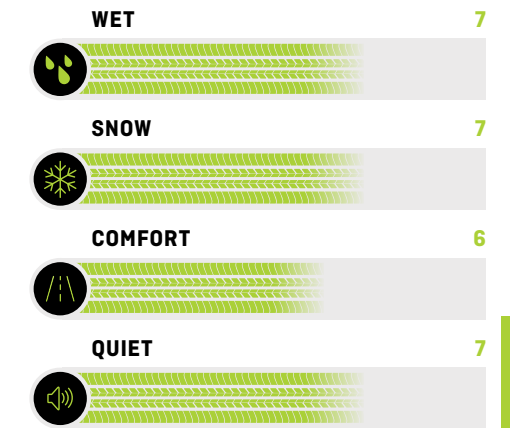

SPECIALTY TIRES

### AVAILABLE SIZES


See page 39 for detailed sizing specifications

205/65R16C	205/75R16C	215/65R16C	215/75R16C	225/75R16C	235/65R16C
------------	------------	------------	------------	------------	------------

# ST200



- INTERLOCKING TREAD QUIETS**  
Keeps your ride smooth and easy.
- CHANNELS GRIP**  
Provides excellent traction in wet and dry conditions.
- CENTER RIB STABILIZES**  
Tracks your tow vehicle on the highway and keeps your trailer stable behind you.

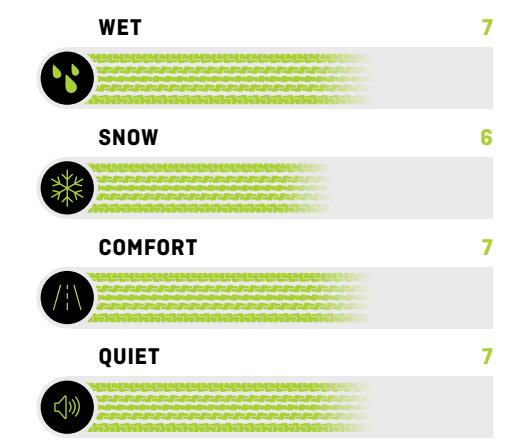

## WORK HARD PLAY HARDER

Engineered to handle heavy loads with ease, while providing a smooth ride in all conditions.



SEE THIS TIRE ON [ATTURO.COM](http://ATTURO.COM)

### AVAILABLE SIZES

See page 40 for detailed sizing specifications

145R12 10 PR	ST175/80R13 6PR	ST185/80R13 6PR	ST205/75R14 8PR	ST215/75R14 8PR	ST205/75R15 8PR
ST225/75R15 8PR	ST225/75R15 10PR	ST235/80R16 10PR	ST235/85R16 12PR	ST235/80R16 14PR	ST235/85R16 14PR

SPECIALTY TIRES

# TIRE SPECS

- Trail Blade BOSS ..... 27
- Trail Blade MTS ..... 28
- Trail Blade M/T ..... 29
- Trail Blade X/T ..... 30
- Trail Blade ATS ..... 31
- Trail Blade A/T ..... 32
- Trail Blade SXS ..... 33-34
- AZ850 ..... 35-36
- AZ850 DR ..... 37
- AZ610 ..... 38
- CV400 ..... 39
- ST200 ..... 40



## TRAIL BLADE BOSS

See page 3 for more Trail Blade BOSS details

	Atturo Item Number	Size	Speed Rating/Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)
<b>15"</b>	TBBO-J53D5AFA	35x13.50R15LT	121Q	8 PR	34.8	13.6	11	8.5 - 11.0	22	81.6	50	3197	-
	TBBO-J5QE7ATA	37x12.50R17LT	124Q	8 PR	36.9	13.3	10	8.5 - 11.0	22	84.4	50	3527	-
<b>17"</b>	TBBS-J5QE7ATB	37x12.50R17LT	124Q	8 PR	36.9	13.3	10	8.5 - 11.0	22	88.2	50	3527	-
	TBBO-J53G7ATA	40X13.50R17LT	136Q	10 PR	39.8	13.6	11	8.5 - 11.0	22	102	65	4938	-
	TBBS-J53G7ATB	40x13.50R17LT	136Q	10 PR	39.8	13.6	11	8.5 - 11.0	22	109.6	65	4938	-
<b>18"</b>	TBBO-J53E8ATA	37x13.50R18LT	128Q	10 PR	36.8	13.6	11	8.5 - 11.0	22	88.6	65	3968	-
	TBBO-J5NH0BFA	LT325/60R20	126/123Q	10 PR	35.6	13	9.5	9.0 - 12.0	22	79.4	65	3748	3417
	TBBO-J5SK0AFA	LT375/45R20	126Q	10 PR	33.5	15	12.5	12.0 - 14.0	22	76.5	65	3748	-
<b>20"</b>	TBBO-J5S10AFA	LT375/55R20	128Q	8 PR	36.2	15.4	12	11.0 - 14.0	22	89.5	50	3968	-
	TBBO-J56F0AFA	38x14.50R20LT	124Q	8 PR	37.8	14.6	12	10.0 - 12.0	22	90.4	50	3527	-
	TBBO-J56G0AFA	40x14.50R20LT	129Q	8 PR	39.8	14.6	12	10.0 - 12.0	22	96.1	50	4079	-
	TBBO-J5RLBAFA	LT355/40R22	122Q	12 PR	33.4	14.2	12.5	12.0 - 14.0	22	74.5	80	3307	-
<b>22"</b>	TBBO-J5SKBAFA	LT375/45R22	128Q	12 PR	35.6	15	12.5	12.0 - 14.0	22	84	80	3968	-
	TBBO-J56GBAFA	40x14.50R22LT	132Q	10 PR	39.8	14.6	12	10.0 - 12.0	22	101	65	4409	-
	TBBO-J5SLDAFA	LT375/40R24	126Q	12 PR	36.1	15.2	13.5	12.5 - 15.0	22	85.5	80	3748	-
<b>24"</b>	TBBO-J53FDAFA	38x13.50R24LT	123Q	10 PR	37.8	13.6	11	8.5 - 11.0	21	82	65	3417	-
	TBBO-J56GDAFA	40x14.50R24LT	128Q	10 PR	39.8	14.6	12	10.0 - 12.0	21	98.3	65	3968	-
	TBBO-J52IDAF	42x15.50R24LT	130Q	8 PR	41.8	15.4	12	11.0 - 14.0	22	113.1	50	4189	-

Indicates Sticky Compound NO DOT (For Off-Road Use Only)



## TRAIL BLADE MTS

See page 5 for more Trail Blade MTS details

	Atturo Item Number	Size	Speed Rating/Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
<b>17"</b>	TBMS-MFT2MA	37x12.50R17LT	124Q	8 PR	TBD	TBD	10	8.0 - 10.5	21	74.2	80	3197	-	-
	TBMS-ML5T2MA	LT325/65R18	127/124T	10 PR	TBD	TBD	9.5	9.5 - 11.5	21	74.2	65	3858	3527	-
<b>18"</b>	TBMS-LH5T2MA	33x12.50R18LT	122Q	12 PR	33.1	12.5	10	8.5 - 11.0	21	74.2	80	3307	-	-
	TBMS-LK5T2MA	35x12.50R18LT	128Q	12 PR	35	12.5	10	8.5 - 11.0	21	75.8	80	3968	-	-
	TBMS-JFJM2MA	LT295/55R20	123/120Q	10 PR	33	12.2	9.5	8.5 - 10.5	19.4	69	80	3417	3086	-
<b>20"</b>	TBMS-PEJT2MA	33x13.50R20LT	121Q	12 PR	33.1	13.6	11	9.5 - 12.0	21	73.1	80	3197	-	-
	TBMS-L73D0AFA	35x13.50R20LT	126Q	12 PR	35	13.6	11	9.5 - 12.0	21	75.7	80	3748	-	-
	TBMS-HDLT2MA	285/45R22	114S XL	-	32.1	11.2	9.5	9.0 - 10.5	16	43.9	50	2601	-	500 A B
<b>22"</b>	TBMS-HFLT2MA	LT285/55R22	124/121Q	10 PR	34.6	11.7	9	8.5 - 10.0	19.4	66	80	3527	3197	-
	TBMS-PCLT2MA	33x13.50R22LT	114Q	10 PR	33.1	13.6	11	9.5 - 12.0	21	67.9	65	2601	-	-
	TBMS-PELT2MA	35x13.50R22LT	123Q	12 PR	35	13.6	11	9.5 - 12.0	21	78	80	3417	-	-
	TBMS-PBNT2MA	33x13.50R24LT	107Q	10 PR	33.1	13.6	11	9.5 - 12.0	21	69.3	65	2149	-	-
<b>24"</b>	TBMS-L73DDAFE	35x13.50R24LT	116Q	10 PR	35	13.6	12	11.5 - 13.5	21	73.3	65	2756	-	-
	TBMS-PENT2MA	37x13.50R24LT	124Q	12 PR	36.8	13.6	11	9.5 - 12.0	21	80.2	80	3527	-	-
	TBMS-WART2MA	LT385/30R26	125Q	12 PR	TBD	TBD	14	TBD	21	85.5	80	3638	-	-
<b>26"</b>	TBMS-PBRT2MA	35x13.50R26LT	123Q	12 PR	TBD	TBD	11	TBD	21	74.2	80	3417	-	-
	TBMS-PCRT2MA	37x13.50R26LT	125Q	12 PR	TBD	TBD	11	9.5 - 12.0	21	81.1	80	3638	-	-



# TRAIL BLADE M/T

See **page 7** for more Trail Blade M/T details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
16"	TBMT-BNEM2MA	LT235/85R16	120/116Q	10 PR	TBD	TBD	6.5	6.0 - 7.5	21	48.7	80	3086	2756	-
	TBMT-CREM2MA	LT245/75R16	120/116Q	10 PR	TBD	TBD	7	6.5 - 8.0	21	48.3	80	3086	2756	-
	TBMT-EREM2MA	LT265/75R16	123/120Q	10 PR	31.9	10.4	7.5	7.0 - 9.0	21	55.8	80	3417	3086	-
	TBMT-HREM2MA	LT285/75R16	126/123Q	10 PR	33.1	11.3	8	7.5 - 9.5	21	61.2	80	3748	3417	-
17"	TBMT-EKFM2MA	LT265/70R17	121/118Q	10 PR	31.9	10.7	8	7.0 - 9.0	21	56.9	80	3197	2910	-
	TBMT-LLFM2MA	33x12.50R17LT	114Q	8 PR	32.8	12.5	10	8.5 - 11.0	21	66	50	2601	-	-
	TBMT-LKFM2MA	35x12.50R17LT	121Q	10 PR	34.8	12.5	10	8.0 - 10.5	21	70.7	65	3197	-	-
18"	TBMT-FL5M2MA	LT275/65R18	123/120Q	10 PR	32.3	11	8	8.0 - 9.5	21	59.2	80	3417	3086	-
	TBMT-FK5M2MA	LT275/70R18	125/122Q	10 PR	33.2	11	8	7.0 - 9.0	19	60	80	3638	3307	-
	TBMT-LH5M2MA	33x12.50R18LT	118Q	10 PR	32.8	12.5	10	8.5 - 11.0	21	65.5	65	2910	-	-
	TBMT-LK5M2MA	35x12.50R18LT	123Q	10 PR	34.8	12.5	10	8.5 - 11.0	21	70.9	65	3417	-	-
19"	TBMT-PK5M2MA	37x13.50R18LT	128Q	10 PR	36.5	13.6	11	9.0 - 11.5	20	79.8	65	3968	-	-
	TBMT-DFHM2MA	255/55R19	111S XL	-	30	10.4	8	7.0 - 9.0	16	43.1	50	2403	-	540 A B
20"	TBMT-HEJM2MA	LT285/50R20	119/116R	10 PR	31.5	11.7	9	8.5 - 10	20	57.5	80	2998	2756	-
	TBMT-LEJM2MA	33x12.50R20LT	114Q	10 PR	32.8	12.5	10	8.5 - 11.0	21	64.9	65	2601	-	-
	TBMT-LHJM2MA	35x12.50R20LT	121Q	10 PR	34.8	12.5	10	8.5 - 11.0	21	70.5	65	3197	-	-
22"	TBMT-PLJM2MA	37x13.50R20LT	127Q	10 PR	36.8	13.6	11	9.5 - 12.0	21	82.4	65	3858	-	-
	TBMT-LDLM2MA	33x12.50R22LT	109Q	10 PR	32.8	12.5	10	8.5 - 11.0	21	62.8	65	2271	-	-
	TBMT-LELM2MA	35x12.50R22LT	117Q	10 PR	34.8	12.5	10	8.5 - 11.0	21	70.2	65	2833	-	-
	TBMT-PFLM2MA	37x13.50R22LT	123Q	10 PR	36.8	13.6	11	9.5 - 12.0	21	81.3	65	3417	-	-



# TRAIL BLADE X/T

See **page 9** for more Trail Blade X/T details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
17"	TBXT-BLFR3PA	235/65R17	108H XL	-	29	9.5	7	6.5 - 8.5	14	34.4	50	2205	-	460 A B
	TBXT-DRFR3LA	LT255/75R17	111/108S	6 PR	32.3	10	7	6.5 - 8.5	16	48.5	50	2403	2205	-
	TBXT-HKFR3LA	LT285/70R17	121/118Q	10 PR	33	11.5	8.5	7.5 - 9.5	16	55.6	80	3197	2910	-
	TBXT-JKFR3LA	LT295/70R17	121/118Q	10 PR	TBD	TBD	8.5	7.5 - 10.0	16	58.4	80	3197	2910	-
18"	TBXT-LKFR3LA	35x12.50R17LT	121Q	10 PR	34.8	12.5	10	8.0 - 10.5	18	61.7	65	3197	-	-
	TBD	37x12.50R17LT	124Q	8 PR	TBD	TBD	10	8.0 - 10.5	18	TBD	50	3527	-	-
	TBXT-BH5R3PA	235/60R18	107H XL	-	29.1	9.5	7	6.5 - 8.5	14	33.7	50	2149	-	460 A B
	TBXT-DK5R3LA	LT255/70R18	117/114S	8 PR	32.3	10.2	7.5	6.5 - 8.5	17	48.9	65	2833	2601	-
19"	TBXT-FK5R3LA	LT275/70R18	125/122Q	10 PR	33.5	11.4	8	7.0 - 8.5	18	61.1	80	3638	3307	-
	TBXT-HH5R3PA	285/60R18	120H XL	-	31.4	11.5	8.5	8.0 - 10.0	14	44.1	50	3086	-	460 A B
	TBXT-HL5R3LA	LT285/65R18	125/122R	10 PR	32.8	11.5	8.5	8.5 - 10.0	16	53.8	80	3638	3307	-
	TBXT-JK5R3LA	LT295/70R18	129/126Q	10 PR	34.6	11.5	8.5	7.5 - 10.0	18	62.2	80	4079	3748	-
20"	TBXT-LH5R3LA	33x12.50R18LT	118Q	10 PR	32.8	12.5	10	8.5 - 11.0	18	63.1	65	2910	-	-
	TBXT-LK5R3LA	35x12.50R18LT	123Q	10 PR	34.8	12.5	10	8.5 - 11.0	20	59.5	65	3417	-	-
	TBXT-EEJR3PA	265/50R20	112H XL	-	30.5	10.9	8.5	7.5 - 9.5	14	40.1	50	2469	-	-
	TBXT-EHJR3LA	LT265/60R20	121/118S	10 PR	32.8	10.7	8	8.0 - 9.5	16	52	80	3197	2910	-
21"	TBXT-FDJR3PA	275/45R20	110H XL	-	29.8	10.7	9	8.5 - 10.5	14	44.1	50	2337	-	460 A B
	TBXT-FFJR3PA	275/55R20	117S XL	-	31.9	11.2	8.5	7.5 - 9.5	14	46.1	50	2833	-	460 A B
	TBXT-FLJR3LA	LT275/65R20	126/123Q	10 PR	34.3	10.9	8	7.5 - 9.5	18	57.3	80	3748	3417	-
	TBXT-HFJR3LA	LT285/55R20	122/119Q	10 PR	32.6	11.3	9	8.0 - 10.0	18	55.3	80	3307	2998	-
22"	TBXT-JHJR3LA	LT295/60R20	126/123R	10 PR	34.2	11.8	8.5	8.5 - 10.5	16	62.6	80	3748	3417	-
	TBXT-KEJR3LA	LT305/50R20	121/118S	12 PR	32.3	12.4	9.5	9.0 - 11.0	16	57.3	80	3197	2910	-
	TBXT-KFJR3LA	LT305/55R20	121/118Q	10 PR	33.5	12.5	9.5	8.5 - 11.0	18	61.3	65	3197	2910	-
	TBXT-LEJR3LA	33x12.50R20LT	114Q	10 PR	32.8	12.5	10	8.5 - 11.0	20	60	65	2601	-	-
24"	TBXT-LHJR3LA	35x12.50R20LT	121Q	10 PR	34.8	12.5	10	8.5 - 11.0	18	64.3	65	3197	-	-
	TBXT-FDLR3PA	275/45R22	112H XL	-	31.9	10.6	9	8.5 - 10.5	14	43.4	50	2469	-	460 A B
	TBXT-KDLR3PA	305/45R22	118H XL	-	32.9	11.9	10	9.5 - 11.5	14	52.2	50	2910	-	460 A B
	TBXT-J3NJB AFD	LT325/50R22	122S	10 PR	35.2	12.5	10	9.0 - 12.0	18	66.8	65	3307	-	-
26"	TBXT-HCNR3PA	285/40R24	112H XL	-	33.1	11.1	10	9.5 - 11.0	14	45.9	50	2469	-	460 A B
	TBXT-J3NKDAFD	LT325/45R24	120S	10 PR	35.7	12.9	11	9.0 - 12.0	14	59.7	65	3086	-	-
	TBXT-J3QJDAFD	LT345/50R24	125Q	10 PR	37.6	14.1	11	10.0 - 12.0	18	84.7	65	3638	-	-
	TBXT-KARR3PA	305/30R26	116H XL	-	TBD	TBD	11	TBD	14	47.6	49	2756	-	-





# TRAIL BLADE ATS

See page 11 for more Trail Blade ATS details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
16"	TBAS-BLER4CA	235/65R16C	121/119R	10 PR	TBD	TBD	7	6.5 - 7.5	TBD	39	83	3197	2998	-
	TBAS-P8DG7ATA	245/65R17	111T XL	-	29.5	9.8	7	7.0 - 8.5	14	36.6	50	2403	-	540 A B
17"	TBAS-P9DF7AFA	LT245/70R17	119/116S	10 PR	30.6	9.8	7	6.5 - 8.0	16	47.2	80	2998	2756	-
	TBAS-LKFR4LA	LT315/70R17	121/118Q	10 PR	TBD	TBD	9.5	8.0 - 10.5	TBD	66.1	65	3197	2910	-
	TBAS-P9QC7AFE	33x12.50R17LT	120Q	10 PR	33.1	12.5	10	8.5 - 11.0	16	66	65	3086	-	-
18"	TBAS-CH5R4PA	245/60R18	109Q XL	-	29.6	9.8	7	7.0 - 8.5	14	36.6	50	2271	-	540 A B
	TBAS-P8FH8ATA	265/60R18	110S	-	30.5	10.7	8	7.5 - 9.5	14	43.4	44	2337	-	540 A B
	TBAS-P8FG8AFA	265/65R18	116T XL	-	31.5	10.7	8	7.5 - 9.5	12	42.8	50	2756	-	540 A B
	TBAS-EK5R4LA	LT265/70R18	124/121S	10 PR	32.6	10.7	8	7.0 - 9.0	16	59.1	80	3527	3197	-
20"	TBAS-FL5R4PA	LT275/65R18	123/120S	10 PR	32.1	11	8	8.0 - 9.5	16	61.5	80	3417	3086	-
	TBAS-PK5R4LA	37x13.50R18LT	128Q	10 PR	TBD	TBD	11	9.0 - 11.5	TBD	73.6	65	3970	-	-
	TBAS-FHJR4PA	275/60R20	116T XL	-	33	11	8	7.5 - 9.5	12	TBD	44	2679	-	540 A B
	TBAS-HHJR4LB	LT285/60R20	125/122S	10 PR	33.5	11.5	8.5	8.5 - 10.0	16	61.9	80	3638	3307	-
	TBAS-LEJR4LA	33x12.50R20LT	121Q	12 PR	33.1	12.5	10	8.5 - 11.0	16	64.2	80	3197	-	-
22"	TBAS-LHJR4LA	35x12.50R20LT	126Q	12 PR	35	12.5	10	8.5 - 11.0	16	70	80	3748	-	-
	TBAS-LKJR4LA	37x12.50R20LT	126Q	10 PR	TBD	TBD	10	8.5 - 11.0	TBD	71.2	65	3748	-	-
24"	TBAS-FELR4PA	275/50R22	115H XL	-	TBD	TBD	8.5	7.5 - 9.5	TBD	45.9	42	2679	-	540 A B
	TBAS-P8HKBAFA	285/45R22	114H XL	-	32.1	11.2	9.5	9.0 - 10.5	12	40.8	50	2601	-	540 A B
	TBAS-KBNR4PA	305/35R24	112H XL	-	32.4	12.3	11	10.0 - 12.0	12	47	50	2469	-	540 A B



# TRAIL BLADE A/T

See page 13 for more Trail Blade A/T details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
15"	TBAT-I0041294	LT235/75R15	104/101S	6 PR	28.9	9.3	6.5	6.0 - 8.0	15	36.6	50	1984	1819	-
	TBAT-I0041297	30x9.50R15LT	104S	6 PR	29.5	9.4	7.5	6.0 - 8.0	15	38.8	50	1984	-	-
16"	TBAT-I0041295	31x10.50R15LT	109S	6 PR	30.5	10.6	8.5	7.0 - 9.0	15	45.4	50	2271	-	-
	TBAT-I0041293	LT215/85R16	115/112S	10 PR	30.4	8.5	6	5.5 - 7.0	14	39	80	2679	2469	-
	TBAT-I0041290	LT225/75R16	115/112S	10 PR	29.3	8.8	6	6.0 - 7.5	14	39	80	2679	2469	-
	TBAT-I0048346	235/70R16	106T	-	29	9.4	7	6.0 - 8.0	13	35.3	44	2094	-	540 A B
17"	TBAT-I0041291	LT235/85R16	120/116S	10 PR	31.7	9.3	6.5	6.0 - 7.5	15	44.3	80	3086	2756	-
	TBAT-I0048345	245/70R16	111T XL	-	29.5	9.8	7	6.5 - 8.0	13	37.5	50	2403	-	540 A B
	TBAT-I0066633	245/75R16	111T	-	30.5	9.8	7	6.5 - 8.0	13	37.7	44	2403	-	540 A B
	TBAT-I0041289	LT245/75R16	120/116S	10 PR	30.5	9.8	7	6.5 - 8.0	15	44.5	80	3086	2756	-
	TBAT-I0048344	255/70R16	111T	-	30.1	10.2	7.5	6.5 - 8.5	13	40.1	44	3403	-	540 A B
	TBAT-I0048343	265/70R16	112T	-	30.6	10.7	8	7.0 - 9.0	13	42.5	44	2469	-	540 A B
18"	TBAT-I0041288	LT265/75R16	123/120S	10 PR	31.7	10.5	7.5	7.0 - 9.0	15	48.7	80	3417	3086	-
	TBAT-I0066644	LT285/75R16	126/123S	10 PR	32.8	11.3	8	7.5 - 9.5	15	49.6	80	3748	3417	-
	TBAT-I0048348	LT235/80R17	120/117S	10 PR	31.8	9.3	6.5	6.0 - 8.0	15	46.3	80	3086	2833	-
	TBAT-I0048341	245/65R17	107T	-	29.5	9.8	7	7.0 - 8.5	13	37.3	44	2149	-	540 A B
	TBAT-I0048347	LT245/75R17	121/118S	10 PR	31.5	9.8	7	6.5 - 8.0	15	48.1	80	3197	2910	-
	TBAT-I0048340	265/65R17	112T	-	30.6	10.7	8	7.5 - 9.5	13	41.9	44	2469	-	540 A B
	TBAT-I0048342	265/70R17	115T	-	31.7	10.7	8	7.0 - 9.0	13	48.5	44	2679	-	540 A B
	TBAT-I0041287	LT265/70R17	121/118S	10 PR	31.7	10.7	8	7.0 - 8.5	15	47.6	80	3197	2910	-
20"	TBAT-I0066630	265/60R18	110T	-	30.5	10.7	8	7.5 - 9.5	13	39	44	2337	-	540 A B
	TBAT-I0048339	265/70R18	116T	-	32.6	10.7	8	7.0 - 9.0	13	46.3	44	2756	-	540 A B
22"	TBAT-I0066634	275/65R18	116T	-	32.1	11	8	7.5 - 9.5	13	46.7	44	2756	-	540 A B
	TBAT-I0066638	275/55R20	117T XL	-	31.9	11.2	8.5	7.5 - 9.5	13	43.4	44	2833	-	540 A B
24"	TBAT-I0048338	275/60R20	115T	-	33	11	8	7.5 - 9.5	13	47.6	44	2679	-	540 A B
	TBAT-I0066642	285/55R20	115T	-	32.4	11.7	9	8.0 - 10.0	13	44.3	44	2679	-	540 A B



# TRAIL BLADE BOSS SXS

See [page 15](#) for more Trail Blade BOSS SxS details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)
14"	SXBO-U1LT4ATA	28x10.00R14	70N	8 PR	28.2	10.2	8	6.0 - 8.5	23	TBD	38	739
	SXBO-U1JU4ATA	29x9.00R14	74N	8 PR	29.2	9.5	7	5.0 - 7.5	23	TBD	38	827
	SXBO-U1NU4ATA	29x11.00R14	75N	8 PR	29.2	11.5	9	6.5 - 9.5	23	TBD	38	852
	SXBO-U1LA4ATA	30x10.00R14	74N	8 PR	30.2	10.5	8	6.0 - 8.5	23	TBD	38	827
	SXBO-U1NA4ATA	30x11.00R14	77N	8 PR	30.2	11.5	9	6.5 - 9.5	23	TBD	38	908
	SXBO-U1LA5ATA	30x10.00R15	73N	8 PR	30.5	10.5	8	6.0 - 8.5	23	TBD	38	805
15"	SXBO-U1NA5ATA	30x11.00R15	75N	8 PR	30.5	11.2	9	6.5 - 9.5	23	TBD	38	852
	SXBO-U1LV5ATA	32x10.00R15	78N	8 PR	32.2	10.5	8	6.0 - 8.5	23	TBD	38	937
	SXBO-U1NV5ATA	32x11.00R15	79N	8 PR	32.5	11.2	9	6.5 - 9.5	23	TBD	38	936
	SXBO-U1LC5ATA	33x10.00R15	80N	8 PR	33	10.5	8	6.0 - 8.5	23	TBD	38	992
	SXBO-U1LD5ATA	35x10.00R15	84N	8 PR	35	10.5	8	6.0 - 8.5	23	TBD	38	1102



# TRAIL BLADE X/T SXS

See [page 16](#) for more Trail Blade X/T SxS details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)
14"	SXXT-U2LT4ATA	28x10.00R14	70N	8 PR	28.2	10.2	8	6.0 - 8.5	23	TBD	38	739
	SXXT-U2JU4ATA	29x9.00R14	74N	8 PR	29.2	9.5	7	5.0 - 7.5	23	TBD	38	827
	SXXT-U2NU4ATA	29x11.00R14	75N	8 PR	29.2	11.5	9	6.5 - 9.5	23	TBD	38	852
	SXXT-U2LA4ATA	30x10.00R14	74N	8 PR	30.2	10.5	8	6.0 - 8.5	23	TBD	38	827
	SXXT-U2NA4ATA	30x11.00R14	77N	8 PR	30.2	11.5	9	6.5 - 9.5	23	TBD	38	908
	SXXT-U2LA5ATA	30x10.00R15	73N	8 PR	30.5	10.5	8	6.0 - 8.5	23	TBD	38	805
15"	SXXT-U2NA5ATA	30x11.00R15	75N	8 PR	30.5	11.2	9	6.5 - 9.5	23	TBD	38	852
	SXXT-U2LV5ATA	32x10.00R15	78N	8 PR	32.2	10.5	8	6.0 - 8.5	23	TBD	38	937
	SXXT-U2NV5ATA	32x11.00R15	79N	8 PR	32.5	11.2	9	6.5 - 9.5	23	TBD	38	936
	SXXT-U2LC5ATA	33x10.00R15	80N	8 PR	33	10.5	8	6.0 - 8.5	23	TBD	38	992
	SXXT-U2LD5ATA	35x10.00R15	84N	8 PR	35	10.5	8	6.0 - 8.5	23	TBD	38	1102



# AZ850

See page 17 for more AZ850 details

Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
AZ850-A7CH8AFE	235/60R18	107Y XL	-	28.8	9.4	7	6.5 - 8.5	10	30.9	50	2149	-	320 A A
AZ850-A7DJ8AFE	245/50R18	104Y XL	-	27.7	9.9	7.5	7.0 - 8.5	10	29.8	50	1984	-	320 A A
18" AZ850-A7E18AFE	255/55R18	109Y XL	-	29.1	10.2	8	7.0 - 9.0	10	32	50	2271	-	320 A A
AZ850-A8DJ8DFE	245/50RF18	104V XL RFT	-	27.8	10.1	7.5	7.0 - 8.5	10	45	50	1984	-	320 A A
AZ850-A8E18DFE	255/55RF18	109 V XL RFT	-	29.3	10.4	8	7.0 - 9.0	10	48.9	50	2271	-	320 A A
AZ850-A7C19AFE	235/55R19	105Y XL	-	29.2	9.6	7.5	6.5 - 8.5	10	30.4	50	2039	-	320 A A
AZ850-A7D19AFE	245/55R19	103V	-	29.8	9.8	7.5	7.0 - 8.5	10	32.4	44	1929	-	320 A A
AZ850-DCHR2PA	255/40R19	100Y XL	-	27.1	10.1	10	8.5 - 10.0	10	27.6	50	1764	-	320 A A
AZ850-A7EJ9AFE	255/50R19	107Y XL	-	29.1	10.3	8	7.0 - 9.0	10	34.2	50	2149	-	320 A A
AZ850-A7FJ9AFE	265/50R19	110Y XL	-	29.4	11	8.5	7.5 - 9.5	10	34.2	50	2337	-	320 A A
19" AZ850-FCHR2PA	275/40R19	105Y XL	-	27.7	10.9	9.5	9.0 - 11.0	10	33.3	50	2039	-	320 A A
AZ850-HBHR2PA	285/35R19	103Y XL	-	26.9	11.4	10	9.5 - 11.0	10	33.7	50	1929	-	320 A A
AZ850-A7HK9AFE	285/45R19	111Y XL	-	29.1	11.1	9.5	9.0 - 10.5	10	34.6	50	2403	-	320 A A
AZ850-KAHR2PA	305/30R19	102Y XL	-	26.3	12.3	11	10.5 - 11.5	10	33.3	50	1874	-	320 A A
AZ850-A8EJ9DFE	255/50RF19	107W XL RFT	-	29.4	10.3	8	7.0 - 9.0	10	44.3	50	2149	-	320 A A
AZ850-A8HK9DFE	285/45RF19	111W XL RFT	-	29.2	11.3	9.5	9.0 - 10.5	10	46.1	50	2403	-	320 A A
AZ850-BCJR2PA	235/40R20	96Y XL	-	27.5	9.5	8.5	8.0 - 9.0	10	27.6	50	1565	-	320 A A
AZ850-BDJR2PA	235/45R20	100Y XL	-	28.4	9.1	8	7.5 - 9.0	10	28	50	1764	-	320 A A
AZ850-CCJR2PA	245/40R20	99Y XL	-	27.7	9.8	8.5	8.0 - 9.5	10	30	50	1709	-	320 A A
AZ850-CDJR2PA	245/45R20	103Y XL	-	28.5	10.1	8	7.5 - 9.0	10	30.9	50	1929	-	320 A A
AZ850-DBJR2PA	255/35R20	97Y XL	-	27	10.2	9	8.5 - 10.0	10	30	50	1906	-	320 A A
AZ850-DEJR2PA	255/50R20	109Y XL	-	30.2	10.4	8	7.0 - 9.0	10	36.6	50	2271	-	320 A A
20" AZ850-EBJR2PA	265/35R20	99Y XL	-	27.3	10.7	9.5	9.0 - 10.5	10	33.5	50	1709	-	320 A A
AZ850-EDJR2PA	265/45R20	108Y XL	-	29.4	10.5	9	8.5 - 10.0	10	33.1	50	2205	-	320 A A
AZ850-FBJR2PA	275/35R20	102Y XL	-	27.6	10.9	9.5	9.0 - 11.0	10	33.3	50	1874	-	320 A A
AZ850-FCJR2PA	275/40R20	106Y XL	-	28.7	10.9	9.5	9.0 - 11.0	10	33.1	80	2094	-	320 A A
AZ850-FDJR2PA	275/45R20	110Y XL	-	29.8	10.6	9	8.5 - 10.5	10	34.8	50	2337	-	320 A A
AZ850-FEJR2PA	275/50R20	113Y XL	-	31.1	11.1	8.5	7.5 - 9.5	10	38.8	50	2535	-	320 A A
AZ850-HAJR2PA	285/30R20	99Y XL	-	26.6	11.4	10	9.5 - 10.5	10	33.1	50	1709	-	320 A A

## AZ850 CONTINUED

Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
AZ850-HBJR2PA	285/35R20	104Y XL	-	27.9	11.4	10	9.5 - 11.0	10	34.8	50	1984	-	320 A A
AZ850-HCJR2PA	285/40R20	108Y XL	-	29.1	11.5	10	9.5 - 11.0	10	33.5	50	2205	-	320 A A
AZ850-HDJR2PA	285/45R20	112Y XL	-	30.2	11	9.5	9.0 - 10.5	10	34.2	50	2469	-	320 A A
TBD	295/40R20	110Y XL	-	29.3	11.9	10.5	10.0 - 11.5	10	36.4	50	2337	-	320 A A
AZ850-JDJR2PA	295/45R20	114Y XL	-	30.7	11.5	10	9.5 - 11.0	10	37	50	2601	-	320 A A
20" AZ850-KAJR2PA	305/30R20	103Y XL	-	27.2	12.3	11	10.5 - 11.5	10	35.3	50	1929	-	320 A A
AZ850-KBJR2PA	305/35R20	107Y XL	-	28.4	12.3	11	10.0 - 12.0	10	37.9	50	2149	-	320 A A
AZ850-KEJR2LA	LT305/50R20	123/121H	12 PR	32	12.4	9.5	8.5 - 11.0	10	53.8	80	3415	3195	-
AZ850-LAJR2PA	315/30R20	104Y XL	-	27.5	12.6	11	10.5 - 11.5	10	36.8	50	1984	-	320 A A
AZ850-LBJR2PA	315/35R20	110Y XL	-	28.7	12.2	11	10.5 - 12.5	10	35.5	50	2337	-	320 A A
AZ850-A8GLODFE	275/40RF20	106W XL RFT	-	28.7	10.9	9.5	9.0 - 11.0	10	40.8	50	2094	-	320 A A
AZ850-A8KMODFE	315/35RF20	110W XL RFT	-	28.5	12.5	11	10.5 - 12.5	10	42.5	50	2337	-	320 A A
AZ850-A7ELAAFE	255/40R21	102Y XL	-	29	10.2	9	8.5 - 10.0	10	32	50	1874	-	320 A A
AZ850-A7FLAAFE	265/40R21	105Y XL	-	29.4	10.3	9.5	9.0 - 10.5	10	34	50	2039	-	320 A A
21" AZ850-A7GKAAFE	275/45R21	110Y XL	-	30.8	10.6	9	8.5 - 10.5	10	34.4	50	2337	-	320 A A
AZ850-A7HLAAFE	285/40R21	109Y XL	-	30.1	11.1	10	9.5 - 11.0	10	37	50	2271	-	320 A A
AZ850-JBKR2PA	295/35R21	107Y XL	-	29.1	11.5	10.5	10.0 - 11.5	10	36.2	50	2149	-	320 A A
AZ850-JCKR2PA	295/40R21	111Y XL	-	30.3	11.7	10.5	10.0 - 11.5	10	38.3	50	2403	-	320 A A
AZ850-A7GMBAFE	275/35R22	104Y XL	-	29.6	10.9	9.5	9.0 - 11.0	10	35.7	50	1984	-	320 A A
AZ850-A7GLBAFE	275/40R22	108Y XL	-	30.7	10.8	9.5	9.0 - 11.0	10	35.3	50	2205	-	320 A A
AZ850-A7HNBAFE	285/30R22	101Y XL	-	28.8	11.4	10	9.5 - 10.5	10	34.4	50	1819	-	320 A A
AZ850-A7HMBAFE	285/35R22	106Y XL	-	30	11.3	10	9.5 - 11.0	10	35.5	50	2094	-	320 A A
22" AZ850-A7HLBATE	285/40R22	110Y XL	-	31	11.4	10	9.5 - 11.0	10	39	50	2337	-	320 A A
AZ850-A7INBAFE	295/30R22	103Y XL	-	29.1	11.8	10.5	10.0 - 11.0	10	36.4	50	1929	-	320 A A
AZ850-A7JMBAFE	305/35R22	110Y XL	-	30.6	12.2	11	10.0 - 12.0	10	38.4	50	2337	-	320 A A
AZ850-A7KNBAFE	315/30R22	107Y XL	-	29.7	12.3	11	10.5 - 11.5	10	37.9	50	2149	-	320 A A
AZ850-A7PPBAFE	335/25R22	105Y XL	-	28.8	13.2	12	11.5 - 12.5	10	40.8	50	2039	-	320 A A

Indicates the AZ850 run flats.



# AZ850DR

See [page 19](#) for more AZ850 DR details

	Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
<b>18"</b>	DR850-D3KL8ATA	315/40R18	108Y XL	-	27.9	12.6	11	10.5-12.5	4.6	TBD	50	2205	-	100 A A
<b>19"</b>	DR850-D3HM9ATA	285/35R19	103Y XL	-	26.9	11.4	10	9.5-11.0	4.6	TBD	50	1929	-	100 A A
	DR850-D3JN9ATA	305/30R19	102Y XL	-	26.3	12.3	11	10.5-11.5	4.6	TBD	50	1874	-	100 A A
	DR850-D3GLOATA	275/40R20	106Y XL	-	28.7	10.9	9.5	9.0-11.0	4.6	TBD	50	2094	-	100 A A
	DR850-D3HNOATA	285/30R20	99Y XL	-	26.8	11.4	10	9.5-10.5	4.6	TBD	50	1709	-	100 A A
	DR850-D3HMOATA	285/35R20	104Y XL	-	26.9	11.4	10	9.5-11.0	4.6	TBD	50	1984	-	100 A A
<b>20"</b>	DR850-D3JNOATA	305/30R20	103Y XL	-	27.2	12.3	11	10.5-11.5	4.6	TBD	50	1929	-	100 A A
	DR850-D3JMOATA	305/35R20	107Y XL	-	27.9	12.3	11	10.0-12.0	4.6	TBD	50	2149	-	100 A A
	DR850-D3KNOATA	315/30R20	104Y XL	-	27.5	12.6	11	10.5-11.5	4.6	TBD	50	1984	-	100 A A
	DR850-D3KMOATA	315/35R20	110Y XL	-	28.7	12.6	11	10.5-12.5	4.6	TBD	50	2337	-	100 A A
	DR850-D3PNOATA	335/30R20	108Y XL	-	28	13.5	12	11.5-12.5	4.6	TBD	50	2205	-	100 A A



# AZ610

See [page 21](#) for more AZ610 details

	Atturo Item Number	Size	Speed Rating/ Load Index	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)	UTQG
<b>15"</b>	AZ610-I0064532	205/70R15	96H	26.3	8.2	6	5.0 - 7.0	10	25.8	44	1565	-	560 A A
	AZ610-I0064522	215/70R15	98H	26.9	8.7	6.5	5.5 - 7.0	10	28.2	44	1653	-	560 A A
	AZ610-I0064528	225/70R15	100H	27.4	9	6.5	6.0 - 7.5	10	30.4	44	1764	-	560 A A
	AZ610-I0064519	215/70R16	100H	27.9	8.7	6.5	5.5 - 7.0	10	29.5	44	1764	-	560 A A
	AZ610-I0064520	225/70R16	103H	28.4	9	6.5	6.0 - 7.5	10	30.9	44	1929	-	560 A A
<b>16"</b>	AZ610-I0064510	235/70R16	106H	29	9.4	7	6.0 - 8.0	10	31.5	44	2094	-	560 A A
	AZ610-I0064512	245/70R16	111H XL	29.5	9.8	7	6.5 - 8.0	10	35.1	50	2403	-	560 A A
	AZ610-I0064511	265/70R16	112H	30.6	10.7	8	7.0 - 9.0	10	39	44	2469	-	560 A A
	AZ610-I0064534	265/75R16	116T	31.7	10.5	7.5	7.0 - 9.0	10	41	44	2756	-	560 A A
	AZ610-I0064513	225/65R17	102H	28.5	9	6.5	6.0 - 8.0	10	29.3	44	1874	-	560 A A
	AZ610-I0064516	235/65R17	108H XL	29.1	9.4	7	6.5 - 8.5	10	31.7	50	2205	-	560 A A
	AZ610-I0064527	235/70R17	111H XL	30	9.4	7	6.0 - 8.0	10	34.2	50	2403	-	560 A A
<b>17"</b>	AZ610-I0064515	245/65R17	111H XL	29.5	9.8	7	7.0 - 8.5	10	34	50	2403	-	560 A A
	AZ610-I0064517	245/70R17	110H	30.6	9.8	7	6.5 - 8.0	10	36.2	44	2337	-	560 A A
	AZ610-I0064526	265/65R17	112H	30.6	10.7	8	7.5 - 9.5	10	39	44	2469	-	560 A A
	AZ610-I0064535	265/70R17	115H	31.7	10.7	8	7.0 - 9.0	10	39.7	44	2679	-	560 A A
	AZ610-I0064521	235/55R18	104V XL	28.1	9.6	7.5	6.5 - 8.5	10	31.1	50	1984	-	560 A A
<b>18"</b>	AZ610-I0064524	255/55R18	109V XL	29	10.4	8	7.0 - 9.0	10	35.7	50	2271	-	560 A A
	AZ610-I0064523	265/60R18	110H	30.5	10.7	8	7.5 - 9.5	10	38.6	44	2337	-	560 A A
	AZ610-I0064530	265/50R20	112V XL	30.5	10.9	8.5	7.5 - 9.5	10	39.9	50	2469	-	560 A A
<b>20"</b>	AZ610-I0064525	275/55R20	117V XL	31.9	11.2	8.5	7.5 - 9.5	10	41.9	50	2833	-	560 A A
	AZ610-I0064533	285/50R20	112V	31.3	11.7	9	8.0 - 10.0	10	41.7	44	2469	-	560 A A



# CV400

See [page 23](#) for more CV400 details

16"

Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)
CV400-10066653	205/65R16C	107/105R	8 PR	26.5	8.2	6	5.5 - 6.5	11	27.6	69	2149	2039
CV400-10066649	205/75R16C	110/108R	8 PR	28.1	8	5.5	5.5 - 6.5	11	31.2	69	2337	2205
CV400-10066647	215/65R16C	109/107R	8 PR	27	8.7	6.5	6.0-7.0	11	29.7	69	2271	2149
CV400-10066650	215/75R16C	113/111R	8 PR	28.7	8.5	6	5.5 - 7.0	11	33	69	2535	2403
CV400-10066652	225/75R16C	121/120R	10 PR	29.3	8.8	6	6.0 - 7.0	11	35	83	3197	3086
CV400-10066645	235/65R16C	121/119R	10 PR	28	9.4	7	6.5 - 7.5	11	34.7	83	3197	2998



# ST200

See [page 25](#) for more ST200 details

12"

13"

14"

15"

16"

Atturo Item Number	Size	Speed Rating/ Load Index	Ply Rating	Overall Diameter (in)	Section Width (in)	Meas. Rim	Approved Rim Width	Tread Depth (32nds)	Weight (lbs)	Max PSI	Max Load Single (lbs)	Max Load Dual (lbs)
ST200-1451210	145R12 10 PR	95/90L	10PR	21.3	5.8	4	4	9	13.2	50	1520	1320
ST200-175136	ST175/80R13 6PR	91/87L	6PR	24	7	5	4.5 - 5.5	9	15.8	65	1360	1200
ST200-185136	ST185/80R13 6PR	94/89L	6PR	24.6	7.2	6	4.5 - 6.0	9	17	50	1480	1280
ST200-205148	ST205/75R14 8PR	105/101L	8PR	26.1	8	5.5	5.0 - 6.5	10	22.9	65	2040	1820
ST200-215148	ST215/75R14 8PR	108/103L	8PR	26.7	8.5	5.5	5.5 - 7.0	10	22.9	65	2205	1930
ST200-205158	ST205/75R15 8PR	107/102L	8PR	27.1	8	5.5	5.0 - 6.5	10	23.8	65	2150	1870
ST200-225158	ST225/75R15 8PR	113/108L	8PR	28.3	8.8	6	6.0 - 7.0	10	27.3	80	2540	2200
ST200-2251510	ST225/75R15 10PR	117/112L	10PR	28.3	8.8	6	6.0 - 7.0	10	28.9	80	2830	2470
ST200-2351610	ST235/80R16 10PR	124/120L	10PR	30.8	9.3	6.5	6.0 - 7.5	10	33.7	95	3520	3080
ST200-2351612	ST235/85R16 12PR	129/125L	12PR	31.8	9.3	6.5	6.0 - 7.5	11	37	80	4080	3640
ST240-2351614	ST235/80R16 14PR	129/125L	14PR	30.8	9.3	6.5	6 - 7.5	11	56.2	110	4080	3640
ST260-2351614	ST235/85R16 14PR	132/127L	14PR	31.8	9.3	6.5	6 - 7.5	11	57.5	110	4400	3860



855.632.8031  
INFO@ATTURO.COM  
ATTURO.COM

 @AtturoTires

 @AtturoTires

 @AtturoTires

 Atturo Tires



**ATTURO**  
GO YOUR OWN WAY.