


SHANDONG
LINGLONG TYRE
CO.,LTD.


TIRE CATALOGUE

PCR TIRE
TBR TIRE
SPECIALTY TIRE



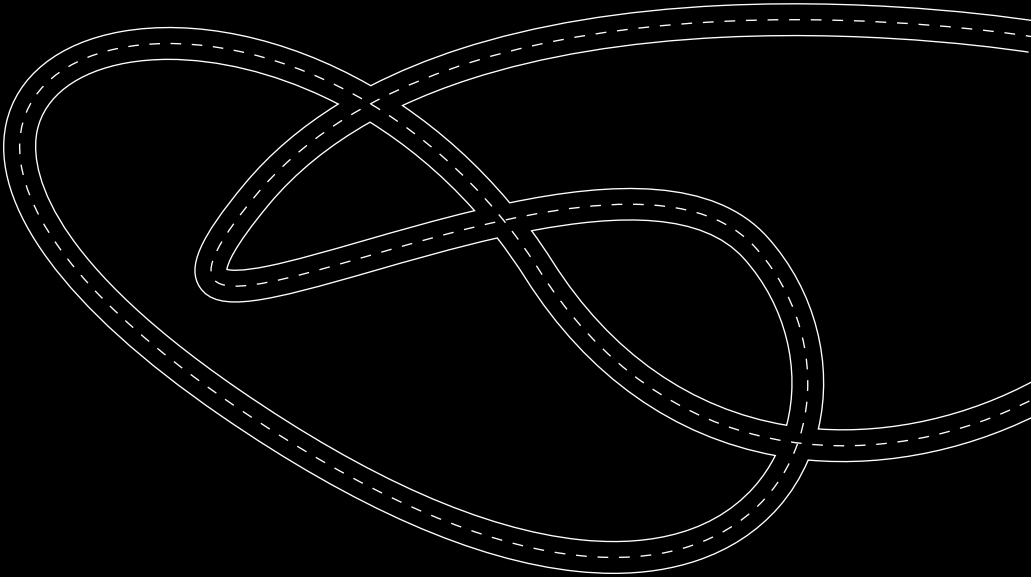

**THE WORLD AT
YOUR REACH**

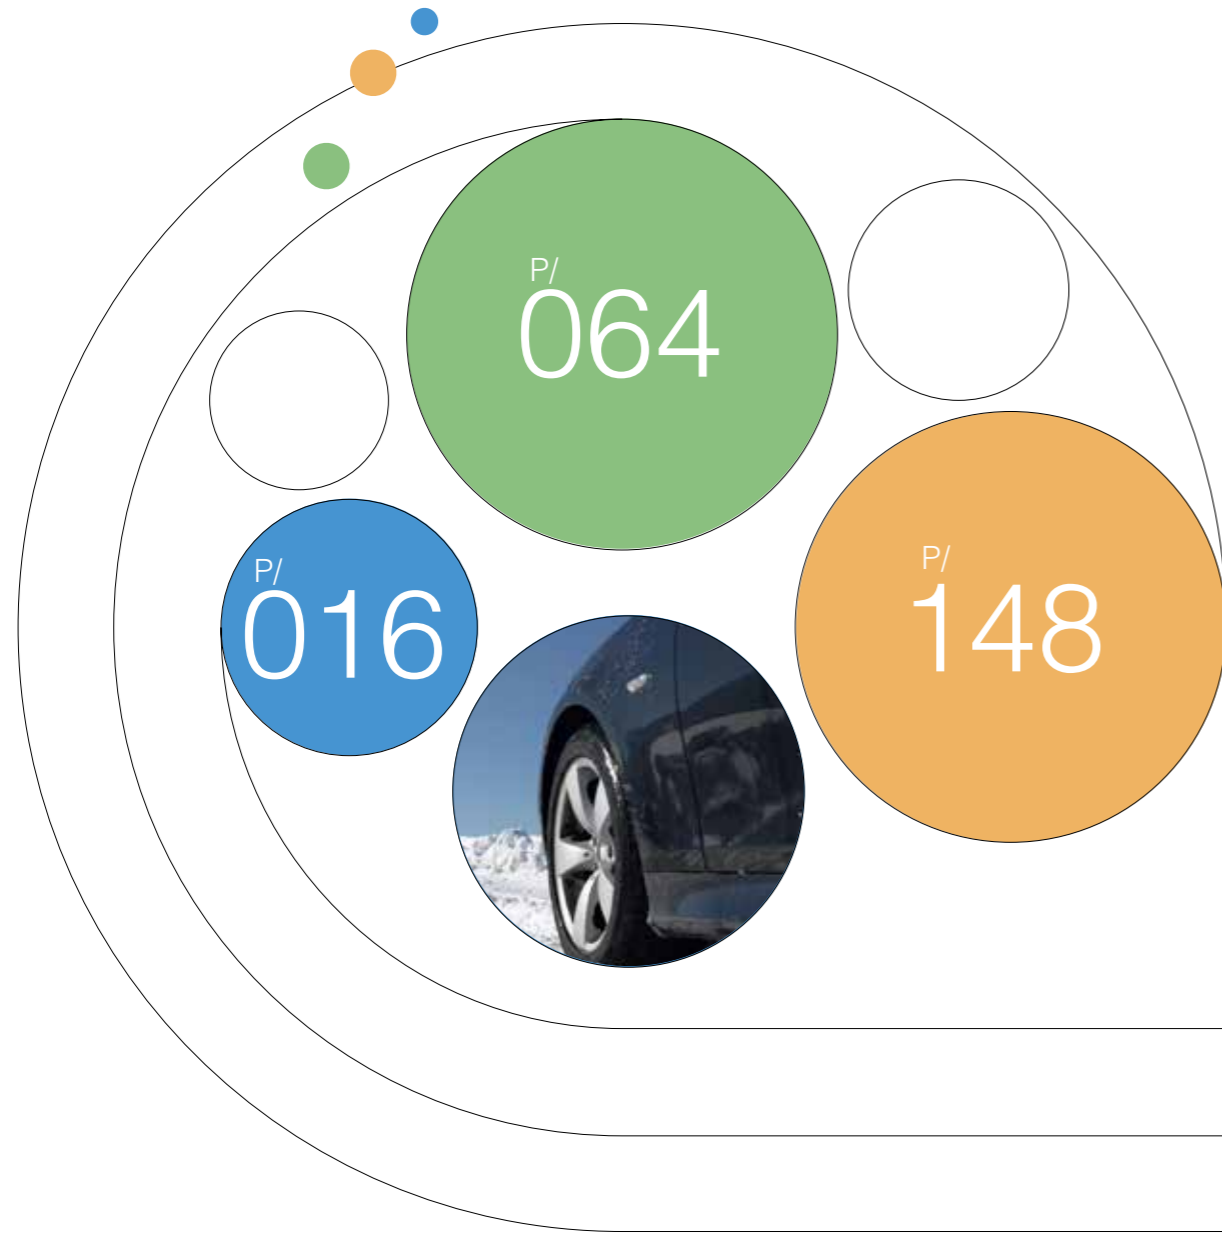

P/006
**COMPANY
INTRODUCTION**

P/012
**DISPLAY OF LINGLONG'S
STRENGTH**

P/008
SPORTS EVENTS

P/014
GLOBAL STRATEGIC LAYOUT

CONTENTS

PCR TIRE

TBR TIRE

SPECIALTY TIRE

COMPANY INTRODUCTION

Shandong Linglong Tyre Co., Ltd., founded in 1975, has been among top 20 global tire manufacturers and top 3 Chinese tire manufacturers with over 40-year forging ahead. Currently, the company has six R&D centers, seven manufacturing bases across the world, and over 16,000 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets, including Linglong, ATLAS, LEAO and EVOLUXX etc. Linglong Tire had successful access to the A share market on July 6, 2016. It has been included in the three international indexes, the MSCI Index, the FTSE Russell Index and the S&P Emerging Market Indexes, winning the unanimous favor of the international capital market.

Through its leading innovative strength, Linglong successfully developed dandelion rubber tire, graphene reinforced tread tire, racing tire, 3D printing polyurethane tire, run-flat tire, and low odor tire, leaving a positive and far-reaching impact on environmental protection and industry development. It was awarded Second Prize of National Award for Technological Invention, Second National Prize for Progress in Science and Technology and China Industry Award which is the highest award in China's industry field.


The company's products are exported to over 180 countries and regions across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers. It successfully provides OE tire for Red flag state guest car and becomes global suppliers of world first class automakers like Audi, Volkswagen, Ford, Renault-Nissan and GM etc.

In the future, the company will fully implement its 6+6 global layout and six internationalization, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern. Until now, the company has obtained over 700 authorized patents in total, undertaken 91 national and industry standards formulation, as well as 11 national innovation projects.

Linglong has sponsored over 90 sports events and teams worldwide, such as Juventus and VfL Wolfsburg, to enhance its brand awareness and influence. It strengthens the retail network construction, with more than 30,000 marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service. To attracting more target consumers, the company launches at airports and high-speed rail stations in major cities across the world and several CCTV programs. For many years, Linglong has been participating SEMA show and Automechanika Dubai etc. to enhance its product reputation and build the international brand image. Its brand value reached RMB 45.369 billion in 2019.

In order to promote its high-quality global industrial layout and increase its core brand competitiveness in global market, Linglong formulates its 6+6 global layout to build six Chinese manufacturing bases as well as six overseas manufacturing bases. At present, the company has four Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun (under construction) and two overseas manufacturing bases in Thailand and Serbia (under construction). Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 6+6 global layout, and fully utilizing global resources and expanding its global tire market.




SHANDONG
LINGLONG TYRE
CO.,LTD.

SPORTS EVENTS



Official Tire Partner of Juventus



Club of Champions Partner
of VfL Wolfsburg

Sponsor China Volleyball
Super League from
2017 to 2020





The Official Automotive Tire of the NHL Tampa Bay Lightning from 2019 to 2020




Linglong sponsored Serbian SuperLiga from 2019 to 2020



Linglong Tire Youth Football Training Camp jointly established with VfL Wolfsburg



Set up Linglong Tire Drift Team for D1 GRAND PRIX in Japan

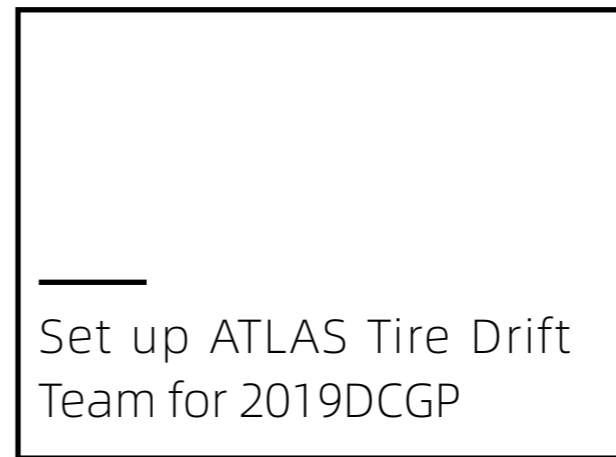




DISPLAY OF LINGLONG'S STRENGTH

OEMs

Linglong invests in the construction of Sino-Asia Tire Proving Ground



GLOBAL STRATEGIC LAYOUT

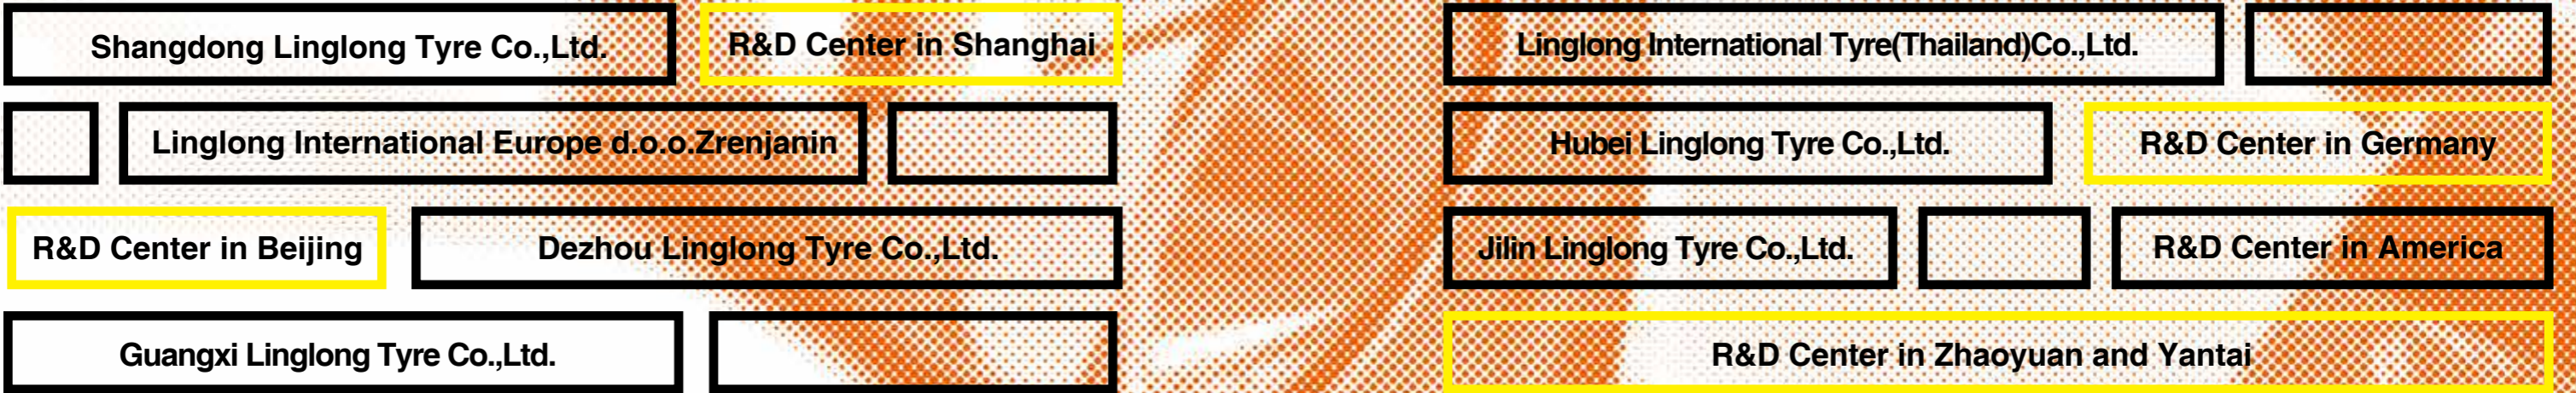

An aerial photograph of a rugged mountain landscape. A narrow, winding asphalt road curves through a valley with patches of green and reddish-brown vegetation. In the distance, several large, flat-topped mountains rise against a sky filled with dramatic, grey clouds. A bright light source, likely the sun, is breaking through the clouds, casting a golden glow over the scene. Three small, irregularly shaped lakes are visible in the valley to the left. A white rectangular box with a thin border is superimposed on the right side of the image, containing the text 'PCR TIRE' in a bold, white, sans-serif font, with a small horizontal line underneath the 'P'.

Passenger Car Tire



AR200

New

Excellent handling and comfortable performance

1. Asymmetric tread pattern design for better drainage performance inside and grip performance outside.
2. Big shoulder blocks to effectively improve handling performance.
3. 4 longitudinal groove design for superior driving stability and comfortable ride.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
17	195/45R17 XL	85	V	6 1 / 2J	515	290	608	195	6.3
	225/45R17 XL	94	W	7 1 / 2J	670	290	634	225	7.5
18	215/45R18 XL	93	W	7J	650	290	651	213	7.0
	235/45R18 XL	98	W	8J	750	290	669	236	7.0
	275/45R18 XL	107	W	9J	975	290	705	273	7.0
19	225/40R19 XL	93	Y	8J	650	290	663	230	6.3
	225/45R19 XL	96	W	7 1 / 2J	710	290	685	225	7.0
	225/55R19 XL	103	Y	7J	875	290	731	233	6.8
	235/40R19 XL	96	Y	8 1 / 2J	710	290	671	241	6.8
	255/30R19 XL	91	Y	9J	615	290	637	260	6.8
	235/50R19 XL	103	Y	7 1 / 2J	875	290	719	245	6.8
	255/45R19 XL	104	W	8 1 / 2J	900	290	713	255	7.0
20	275/40R19 XL	105	Y	9 1 / 2J	925	290	703	278	6.8
	245/40R20 XL	99	Y	8 1 / 2J	775	290	704	248	6.8
	245/45R20 XL	103	W	8J	875	290	728	243	7.0
	255/35R20 XL	97	Y	9J	730	290	686	260	6.8
	255/45R20 XL	105	W	8 1 / 2J	925	290	738	255	7.0
	265/30R20 XL	94	Y	9 1 / 2J	670	290	668	271	6.8
21	275/35R20 XL	102	Y	9 1 / 2J	850	290	700	278	6.8
	295/35R21 XL	107	W	10 1 / 2J	975	290	739	301	6.8



AR200 RFT

New

Super ability Run-Flat tire

1. Asymmetric tread pattern design provides more stable driving and riding
2. Big shoulder blocks to effectively improve handling performance.
3. Carry linglong LRS run-flat technology for the safety of the vehicle driving escort.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	225/55RF16	95	W	7J	690	250	654	233	7.0
17	225/45RF17	91	W	7 1/2J	615	250	634	225	7.0
	225/50RF17	94	W	7J	670	250	658	233	7.5
	225/55RF17	97	W	7J	730	250	680	233	7.0
18	245/40RF18	93	W	8 1/2J	650	250	653	248	7.0
	245/45RF18	96	W	8J	710	250	677	243	7.0
19	225/40RF19	89	W	8J	580	250	663	230	7.0
	245/40RF19	94	W	8 1/2J	670	250	679	248	7.0
	245/45RF19	98	W	8J	750	250	703	243	7.0
20	275/40RF20	102	W	9 1/2J	850	250	728	278	7.0



GREEN-Max All Season New

All Season Tire

1. Excellent handling;
2. Lower rolling resistance;
3. All season tire which is applicable to different weather and road conditions.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	145/70R13	71	T	4.50B	345	250	534	150	6.2
	145/80R13	75	T	4.00B	387	240	562	145	6.2
	155/65R13	73	T	4.50B	365	250	532	157	6.2
	155/70R13	75	T	4.50B	387	250	548	157	7.0
	155/80R13	79	T	4.50B	437	240	578	157	7.0
	165/70R13	79	T	5.00B	437	250	562	170	7.0
	175/65R13	80	T	5.00B	450	250	558	177	6.2
	175/70R13	82	T	5.00B	475	250	576	177	7.0
	155/65R14	75	T	4 1/2J	387	250	558	157	7.0
14	165/60R14	75	H	5J	387	250	554	170	7.0
	165/65R14	79	T	5J	437	250	570	170	7.0
	165/70R14	81	T	5J	462	250	588	170	7.0
	175/65R14	82	T	5J	475	250	584	177	7.0
	175/80R14	88	T	5J	560	240	636	177	6.2
	185/55R14	80	H	6J	450	250	560	194	6.2
	185/60R14	82	H	5 1/2J	475	250	578	189	7.0
	175/70R14 XL	88	T	5J	560	290	602	177	7.0
	185/65R14	86	H	5 1/2J	530	250	596	189	6.2
	185/70R14	88	H	5 1/2J	560	250	616	189	6.2
	195/70R14	91	T	6J	615	250	630	201	6.7
	15	165/60R15	77	H	5J	412	250	579	170
165/65R15		81	T	5J	462	250	595	170	6.2
175/65R15 XL		88	T	5J	560	290	609	177	7.0
185/55R15		82	H	6J	475	250	585	194	7.0
185/60R15 XL		88	H	5 1/2J	560	290	603	189	7.0
185/65R15		88	H	5 1/2J	560	250	621	189	7.0
195/50R15 XL		86	H	6J	530	290	577	201	7.0
195/55R15		85	H	6J	515	250	595	201	7.0
195/60R15		88	H	6J	560	250	615	201	7.0
195/65R15		91	H	6J	615	250	635	201	7.0
205/65R15		94	H	6J	670	250	647	209	7.0
215/65R15		96	H	6 1/2J	710	250	661	221	6.7

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	195/45R16 XL	84	H	6 1/2J	500	290	582	195	6.7
	195/50R16 XL	88	V	6J	560	290	602	201	6.7
	195/55R16	87	H	6J	545	250	620	201	7.0
	205/45R16	83	V	7J	487	250	590	206	6.7
	205/55R16	91	V	6 1/2J	615	250	632	214	7.0
	205/60R16 XL	96	H	6J	710	290	652	209	7.0
	215/45R16 XL	90	V	7J	600	290	600	213	6.7
	215/55R16 XL	97	V	7J	730	290	642	226	7.0
	215/60R16 XL	99	H	6 1/2J	775	290	664	221	7.0
	215/65R16 XL	102	V	6 1/2J	850	290	686	221	6.7
	215/70R16	100	H	6 1/2J	800	250	708	221	6.7
	225/55R16 XL	99	V	7J	775	290	654	233	6.7
225/60R16 XL	102	V	6 1/2J	850	290	676	228	6.7	
17	205/45R17 XL	88	V	7J	560	290	616	206	6.7
	205/50R17 XL	93	V	6 1/2J	650	290	638	214	7.0
	205/55R17 XL	95	V	6 1/2J	690	290	658	214	7.0
	215/40R17 XL	87	V	7 1/2J	545	290	604	218	6.7
	215/45R17 XL	91	V	7J	615	290	626	213	6.7
	215/50R17 XL	95	V	7J	690	290	648	226	7.0
	215/55R17 XL	98	V	7J	750	290	668	226	7.0
	215/60R17 XL	100	V	6 1/2J	800	290	690	221	7.0
	225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.0
	225/50R17 XL	98	V	7J	750	290	658	233	7.0
	225/55R17 XL	101	V	7J	825	290	680	233	7.0
	225/60R17 XL	103	V	6 1/2J	875	290	702	228	6.7
	225/65R17	102	H	6 1/2J	850	250	724	228	6.7
	235/45R17 XL	97	V	8J	730	290	644	236	6.7
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	6.7
	235/65R17 XL	108	V	7J	1000	290	738	240	6.7
	245/45R17 XL	99	V	8J	775	290	652	243	6.7
	18	215/55R18 XL	99	V	7J	775	290	693	226
225/40R18 XL		92	V	8J	630	290	637	230	6.7
225/45R18 XL		95	V	7 1/2J	690	290	659	225	6.7
245/40R18 XL		97	V	8 1/2J	730	290	653	248	7.0
19	225/35R19 XL	88	V	8J	560	290	641	230	6.7
	235/35R19 XL	91	V	8 1/2J	615	290	647	241	6.7



GREEN-Max

UHP Tire with Excellent Wet Grip and Low Noise

1. Excellent handling performance;
2. Improved drainage performance to effectively reduce risk of hydroplaning;
3. Superior driving stability;
4. Comfortable ride;
5. Designed to fit premium cars and sports cars.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	185/45R15	75	V	6J	387	250	547	183	7.5
	195/45R15	78	V	6 1/2J	425	250	557	195	6.8
16	195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.6
	205/45R16 XL	87	W	7J	545	290	590	206	7.6
	205/50R16	87	W	6 1/2J	545	250	612	214	7.6
	205/50R16	87	V	6 1/2J	545	250	612	214	7.6
	205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.6
	215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.6
	215/45R16 XL	90	V	7J	600	290	600	213	7.3
	215/55R16 XL	97	W	7J	730	290	642	226	7.6
	225/50R16 XL	96	V	7J	710	290	632	233	7.6
	225/55R16	95	V	7J	690	250	654	233	7.6
17	185/35R17 XL	82	V	6 1/2J	475	290	562	188	7.5
	195/40R17 XL	81	V	8J	462	290	588	200	7.5
	205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.6
	205/45R17 XL	88	W	7J	560	290	616	206	7.6
	205/45R17 XL	88	V	7J	560	290	616	206	7.6
	205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.6
	215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.6
	215/45R17 XL	91	W	7J	615	290	626	213	7.6
	215/50R17 XL	95	V	7J	690	290	648	226	7.6
	215/50R17 XL	95	W	7J	690	290	648	226	7.6
	215/55R17	94	V	7J	670	250	668	226	7.6
	215/55R17 XL	98	W	7J	750	290	668	226	7.6
	225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.6
	225/50R17 XL	98	W	7J	750	290	658	233	7.6
	225/55R17	97	W	7J	730	250	680	233	7.6
	225/55R17 XL	101	W	7J	825	290	680	233	7.6
	235/45ZR17 XL	97	W	8J	730	290	644	236	7.6
	235/50R17	96	Y	7 1/2J	710	250	668	245	7.6
	245/40R17	91	W	8 1/2J	615	250	628	248	7.6
	245/45R17 XL	99	W	8J	775	290	652	243	7.6

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
18	185/35R18	81	H	6 1/2J	462	290	587	186	6.8
	195/35R18 XL	88	W	7J	560	290	594	200	6.8
	205/35R18 XL	81	H	7 1/2J	462	290	601	212	6.8
	205/40R18 XL	86	W	7 1/2J	530	290	621	212	6.8
	215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.6
	215/40R18 XL	89	W	7 1/2J	580	290	629	218	7.6
	215/45R18 XL	93	W	7J	650	290	651	213	7.6
	225/40R18 XL	92	W	8J	630	290	637	230	7.6
	225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.6
	235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.6
	235/45R18 XL	98	Y	8J	750	290	669	236	7.3
	235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.6
	245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.6
	245/45R18 XL	100	W	8J	800	290	677	243	7.6
19	255/35R18 XL	94	Y	9J	670	290	635	260	7.5
	255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.6
	265/35R18 XL	97	Y	9 1/2J	730	290	643	271	7.6
	215/35R19 XL	85	W	7 1/2J	515	290	633	218	6.8
	225/35R19 XL	88	W	8J	560	290	641	230	7.6
	225/45R19 XL	96	W	7 1/2J	710	290	685	225	7.6
	225/50R19 XL	107	V	7J	975	290	709	233	6.8
	225/55R19	99	H	7J	775	250	731	233	6.8
	235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.6
	235/55R19 XL	105	W	7 1/2J	925	290	741	245	7.6
	245/35R19 XL	93	Y	8 1/2J	650	290	655	248	7.5
	245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.5
	245/45R19	98	Y	8J	750	250	703	243	7.6
	265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.6
20	215/30R20 XL	82	W	7 1/2J	475	290	638	218	7.5
	225/30R20 XL	85	W	8J	515	290	644	230	7.5
	225/35R20 XL	90	Y	8J	600	290	666	230	7.6
	235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.6
	245/35R20 XL	95	Y	8 1/2J	690	290	680	248	7.6
	245/45R20	99	W	8J	775	250	728	243	6.8
22	265/40R22 XL	106	V	9 1/2J	950	290	771	271	7.5
	285/40R22 XL	110	V	10J	1060	290	787	290	7.5



GREEN-Max HP⁰¹⁰

HP Tire with Good Handling Performance and Low Noise

1. Good straight driving stability;
2. Comfortable and quiet ride;
3. Low rolling resistance for better fuel efficiency;
4. Enhanced wet grip to effectively reduce risk of hydroplaning.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	*165/60R14	75	H	5J	387	250	554	170	7.3
	*165/80R14	85	S	4 1/2J	515	240	620	165	7.3
	*175/65R14	82	H	5J	475	250	584	177	7.3
	*175/65R14 XL	86	H	5J	530	290	584	177	7.3
	185/55R14	80	H	6J	450	250	560	194	7.7
	185/60R14	82	H	5 1/2J	475	250	578	189	7.7
	185/65R14	86	H	5 1/2J	530	250	596	189	7.8
	195/65R14	89	H	6J	580	250	610	201	7.2
15	*165/50R15	73	V	5J	365	250	547	170	7.4
	*165/55R15	75	V	5J	387	250	563	170	7.3
	*165/60R15	77	H	5J	412	250	579	170	7.3
	*175/60R15	81	H	5J	462	250	591	177	7.3
	*175/65R15	84	H	5J	500	250	609	177	7.3
	185/55R15	82	V	6J	475	250	585	194	7.7
	185/60R15	84	H	5 1/2J	500	250	603	189	7.7
	185/60R15 XL	88	H	5 1/2J	560	290	603	189	7.7
	185/65R15	88	H	5 1/2J	560	250	621	189	7.8
	195/50R15	82	V	6J	475	250	577	201	7.8
	195/55R15	85	V	6J	515	250	595	201	7.8
	195/60R15	88	H/V	6J	560	250	615	201	6.0
	195/65R15	91	H/V	6J	615	250	635	201	7.8
	195/65R15 WW	91	H	6J	615	250	635	201	7.8
	205/55R15	88	V	6 1/2J	560	250	607	214	7.2
	205/60R15	91	H/V	6J	615	250	627	209	7.8
	205/65R15	94	H/V	6J	670	250	647	209	7.8
	215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.8

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	*165/45R16 XL	74	V	5 1/2J	375	290	554	165	7.4
	185/50R16	81	H	6J	462	250	592	194	7.5
	195/50R16 XL	88	V	6J	560	290	602	201	7.5
	195/55R16	87	V	6J	545	250	620	201	7.5
	195/55R16 XL	91	H	6J	615	290	620	201	7.7
	195/60R16	89	H	6J	580	250	640	201	7.8
	205/50R16	87	V	6 1/2J	545	250	612	214	7.8
	205/55R16	91	H/V	6 1/2J	615	250	632	214	7.8
	205/60R16	92	H/V	6J	630	250	652	209	7.8
	205/65R16	95	H	6J	690	250	672	209	7.8
	215/60R16	95	H	6 1/2J	690	250	664	221	7.8
	215/60R16 XL	99	H/V	6 1/2J	775	290	664	221	7.7
	215/65R16	98	H	6 1/2J	750	250	686	221	7.7
	225/65R16	100	H	6 1/2J	800	250	698	228	8.6
	225/70R16	103	H	6 1/2J	875	250	722	228	8.6
	235/65R16	103	H	7J	875	250	712	240	8.2
	255/65R16	109	H	7 1/2J	1030	250	738	260	8.1
	17	*165/40R17 XL	75	V	6J	387	290	564	170
205/55R17 XL		95	V	6 1/2J	690	290	658	214	7.5
215/60R17		96	H	6 1/2J	710	250	690	221	7.8
225/45R17 XL		94	H	7 1/2J	670	290	634	225	7.7
225/65R17		102	H	6 1/2J	850	250	724	228	8.6

*Three Grooves



GREEN-Max EcoTouring

Eco-friendly Tire

1. Low resistance;
2. Low noise;
3. Excellent wet performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	145/70R12	69	S	4.50B	325	250	509	150	6.2
	155/70R12	73	S	4.50B	365	250	523	157	7.5
13	145/70R13	71	T	4.50B	345	250	534	150	7.3
	145/80R13	75	T	4.00B	387	240	562	145	7.1
	155/65R13	73	T	4.50B	365	250	532	157	7.3
	155/70R13	75	T	4.50B	387	250	548	157	7.3
	155/80R13	79	T	4.50B	435	240	578	157	7.3
	165/65R13	77	T	5.00B	412	250	544	170	6.0
	165/70R13	79	T	5.00B	435	250	562	170	6.0
	175/60R13	77	H	5.00B	412	250	540	177	7.3
	175/60R13	77	T	5.00B	412	250	540	177	7.3
	175/65R13	80	T	5.00B	450	250	558	177	7.3
	175/70R13	82	T	5.00B	475	250	576	177	6.0
	185/70R13	86	T	5.50B	530	250	590	189	7.3
	14	155/65R14	75	T	4 1/2J	387	250	558	157
165/65R14		79	T	5J	435	250	570	170	7.3
165/70R14		81	T	5J	462	250	588	170	7.3
175/65R14		82	T	5J	475	250	584	177	6.0
175/65R14 XL		86	T	5J	530	290	584	177	6.0
175/70R14		84	T	5J	500	250	602	177	7.3
175/70R14 XL		88	T	5J	560	290	602	177	7.3
185/65R14		86	T	5 1/2J	530	250	596	189	7.5
185/70R14		88	T	5 1/2J	560	250	616	189	7.7
195/70R14		91	T	6J	615	250	630	201	7.3
*205/60R14	88	H	6J	560	250	602	209	7.7	
15	185/65R15	88	T	5 1/2J	560	250	621	189	7.7
	185/65R15 XL	92	T	5 1/2J	630	290	621	189	7.7
	195/65R15	91	T	6J	615	250	635	201	6.0
	195/65R15 XL	95	T	6J	690	290	635	201	6.0
	205/70R15	96	T	6J	710	250	669	209	7.7
	235/75R15	105	T	6 1/2J	925	250	733	235	7.9

*Four Grooves



CROSSWIND R791

High Wear Resistance and Good Handling

1. High wear resistance;
2. Quiet and comfort;
3. Specially designed for taxis.

Taxi Tire

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	145/80R12	74	T	4J	375	240	537	145	7.2
13	165/80R13	83	S	4.50B	485	240	594	165	7.7
14	175/70R14 XL	88	H	5J	560	250	602	177	7.7
	185/60R14	82	H	5 1/2J	475	250	578	189	8.3
	195/60R14	86	H	6J	530	250	590	201	8.5
15	175/50R15	75	H	5 1/2J	387	250	557	182	7.2
	185/60R15	84	H	5 1/2J	500	250	603	189	8.3
	195/60R15	88	H	6J	560	250	615	201	8.3
	195/65R15	91	H	6J	615	250	635	201	8.3
16	205/55R16	91	H	6 1/2J	615	250	632	214	8.1



LL700

Good drainage low noise

1. Excellent wet handling performance;
2. Good driving stability;
3. Improved wear resistance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	S	4.50B	387	250	548	157	8.1
	175/70R13	82	T	5.00B	475	250	576	177	6.0
	185/70R13	86	T	5.50B	530	250	590	189	6.0
14	175/70R14	84	T	5J	500	250	602	177	6.0
	185/70R14	88	T	5 1/2J	560	250	616	189	6.0
	195/70R14	91	T	6J	615	250	630	201	6.0
	205/70R14 XL	95	T	6J	690	290	644	209	8.0
	215/70R14	96	T	6 1/2J	710	250	658	221	8.0
15	205/70R15	96	H	6J	710	250	669	209	8.0
	215/70R15	98	T	6 1/2J	750	250	683	221	8.0



CrossWind

Ultra High Performance

1. Directional tread pattern design;
2. Excellent handling performance;
3. Low noise.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195/50R15	82	V	6J	475	250	577	201	7.5
	195/55R15	85	H	6J	515	250	595	201	7.5
16	195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.6
	205/45R16 XL	87	W	7J	545	290	590	206	7.6
	205/50R16	87	V/W	6 1/2J	545	250	612	214	7.6
	205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.6
	215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.6
	215/55R16 XL	97	W	7J	730	290	642	226	7.6
17	225/50R16 XL	96	V	7J	710	290	632	233	7.6
	205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.6
	205/45R17 XL	88	W	7J	560	290	616	206	7.6
	205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.6
	215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.6
	215/45R17 XL	91	W	7J	615	290	626	213	7.6
	215/50R17	91	V	7J	615	250	648	226	7.5
	215/50R17 XL	95	W	7J	690	290	648	226	7.5
	215/55R17 XL	98	W	7J	750	290	668	226	7.6
	225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.6
	225/50R17 XL	98	W	7J	750	290	658	233	7.6
	225/55R17 XL	101	W	7J	825	290	680	233	7.5
	235/45R17 XL	97	W	8J	730	290	644	236	7.6
	235/55R17 XL	103	W	7 1/2J	875	290	690	245	7.5
18	245/40R17 XL	95	W	8 1/2J	690	290	628	248	7.5
	245/45R17 XL	99	W	8J	775	290	652	243	7.6
	215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.6
	225/40R18 XL	92	W	8J	630	290	637	230	7.6

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
18	225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.6
	235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.6
	235/45R18	94	W	8J	670	250	669	236	7.5
	235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.6
	245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.6
	245/45R18 XL	100	W	8J	800	290	677	243	7.6
	255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.6
	265/35R18 XL	97	H	9 1/2J	730	290	643	271	7.5
	225/50R18	95	V	7J	690	250	683	233	7.6
	265/60R18 XL	114	H	8J	1180	290	775	272	8.0
19	225/35R19 XL	88	W	8J	560	290	641	230	7.6
	235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.6
	235/40R19 XL	96	V	8 1/2J	710	290	671	241	7.0
	235/55R19 XL	105	W	7 1/2J	925	290	741	245	7.5
	245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.5
	255/35R19 XL	96	W	9J	710	290	661	260	7.5
20	265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.6
	225/35R20 XL	90	W	8J	600	290	666	230	7.5
	235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.6
	235/45R20 XL	100	W	8J	800	290	720	236	7.6
	245/35R20 XL	95	W	8 1/2J	690	290	680	248	7.5
	245/45R20 XL	103	W	8J	875	290	728	243	7.5
	255/35R20	97	W	9J	730	290	686	260	7.6
	265/45R20	104	W	9J	900	250	746	266	7.6
	265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.0
	275/40R20 XL	106	W	9 1/2J	950	290	728	278	8.1
	275/45R20 XL	110	V	9J	1060	290	756	273	8.1
	275/50R20 XL	113	W	8 1/2J	1150	290	784	284	8.3
	275/55R20 XL	117	W	8 1/2J	1285	290	810	284	8.3
	245/50R20	102	V	7 1/2J	850	250	754	253	7.6
22	235/30R22 XL	90	W	8 1/2J	600	290	701	242	7.8
	245/30R22 XL	92	W	8 1/2J	630	290	707	248	7.8
	255/30R22 XL	95	V	9J	730	290	713	260	7.8
	265/35R22 XL	102	W	9 1/2J	850	290	745	271	7.8
	305/40R22 XL	114	V	11J	1180	290	803	313	8.1
	305/45R22 XL	118	V	10J	1320	290	833	303	8.1
24	305/35R24 XL	112	V	11J	1120	290	824	313	8.1
26	305/30R26 XL	109	W	11J	1030	290	844	313	8.1



CrossWind HP⁰¹⁰

HP Tire with Excellent Handling Performance,
High mileage and Low noise

1. Good straight driving stability;
2. Comfortable and quiet ride;
3. Excellent handling performance;
4. Enhanced wet grip to effectively reduce risk of hydroplaning.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	*155/70R12 WL	73	T	4.50B	365	250	523	157	6.2
	*165/70R12 WL	77	T	5.00B	412	250	537	170	6.2
14	*165/55R14	72	V	5J	355	250	538	170	7.4
	165/55R14	72	V	5J	355	250	578	189	7.7
	*175/65R14	72	V	5J	355	250	538	170	7.4
	175/65R14	82	H	5J	475	250	578	189	7.5
	*175/70R14	84	T	5J	500	250	602	177	7.3
	175/70R14	84	T	5J	500	250	596	189	7.5
	185/70R14 XL	92	H	5 1/2J	630	250	616	189	7.7
	195/70R14	91	H	6J	615	250	630	201	7.7
15	195/70R14 WL	91	H	6J	615	250	630	201	7.7
	*175/65R15	84	H	5J	500	250	609	177	7.3
	175/65R15	84	H	5J	500	250	616	189	7.7
	185/60R15	84	H	5 1/2J	500	250	603	189	7.7
	185/65R15	88	H	5 1/2J	560	250	621	189	7.7
	195/50R15	82	V	6J	475	250	577	201	7.7
	195/55R15	85	V	6J	515	250	595	201	7.7
	195/60R15	88	H	6J	560	250	615	201	7.7
	195/65R15	91	H	6J	615	250	635	201	7.7
	205/60R15	91	H	6J	615	250	627	209	7.7
	205/65R15	94	H	6J	670	250	647	209	7.7
	215/60R15	94	H	6 1/2J	670	250	639	221	7.7
	215/65R15	96	H	6 1/2J	710	250	661	221	7.7
	215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.7
	255/70R15	108	S	7 1/2J	1000	250	739	260	9.1

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	185/55R16	83	V	6J	487	250	610	194	7.7
	195/50R16	84	V	6J	500	250	602	201	7.5
	195/60R16 XL	93	H	6J	650	290	640	201	7.2
	205/55R16	91	H	6 1/2J	615	250	632	214	7.7
	205/60R16	92	H	6J	630	250	652	209	7.7
	205/60R16	92	V	6J	630	250	652	209	7.7
	205/60R16 XL	96	H	6J	710	290	652	209	7.7
	215/55R16	93	H	7J	650	250	642	226	7.7
	215/55R16 XL	97	H	7J	730	290	642	226	7.7
	215/60R16	95	H	6 1/2J	690	250	664	221	7.7
	215/65R16	98	H	6 1/2J	750	250	686	221	7.7
	225/55R16	95	V	7J	690	250	654	233	7.7
	225/60R16	98	H	6 1/2J	750	250	676	228	8.5
	225/65R16	100	H	6 1/2J	800	250	698	228	8.5
	225/70R16	103	H	6 1/2J	875	250	722	228	8.5
	17	235/60R16	100	H	7J	800	250	688	240
235/65R16		103	H	7J	875	250	712	240	8.5
215/50R17		91	V	7J	615	250	648	226	7.7
215/55R17		94	V	7J	670	250	668	226	7.7
215/60R17		96	H	6 1/2J	710	250	690	221	7.7
215/65R17		99	H	6 1/2J	775	250	712	221	7.7
225/50R17		94	V	7J	670	250	658	233	7.7
225/55R17		97	H	7J	730	250	680	233	8.5
225/60R17		99	H	6 1/2J	775	250	702	228	8.5
225/65R17		102	H	6 1/2J	850	250	724	228	8.5
235/55R17		99	H	7 1/2J	775	250	690	245	8.5
235/60R17		102	H	7J	850	250	714	240	8.5
18	235/65R17	104	H	7J	900	250	738	240	8.5
	235/65R18	106	H	7J	950	250	763	240	8.5
	225/55R18	98	H	7J	750	250	705	233	8.5

*Three Grooves



CrossWind EcoTouring

Super Wear Resistance

1. Ultra mileage tire;
2. Low noise;
3. Improved water evacuation.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	*175/70R12	80	H	5.00B	450	250	551	177	7.7
13	*165/60R13	73	T	5.00B	365	250	528	528	7.7
	*175/70R13	82	T	5.00B	475	250	576	177	7.7
	185/70R13	86	T	5.50B	530	250	590	189	7.7
	*175/75R13	84	T	5J	500	250	592	177	6.0
14	*175/65R14	82	T	5J	475	250	584	177	7.7
	*175/75R14	86	T	5J	530	250	618	177	6.0
	185/65R14	86	T	5 1/2J	530	250	596	189	7.7
	185/70R14	88	T	5 1/2J	560	250	616	189	7.7
15	195/70R14	91	T	6J	615	250	630	201	7.7
	185/65R15	88	T	5 1/2J	560	250	621	189	7.7
	195/50R15	82	H	6J	475	250	577	201	8.5
	195/60R15	88	H	6J	560	250	615	201	8.5
	195/65R15	91	H	6J	615	250	635	201	8.5
	205/60R15	91	H	6J	615	250	627	209	8.5
	205/65R15	94	H	6J	670	250	647	209	8.5
	205/70R15	96	T	6J	710	250	669	209	8.5
	205/75R15	97	S	5 1/2J	730	250	689	203	8.5
	215/70R15	98	T	6 1/2J	750	250	683	221	8.5
	215/75R15	100	S	6J	800	250	703	216	8.5
	225/70R15	100	T	6 1/2J	800	250	697	228	8.7
225/75R15	102	S	6J	850	250	719	223	8.7	
235/75R15	105	S	6 1/2J	925	250	733	235	8.7	
16	205/55R16	91	H	6 1/2J	615	250	632	214	8.7
	205/60R16	92	H	6J	630	250	652	209	8.7
	205/65R16	95	H	6J	690	250	672	209	8.5
	215/60R16	95	H	6 1/2J	690	250	664	221	8.7
	215/65R16	98	H	6 1/2J	750	250	686	221	8.7
	215/70R16	100	T	6 1/2J	800	250	708	221	8.7
	225/60R16	98	H	6 1/2J	750	250	676	228	8.7
	225/65R16	100	H	6 1/2J	800	250	698	228	8.7
	225/70R16 XL	107	H	6 1/2J	975	290	722	228	8.7
	235/70R16	106	H	7J	950	250	736	240	8.7
	245/70R16	107	H	7J	975	250	750	248	8.7
	245/75R16	111	H	7J	1090	250	774	248	8.7
	255/70R16	111	S	7 1/2J	1090	250	764	260	8.7
265/70R16	112	S	8J	1120	250	778	272	8.7	
265/75R16	116	H	7 1/2J	1250	250	804	267	8.7	

*Three Grooves



SPORT G5 New

High handling performance

1. Superior grip and handling performance;
2. Excellent stability.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	205/45R16 XL	87	V	7J	545	290	590	206	6.0
	205/50R16 XL	91	V	6 1/2J	615	290	612	214	6.0
	205/55R16	91	V	6 1/2J	615	250	632	214	6.0
17	205/40R17 XL	84	W	7 1/2J	500	290	596	212	6.0
	205/45R17 XL	88	W	7J	560	290	616	206	6.0
	215/45R17	87	W	7J	545	250	626	213	6.0





L688

Ultra High Performance Tire
Strong grip with good steering performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	205/50ZR16 XL	91	W	6 1/2J	615	290	612	214	7.7
	205/55ZR16 XL	94	W	6 1/2J	670	290	632	214	7.7
	215/55ZR16 XL	97	W	7J	730	290	642	226	7.7
	225/50ZR16	92	W	7J	630	250	632	233	7.7
17	205/40ZR17 XL	84	W	7 1/2J	500	290	596	212	7.7
	205/50ZR17 XL	93	W	6 1/2J	650	290	638	214	7.7
	215/40ZR17 XL	87	W	7 1/2J	545	290	604	218	7.7
	215/45ZR17 XL	91	W	7J	615	290	626	213	7.7
	225/45ZR17 XL	94	W	7 1/2J	670	290	634	225	7.7
	235/45R17 XL	97	W	8J	730	290	644	236	7.7
18	245/45ZR17	95	W	8J	690	250	652	243	7.7
	215/35ZR18 XL	84	Y	7 1/2J	500	290	607	218	7.7
	215/40ZR18 XL	89	W	7 1/2J	580	290	629	218	7.7
	225/40ZR18 XL	92	W	8J	630	290	637	230	7.7
	235/40ZR18 XL	95	W	8 1/2J	690	290	645	241	7.7
	235/50ZR18	97	W	7 1/2J	730	250	693	245	7.7
	245/40ZR18 XL	97	W	8 1/2J	730	290	653	248	7.7
	255/45ZR18 XL	103	W	8 1/2J	875	290	687	255	7.7
	265/35ZR18 XL	97	Y	9 1/2J	730	290	643	271	7.7
245/45ZR18 XL	100	W	8J	800	290	677	243	7.7	
19	245/35ZR19 XL	93	Y	8 1/2J	650	290	655	248	7.7
20	225/30ZR20 XL	85	Y	8J	515	290	644	230	7.7
	225/35ZR20 XL	90	Y	8J	600	290	666	230	7.7
	245/35ZR20 XL	95	Y	8 1/2J	690	290	680	248	7.7
	255/35ZR20 XL	97	Y	9J	730	290	686	260	7.7



L689

Ultra High Performance Tire

1. Excellent high speed performance and strong grip;
2. Solid shoulder design to provide superior steering performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
20	275/30R20 XL	97	W	9 1/2J	730	290	674	278	8.3
	275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.3
	275/45R20 XL	110	V	9J	1060	290	756	273	8.3
	275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.3
	285/30R20 XL	99	W	10J	775	290	680	290	8.3
	285/50R20 XL	116	V	9J	1250	290	794	297	8.3
22	255/30R22 XL	95	W	9J	690	290	713	260	8.3
	265/35R22 XL	102	V	9 1/2J	850	290	745	271	8.3
	305/40R22 XL	114	V	11J	1180	290	803	313	8.3
	305/45R22 XL	118	V	10J	1320	290	833	303	8.3
24	305/35R24 XL	112	V	11J	1120	290	824	313	8.3
	255/30R24 XL	97	W	9J	730	290	764	260	8.3
	275/25R24 XL	95	W	10J	690	290	748	283	8.3
26	295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.3
	305/30R26 XL	109	W	11J	1030	290	844	313	8.3



SUV Tire



GREEN-Max 4x4 HP

New

SUV tires for urban highway use, with good handling and low noise

1. Excellent handling performance.
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	H	6J	710	250	669	209	8.8
	215/65R16 XL	102	H	6 1/2J	850	290	686	221	8.8
16	215/70R16	100	H	6 1/2J	800	250	708	221	8.8
	225/65R16	100	H	6 1/2J	800	250	698	228	8.8
	225/75R16	104	H	6J	900	250	744	223	8.8
	235/60R16	100	H	7J	800	250	688	240	8.8
	235/70R16	106	H	7J	950	250	736	240	8.8
	245/70R16 XL	111	H	7J	1090	290	750	248	8.8
	265/70R16	112	H	8J	1120	250	778	272	8.8
	275/70R16	114	H	8J	1180	250	792	279	8.8
17	215/60R17	96	H	6 1/2J	710	250	690	221	8.8
	215/65R17 XL	103	V	6 1/2J	875	290	712	221	7.5
	225/55R17 XL	101	V	7J	825	290	680	233	8.5
	225/65R17	102	H	6 1/2J	850	250	724	228	8.8
	225/60R17	99	V	6 1/2J	775	250	702	228	7.7
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.5
	235/60R17 XL	106	V	7J	950	290	714	240	8.8
	235/65R17 XL	108	V	7J	1000	290	738	240	8.8
	245/65R17 XL	111	H	7J	1090	290	750	248	8.8
	255/60R17	106	H	7 1/2J	950	250	738	260	8.8
	255/65R17	110	H	7 1/2J	1060	250	764	260	8.8
18	265/65R17	112	H	8J	1120	250	776	272	8.8
	275/55R17	109	V	8 1/2J	1030	250	734	284	8.8
	215/55R18 XL	99	V	7J	775	290	693	226	7.7
	215/55R18	95	V	7J	690	250	693	226	8.2
	225/55R18	98	V	7J	750	250	705	233	7.7
	225/60R18	100	H	6 1/2J	800	250	727	228	8.8
	235/50R18	97	V	7 1/2J	730	250	693	245	8.1
	235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.5
	235/60R18 XL	107	V	7J	975	290	739	240	8.8
	255/55R18 XL	109	V/W	8J	1030	290	737	265	8.5
	255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.8
19	265/60R18	110	H	8J	1060	250	775	272	7.5
	275/60R18	113	H	8J	1150	250	787	279	8.8
	225/55R19	99	V	7J	775	250	731	233	8.0
	255/50R19 XL	107	W	8J	975	290	739	265	8.1
	255/55R19 XL	111	V	8J	1090	290	763	265	8.5
20	265/50R19 XL	110	W	8 1/2J	1060	290	749	277	7.5
	265/50R20 XL	111	V	8 1/2J	1090	290	774	277	7.5
	275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.1
	275/45R20 XL	110	V	9J	1060	290	756	273	8.1
21	315/35R20 XL	110	W	11J	1060	290	728	320	8.0
	295/35R21 XL	107	W	10 1/2J	975	290	739	301	8.0
22	275/40R22 XL	107	W	9 1/2J	975	290	779	278	8.0
	285/35R22 XL	106	V	10J	950	290	759	290	8.1



CROSSWIND 4x4 HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	H	6J	710	250	669	209	8.5
	205/70R16	97	V	6J	730	250	694	209	8.7
	215/65R16 XL	102	H	6 1/2J	850	290	686	221	8.5
	215/70R16	100	H	6 1/2J	800	250	708	221	8.5
16	225/65R16	100	H	6 1/2J	800	250	698	228	8.5
	225/75R16	104	H	6J	900	250	744	223	8.5
	235/60R16	100	H	7J	800	250	688	240	8.5
	235/70R16	106	H	7J	950	250	736	240	8.5
	245/70R16 XL	111	H	7J	1090	290	750	248	8.5
	265/70R16	112	H	8J	1120	250	778	272	8.5
	275/70R16	114	H	8J	1180	250	792	279	8.5
	215/60R17	96	H	6 1/2J	710	250	690	221	8.5
	225/55R17 XL	101	V	7J	825	290	680	233	8.2
225/65R17	102	H	6 1/2J	850	250	724	228	8.5	
235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.2	
235/60R17 XL	106	V	7J	950	290	714	240	8.5	
235/65R17 XL	108	V	7J	1000	290	738	240	8.5	
245/65R17 XL	111	H	7J	1090	290	750	248	8.5	
255/60R17	106	H	7 1/2J	950	250	738	260	8.5	
255/65R17	110	H	7 1/2J	1060	250	764	260	8.5	
265/65R17	112	H	8J	1120	250	776	272	8.5	
275/55R17	109	V	8 1/2J	1030	250	734	284	8.2	
18	225/55R18	98	V	7J	750	250	705	233	8.7
	225/60R18	100	H	6 1/2J	800	250	727	228	8.5
	235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.2
	235/60R18 XL	107	V	7J	975	290	739	240	8.5
	235/65R18	106	H	7J	950	250	763	240	8.5
	245/60R18	105	V	7J	925	250	751	248	8.5
	255/55R18 XL	109	V	8J	1030	290	737	265	8.2
	255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.5
	255/65R18	111	H	7 1/2J	1090	250	789	260	8.7
	265/60R18	110	H	8J	1060	250	775	272	8.5
	265/65R18	114	H	8J	1180	250	801	272	8.7
	265/70R18	116	T	8J	1250	250	829	272	8.7
	275/60R18	113	H	8J	1150	250	787	279	8.5
	275/65R18	116	H	8J	1250	250	815	279	8.7
19	235/50R19 XL	103	V	7 1/2J	875	290	719	245	8.0
	235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.2
	245/55R19	103	V	7 1/2J	875	250	753	253	8.7
	255/50R19 XL	107	W	8J	975	290	739	265	8.7
	255/55R19 XL	111	V	8J	1090	290	763	265	8.2
	255/60R19	109	H	7 1/2J	1030	250	789	260	8.7
20	235/55R20 XL	105	V	7 1/2J	925	290	766	245	8.0
	245/50R20	102	V	7 1/2J	850	250	754	253	8.7
	255/50R20 XL	109	V	8J	1030	290	764	265	8.7
	265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.7
	275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.7



CROSSWIND A/T¹⁰⁰

Low noise all-weather tire

1. All Weather Capability
2. Comfortable Quiet Ride
3. Excellent Snow and Wet Braking
4. Off-Road Traction

New

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	/	96	T	6J	710	250	669	209	8.7
	235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	8.7
	255/70R15	/	108	T	7 1/2J	1000	250	739	260	8.7
	265/70R15	/	112	T	8J	1120	250	753	272	9.2
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	11.0
	LT215/75R15	6PR	100/97	S	6J	D730 / S800	350	703	216	9.5
	LT225/75R15	6PR	102/99	S	6J	D775 / S850	350	719	223	9.5
	LT235/75R15	6PR	104/101	S	6 1/2J	D775 / S850	350	733	235	9.5
	16	245/70R16 XL	/	111	T	7J	D775 / S850	290	750	248
205R16LT		8PR	110/108	Q	6J	D775 / S850	450	734	208	9.5
LT225/75R16		10PR	115/112	Q	6J	D775 / S850	550	744	223	9.5
17	245/65R17 XL	/	111	T	7J	1090	290	750	248	8.7
	265/65R17	/	112	T	8J	1120	250	776	272	9.2





CROSSWIND A/T

All Terrain Tire

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/70R14 XL	/	88	H	5J	560	290	602	177	8.2
	175/75R14	/	86	T	5J	530	250	618	177	8.2
	175/80R14	/	88	T	5J	560	240	636	177	8.2
15	205/60R15	/	91	H	6J	615	250	627	209	8.8
	205/65R15	/	94	H	6J	670	250	647	209	8.8
	205/70R15	/	96	T	6J	710	250	669	209	8.8
	225/75R15	/	102	S	6J	850	250	719	223	9.2
	235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.2
	255/70R15	/	108	T	7 1/2J	1000	250	739	260	10.3
	265/70R15	/	112	T	8J	1120	250	753	272	11.0
	265/70R15 OWL	/	112	S	8J	1120	250	753	272	11.0
	265/70R15 OWL	/	112	Q	8J	1120	250	753	272	11.0
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.5
	31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	350	775	268	12.5
	LT215/75R15	6PR	100/97	S	6J	D730 / S800	350	703	216	10.8
	LT225/75R15	6PR	102/99	S	6J	D775 / 850	350	719	223	11.5
	LT235/75R15	6PR	104/101	R/S	6 1/2J	D825 / S900	350	733	235	11.5
	LT235/75R15 OWL	6PR	104/101	Q	6 1/2J	D825 / S900	350	733	235	11.5
	LT235/75R15	10PR	116/113	S	6 1/2J	D1150 /S1250	550	733	235	11.5
16	205/60R16	/	92	H	6J	630	250	652	209	8.8
	215/65R16	/	98	T	6 1/2J	750	250	686	221	8.2
	215/70R16	/	100	T	6 1/2J	800	250	708	221	9.2
	225/70R16	/	103	T	6 1/2J	875	250	722	228	9.2
	225/70R16 XL	/	107	T	6 1/2J	975	290	722	228	9.2
	235/70R16	/	106	T/Q	7J	950	250	736	240	9.2
	245/70R16 XL	/	111	T	7J	1090	290	750	248	10.3
	245/75R16	/	111	T	7J	1090	250	774	248	10.3
	255/70R16	/	111	S	7 1/2J	1090	250	764	260	10.3
	265/70R16 OWL	/	112	Q/T	8J	1120	250	778	272	11.0
	265/75R16 OWL	/	116	T/Q	7 1/2J	1250	250	804	267	11.0
	275/70R16 OWL	/	114	S	8J	1180	250	792	279	11.0
	275/70R16 OWL	/	114	Q	8J	1180	250	792	279	11.0
	205R16LT	8PR	110/108	R/Q	6J	D1000 / S1060	450	734	208	10.8
	LT215/85R16	10PR	115/112	Q	6J	D1120 / S1215	550	772	216	10.8

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	LT225/75R16	10PR	115/112	Q	6J	D1120 / S1215	550	744	223	11.5
	LT235/85R16	10PR	120/116	S	6 1/2J	D1250 / S1400	550	806	235	11.5
	LT235/85R16	10PR	120/116	Q	6 1/2J	D1250 / S1400	550	806	235	11.5
	LT245/75R16	10PR	120/116	Q	7J	D1260 / S1380	550	774	248	12.1
	LT265/75R16	10PR	123/120	R	7 1/2J	D1400 / S1550	550	804	267	12.5
	LT285/75R16	10PR	126/123	R	8J	D1550 / S1700	550	834	286	12.5
LT305/70R16	10PR	124/121	R	9J	D1450 / S1600	450	834	311	12.5	
17	225/65R17 XL WL	/	106	T	6 1/2J	2094	290	724	228	8.0
	235/65R17	/	104	T	7J	1984	250	738	240	9.2
	245/65R17 XL	/	111	T	7J	2403	290	750	248	10.3
	245/70R17	/	110	S	7J	2337	250	776	248	10.3
	265/65R17	/	112	T/Q	8J	2469	250	776	272	10.7
	265/70R17	/	115	T	8J	2679	250	804	272	10.7
	275/65R17 XL WL	/	119	T	8J	2998	290	790	279	9.0
	P285/70R17 OWL	/	117	T	8 1/2J	2833	240	832	292	11.0
	P285/70R17 OWL	/	117	Q	8 1/2J	2833	240	832	292	11.0
	LT235/80R17 OWL	10PR	120/117	Q	6 1/2J	D1285 / S1400	550	808	235	11.5
	LT235/80R17	10PR	120/117	R	6 1/2J	D1285 / S1400	550	808	235	11.5
	LT245/70R17	10PR	119/116	Q	7J	D1250 / S1360	550	776	248	12.1
	LT245/75R17	10PR	121/118	R	7J	D1320 / S1450	550	800	248	12.0
	LT245/75R17 OWL	10PR	121/118	Q	7J	D1320 / S1450	550	800	248	12.0
	LT265/70R17 OWL	10PR	121/118	R/Q	8J	D1320 / S1450	550	804	272	12.5
	LT285/70R17 OWL	8PR	121/118	S	8 1/2J	D1320 / S145	450	832	292	12.5
LT285/70R17 OWL	8PR	121/118	Q	8 1/2J	D1320 / S1450	450	832	292	12.5	
LT305/70R17 OWL	8PR	119/116	R	9J	D1250 / S1360	350	860	311	12.5	
LT305/70R17 OWL	8PR	119/116	Q	9J	D1250 / S1360	350	860	311	12.5	
18	235/60R18 XL WL	/	107	T	7J	975	290	739	240	8.0
	255/55R18 XL WL	/	109	T	8J	1030	290	737	265	8.0
	265/60R18	/	110	T	8J	1060	250	775	272	9.2
	265/60R18	/	110	Q	8J	1060	250	775	272	9.2
	265/60R18 WL	/	110	T	8J	1060	250	775	272	9.0
	265/70R18	/	116	T	8J	1250	250	829	272	11.0
	265/70R18 OWL	/	116	Q	8J	1250	250	829	272	11.0
	275/65R18 OWL	/	116	T	8J	1250	250	815	279	11.0
	275/65R18 OWL	/	116	Q	8J	1250	250	815	279	11.0
	285/60R18	/	116	T	8 1/2J	1250	250	799	292	11.0
	285/60R18 WL	/	116	T	8 1/2J	1250	250	799	292	9.0
	285/60R18	/	116	Q	8 1/2J	1250	250	799	292	11.0
	LT265/70R18	10PR	124/121	S	8J	D1450 / S1600	550	829	272	12.5
	LT275/65R18	10PR	123/120	S	8J	D1400 / S1550	550	815	279	12.5
	LT275/70R18	10PR	125/122	S	8J	D1500 / S1650	550	843	279	12.5
20	P275/55R20	/	111	S	8 1/2J	1090	240	810	284	10.7
	P275/60R20	/	114	T	8J	1180	240	838	279	10.7
	LT265/60R20	10PR	121/118	R	8J	D1320 / S1450	550	826	272	12.5
	LT265/60R20 OWL	10PR	121/118	Q	8J	D1320 / S1450	550	826	272	12.5
	LT275/65R20	10PR	126/123	S	8J	D1550 / S1700	550	866	279	12.5
	LT285/55R20	10PR	122/119	S	9J	D1360 / S1500	550	822	297	12.5
	LT285/65R20	10PR	127/124	S	8 1/2J	D1600 / S1750	550	878	292	12.5
35X12.50R20LT	10PR	121	Q	10J	1450	450	877	318	12.5	



CROSSWIND H/T

SUV Tire for Urban Road Use, with Low Noise and good dry/wet performance.

1. High drainage capability;
2. High comfort and low noise;
3. Excellent handling performance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.7
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	11.0
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	775	268	11.0
16	215/70R16	/	100	T	6 1/2J	800	250	708	221	9.0
	225/70R16	/	103	T	6 1/2J	875	250	722	228	9.5
	225/70R16 XL	/	107	T	6 1/2J	975	290	722	228	9.5
	235/70R16	/	106	T	7J	950	250	736	240	9.5
	245/70R16	/	107	T	7J	975	250	750	248	9.7
	245/75R16	/	111	T	7J	1090	250	774	248	9.7
	255/70R16	/	111	T	7 1/2J	1090	250	764	260	9.7
	265/70R16	/	112	T	8J	1120	250	778	272	9.5
	265/75R16	/	116	T	7 1/2J	1250	250	804	267	9.7
	LT215/85R16	10PR	115/112	S	6J	D1120 / S1215	550	772	216	11.0
	LT215/85R16	10PR	115/112	Q	6J	D1120 / S1215	550	772	216	11.0
	LT225/75R16	10PR	115/112	S	6J	D1120 / S1215	550	744	223	11.0
	LT225/75R16	10PR	115/112	Q	6J	D1120 / S1215	550	744	223	11.0
	LT235/85R16	10PR	120/116	R	6 1/2J	D1250 / S1400	550	806	235	11.0
	LT235/85R16	10PR	120/116	Q	6 1/2J	D1250 / S1400	550	806	235	11.0
	LT245/75R16	10PR	120/116	R	7J	D1250 / S1400	550	774	248	11.0
	LT245/75R16	10PR	120/116	Q	7J	D1250 / S1400	550	774	248	11.0
	LT265/75R16	10PR	123/120	R	7 1/2J	D1400 / S1550	550	804	267	11.0
17	235/65R17	/	104	T	7J	900	250	738	240	9.7
	245/65R17	/	107	T	7J	975	250	750	248	9.7
	245/70R17	/	110	T	7J	1060	250	776	248	9.7
	265/65R17	/	112	T	8J	1120	250	776	272	9.7
	265/70R17	/	115	T	8J	1215	250	804	272	10.5
	275/65R17	/	115	S	8J	1215	250	790	279	9.5
	285/65R17	/	116	S	8 1/2J	1250	250	802	292	9.5
	LT245/75R17	10PR	121/118	R	7J	D1320 / S1450	550	800	248	11.0
	LT245/75R17	10PR	121/118	Q	7J	D1320 / S1450	550	800	248	11.0
	LT265/70R17	10PR	121/118	R	8J	D1320 / S1450	550	804	272	11.0
LT265/70R17	10PR	121/118	Q	8J	D1320 / S1450	550	804	272	11.0	
18	LT265/70R18	10PR	124/121	R	8J	D1450 / S1600	550	829	272	11.0
20	275/55R20 XL	/	117	T	8 1/2J	1285	290	810	284	9.0



CROSSWIND M/T

Mud-Terrain Tire

1. High floatation;
2. Higher load-carrying capacity;
3. Excellent Self-cleaning performance;
4. Aggressive tread pattern and sidewall design.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	205R14C	8PR	109/107	R	6J	D975 / S1030	450	686	208	11.3
15	30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	756	240	13.5
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	781	268	14.5
	33X12.50R15LT	6PR	108	Q	10J	1000	250	832	318	14.5
	LT215/75R15	6PR	100/97	Q	6J	D730 / S800	350	709	216	13.5
	LT235/75R15	6PR	104/101	Q	6 1/2J	D825 / S900	350	739	235	13.5
16	215/80R16	/	107	S	6J	975	290	750	216	11.5
	205R16LT	8PR	110/108	Q	6J	D1000 / S1060	450	740	208	14.5
	LT225/75R16	8PR	110/107	Q	6J	D975 / S1060	450	750	223	13.5
	LT235/70R16	8PR	110/107	Q	7J	D975 / S1060	450	742	240	13.5
	LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 / S1380	550	806	235	13.5
	LT245/75R16	10PR	120/116	Q	7J	D1260 / S1380	550	774	248	13.5
	LT255/70R16	8PR	115/112	Q	7 1/2J	D1120 / S1215	450	770	260	14.5
	LT265/70R16	6PR	110/107	Q	8J	D975 / S1060	350	784	272	14.5
	LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 / S1550	550	810	267	14.5
	LT285/75R16	10PR	126/123	Q	8J	D1550 / S1700	550	840	286	14.5
	LT305/70R16	8PR	118/115	Q	9J	D1215 / S1320	350	840	311	14.5
	LT305/70R16	10PR	124/121	Q	9J	D1450 / S1600	450	834	311	14.5
	LT315/75R16	8PR	121/118	Q	8 1/2J	D1320 / S1450	350	884	313	14.4
LT315/75R16	10PR	127/124	Q	10J	D1600 / S1750	450	884	313	14.4	
17	LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 / S1400	550	808	235	13.5
	LT265/65R17	10PR	120/117	Q	8J	D1285 / S1400	550	782	272	14.2
	LT265/70R17	10PR	121/118	Q	8J	D1320 / S1450	550	810	272	14.5
	LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 / S1450	450	838	292	14.5
	LT285/70R17	10PR	121/118	Q	8 1/2J	D1320 / S1450	550	838	292	14.5
	LT305/70R17	8PR	119/116	Q	9J	D1250 / S1360	350	866	311	14.5
	35X12.50R17LT	10PR	121	Q	10J	1450	450	883	318	14.5
18	LT265/60R18	10PR	119/116	Q	8J	D1250 / S1360	550	781	272	14.2
	LT275/70R18	10PR	125/122	Q	8J	D1500 / S1650	550	843	279	14.5
	33X12.50R18LT	10PR	118	Q	10J	1320	450	832	318	14.5
	33X12.50R18LT	12PR	122	Q	10J	1500	550	832	318	14.5
	35X12.50R18LT	10PR	123	Q	10J	1550	450	883	318	14.4
	35X12.50R18LT	12PR	128	Q	10J	1800	550	883	318	14.4
20	LT285/55R20	10PR	122/119	Q	9J	D1360 / S1500	550	822	297	14.5
	LT285/65R20	10PR	127/124	Q	8 1/2J	D1600 / S1750	550	884	292	14.5
	33X12.50R20LT	10PR	114	Q	10J	1180	450	832	318	15.8
	33X12.50R20LT	12PR	119	Q	10J	1360	550	832	318	15.8
	35X12.50R20LT	10PR	121	Q	10J	1450	450	883	318	15.8
	35X12.50R20LT	12PR	125	Q	10J	1650	550	883	318	15.8
	38X15.50R20LT	8PR	125	Q	12J	1650	350	959	395	15.7
22	33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	15.8
	33X12.50R22LT	12PR	114	Q	10J	1180	550	826	318	15.8
	35X12.50R22LT	10PR	117	Q	10J	1285	450	877	318	15.8
	35X12.50R22LT	12PR	121	Q	10J	1450	550	877	318	15.8



LMB3

All Terrain tire

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	215/75R15	100	S	6J	800	250	703	216	9.2
	P215/75R15	100	S	6J	800	250	703	216	9.2
	235/75R15	105	S	6 1/2J	925	250	733	235	9.2
	P235/75R15	105	S	6 1/2J	925	250	733	235	9.2



RADIAL620

All Terrain tire

1. Excellent wet performance;
2. An optimal balance between performance on road and off road.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	H	6J	710	250	669	209	8.0
	265/70R15	112	T	8J	1120	250	753	272	10.2
16	205/80R16 XL	104	T	5 1/2J	900	280	734	203	8.0
	215/65R16	98	H	6 1/2J	750	250	686	221	10.2
	215/70R16	100	T	6 1/2J	800	250	708	221	8.0
	225/75R16 XL	108	R	6J	1000	290	744	223	9.2
	235/70R16	106	T	7J	950	250	736	240	10.2
	245/70R16	107	H	7J	975	250	750	248	10.2
	245/70R16 XL	111	H	7J	1090	290	750	248	10.2
	265/70R16	112	H	8J	1120	250	778	272	10.2
17	235/65R17 XL	108	H	7J	1000	290	738	240	10.2
	275/55R17	109	V	8 1/2J	1030	250	734	284	10.2



Light Truck Tire





GREEN-Max Van

Commercial tire with high grip performance

- 1. Big pattern blocks on the shoulder increase traction and 1. Better grip performance;
- 2. Low rolling resistance for high energy efficiency.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	10PR	88/86	P	3.50B	D530 / S560	550	568	143	7.5
	155R12C	8PR	88/86	N	4.50B	D530 / S560	450	553	157	7.8
13	155R13C	8PR	91/89	P	4 1/2J	D580 / S615	450	578	157	7.8
	165R13C	8PR	94/93	R	4 1/2J	D650 / S670	450	594	165	7.7
	165/70R13LT	8PR	88/85	S	5.00B	D515 / S560	450	562	170	7.3
	175R13C	8PR	97/95	Q	5.00B	D690 / S730	450	610	177	8.1
14	165/70R14C	6PR	89/87	R	5J	D545 / S580	375	588	170	7.8
	175R14LT	8PR	99/97	R	5J	D730 / S775	450	636	177	8.0
	175/70R14C	6PR	95/93	T	5J	D650 / S690	375	602	177	7.8
	175/75R14LT	8PR	94/91	S	5J	D615 / S670	450	618	177	7.5
	185R14C	8PR	102/100	R	5 1/2J	D800 / S850	450	650	188	8.6
	195R14C	8PR	106/104	P	5 1/2J	D900 / S950	450	666	198	8.8
	205R14C	8PR	109/107	R	6J	D975 / S1030	450	686	208	9.1
	215R14C	8PR	112/110	R	6J	D1060 / S1120	450	700	216	9.0
	165/70R14 XL	/	85	H	5J	515	290	588	170	7.7
	185/65R14 XL	/	90	H	5 1/2J	600	290	596	189	7.7
185/70R14 XL	/	92	H	5 1/2J	630	290	616	189	7.7	
15	185R15LT	8PR	103/102	R	5 1/2J	D850 / S875	450	677	189	8.5
	195R15C	8PR	106/104	R	5 1/2J	D900 / S950	450	693	196	9.0
	195/70R15C	8PR	104/102	R	6J	D850 / S900	450	655	201	9.6
	215/70R15C	8PR	109/107	R	6 1/2J	D975 / S1030	450	683	221	9.0
	205/70R15C	8PR	106/104	S	6J	D900 / S950	450	669	209	9.1
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 / S1120	450	697	228	9.6
255/70R15C	6PR	112/110	S	7 1/2J	D1060 / S1120	375	739	260	9.5	
16	185/75R16C	8PR	104/102	R	5J	D850 / S900	475	684	184	9.1
	195/75R16C	8PR	107/105	R	5 1/2J	D925 / S975	475	698	196	9.6
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 / S1060	475	714	203	9.1
	215/70R16C	6PR	108/106	T	6 1/2J	D950 / S1000	375	708	221	9.1
	215/75R16C	8PR	113/111	R	6J	D1090 / S1150	475	728	216	9.6
	225/75R16C	10PR	121/120	R	6J	D1400 / S1450	575	744	223	9.6
	225/75R16LT	12PR	119/116	R	6J	D1250 / S1360	650	744	223	9.6



GREEN-Max Van^{HP}

Commercial tire with high grip performance

- 1. Excellent stability;
- 2. Great grip performance and driving force of turning;
- 3. Low rolling resistance for higher energy efficiency.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/65R14C	6PR	90/88	T	5J	D560 / S600	375	584	177	7.5
15	215/65R15C	6PR	104/102	T	6 1/2J	D850 / S900	375	661	221	9.0
16	195/65R16C	8PR	104/102	R	6J	D850 / S900	475	660	201	8.8
	205/65R16C	8PR	107/105	R	6J	D925 / S975	475	672	209	9.0
	215/60R16C	6PR	103/101	T	6 1/2J	D825 / S875	375	664	221	9.0
	215/65R16C	8PR	109/107	R	6 1/2J	D975 / S1030	475	686	221	9.0
	225/65R16C	8PR	112/110	R	6 1/2J	D1060 / S1120	475	698	228	9.0
	235/65R16C	8PR	115/113	R	7J	D1150 / S1215	475	712	240	9.0



RADIAL620

Suitable For Off-Road Tire

- 1. Excellent wet performance;
- 2. An optimal balance between performance on road and off road.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	185R14C	8PR	102/100	Q	5 1/2J	D800 / S850	450	652	189	8.5
	195R14C	8PR	106/104	Q	5 1/2J	D875 / S925	450	668	196	8.7



R701

Lower Weight Trailer Tire

- 1. Low fuel consumption;
- 2. Budget Tires.

Trailer Tire

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
10	195/55R10C	/	98/96	N	6J	D710 / S750	625	468	201	6.5
12	155/70R12	/	73	S	4.50B	365	250	523	157	6.2
	155/70R12C	/	100/98	N	4 1/2J	D750 / S800	650	523	157	6.5
	155/70R12C	/	104/102	N	4 1/2J	D850 / S900	625	523	157	6.5
	185/60R12C	/	104/101	N	5 1/2J	D825 / S900	650	527	189	6.5
	195/60R12C	/	104/102	N	6J	D850 / S900	650	539	202	6.5
13	135/80R13 XL	/	74	N	3.50B	375	280	546	133	6.2
	145/70R13	/	74	N	4.50J	345	250	534	150	6.2
	145/80R13 XL	/	79	N	4.00B	437	280	562	145	6.2
	155/70R13	/	75	N	4.50B	387	250	548	157	6.2
	155/80R13 XL	/	84	N	4.50B	500	280	578	157	6.2
	165R13C	8PR	94/92	N	4 1/2J	D630 / S670	450	596	167	6.5
	165R13C	8PR	96/94	N	4 1/2J	D670 / S710	450	596	167	6.5
	165/65R13	/	77	N	5.00B	412	250	544	170	6.2
	165/70R13	/	79	N	5.00B	437	250	562	170	6.2
	175/70R13	/	82	N/H	5.00B	475	250	576	177	6.2
	175/70R13 XL	/	86	N	5.00B	530	290	576	177	6.2
	185/70R13	/	86	N	5 1/2J	530	250	590	189	6.2
	185/70R13C	/	106/104	N	5 1/2J	D900 / S950	600	590	189	6.0
	195/50R13C	/	104/101	N	6J	D825 / S900	650	526	201	6.5
	14	165R14LT	6PR	91/90	S	4 1/2J	D600 / S615	350	620	165
165R14LT		8PR	96/95	T	4 1/2J	D690 / S710	450	620	165	7.3
165/55R14		/	72	H	5J	355	250	538	170	6.2
175/65R14		/	82	T/H	5J	475	250	584	177	6.2
185R14C		8PR	102/100	N	5 1/2J	D800 / S850	450	650	188	6.5
185R14C		/	104/102	N	5 1/2J	D850 / S900	500	650	188	6.5
185/60R14		/	82	H	5 1/2J	475	250	578	189	6.2
195R14C		8PR	106/104	N	5J	D900 / S950	450	666	198	6.5
15	195/70R14 XL	/	96	N	6J	710	290	630	201	6.2
	195/55R15	/	85	H	6J	515	250	595	201	6.2
	195/60R15	/	88	H	6J	560	250	615	201	6.2



CROSSWIND R781

Budget Tire

- 1. Low fuel consumption;
- 2. Specially designed for trailer.

Trailer Tire

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	ST175/80R13	6PR	91/87	M	5J	D545 / S615	350	610	177	6.1
14	ST205/75R14	6PR	100/96	M	5 1/2J	D710 / S800	350	664	203	6.1
	ST215/75R14	6PR	102/98	M	6J	D750 / S850	350	678	216	6.1
15	ST205/75R15	8PR	107/102	M	5 1/2J	D850 / S975	450	689	203	6.1
	ST205/75R15	6PR	101/97	M	5 1/2J	D730 / S825	350	689	203	6.1
	ST225/75R15	8PR	113/108	M	6J	D1000 / S1150	450	719	223	6.1
16	ST225/75R15	10PR	117/112	M	6J	D1120 / S1285	550	719	223	6.1
	ST235/80R16	10PR	123/119	M	6 1/2J	D1360 / S1550	550	782	235	6.1
	ST235/85R16	10PR	125/121	M	6 1/2J	D1450 / S1650	550	806	235	6.1



LMC4

Increased mileage with high wear resistance

Excellent wear resistance performance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	6.50R15LT	8PR	101/97	N	5.50F	D730 / S825	460	730	185	9.5
	7.00R15LT	10PR	110/105	L	5.50F	D925 / S1060	560	750	200	9.5
16	6.50R16C	10PR	107/103	N	5.50F	D875 / S975	560	750	185	9.5
	6.50R16C	10PR	108/107	L	5.50F	D975 / S1000	500	750	185	9.5
	6.50R16C	12PR	110/105	M	5.50F	D925 / S1060	670	750	185	9.5
	7.50R16LT	10PR	116/112	L	6.00G	D1120 / S1250	560	805	215	11.0
	7.50R16LT	14PR	122/118	L	6.00G	D1320 / S1500	770	805	215	11.0
	7.50R16LT	12PR	120/116	M	5.50F	D1250 / S1400	670	805	215	11.0



LMC7

All Terrain Tire

Excellent wear resistance performance

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195R15C	8PR	106/104	Q	5 1/2J	D900 / S950	450	690	198	9.5
	195R15C(WHITE)	8PR	106/104	Q	5 1/2J	D900 / S950	450	690	198	9.5



LMC8

Excellent wear resistance performance

High steering and abrasion performance

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	195R14C	8PR	106/104	P	5 1/2J	D900 / S950	450	668	196	9.0
	195R14C (WHITE)	8PR	106/104	P	5 1/2J	D900 / S950	450	668	196	9.0
	205R14C	8PR	109/107	R	6 J	D975 / S1030	450	684	208	9.0
15	205R15C	8PR	110/108	R	6 J	D1000 / S1060	450	711	209	9.0
	205R15C (WHITE)	8PR	110/108	R	6 J	D1000 / S1060	450	711	209	9.0



LMC5

Increased mileage with high wear resistance

1. Freight vehicles;
2. High mileage.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	185R14C	8PR	102/100	Q/N	5 1/2J	D800 / S850	450	652	189	10.0
	195R14LT	8PR	106/104	P	5 1/2J	D900 / S950	450	668	196	10.0



LMB3

All Terrain tire

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195/70R15C	8PR	99/96	R	6J	D710 / S775	450	655	201	10.0
	195/70R15C(WHITE)	8PR	104/102	R	6J	D850 / S900	450	655	201	10.0



RADIAL655

Excellent steering and high wear resistance

1. Good drainage performance and stability;
2. Good wear resistance;
3. Excellent steering performance..

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	8PR	83/81	N	3.50B	D462 / S487	450	568	143	7.0



LL776

Budget Tire with high wear resistance

1. Good steering performance;
2. High wear resistance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	8PR	83/81	P	3.50B	D462 / S487	400	568	143	7.6
	5.00R12LT	10PR	88/86	P	3.50B	D530 / S560	500	568	143	7.6
	5.50R12LT	10PR	92/90	P	3.50B	D600 / S630	560	595	160	7.5
13	5.50R13LT	12PR	97/95	P	4.00B	D690 / S730	625	620	160	7.8



RADIAL R751

High Mileage Tire

1. High wear resistance;
2. Self-cleaning properties;
3. All Season Tire for light trucks.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	6.00R13LT	10PR	98/93	N	4.50B	D650 / S750	550	655	170	10.0
14	6.00R14LT	10PR	100/96	N	4 1/2J	D710 / S800	550	680	170	10.0
15	6.00R15LT	8PR	97/92	L	4.50E	D630 / S730	460	705	170	10.0
16	7.00R16LT	12PR	115/110	M/N	5.50F	D1060 / S1215	670	775	200	10.5



RADIAL616

Increased mileage with high wear resistance

1. Excellent traction and handling performance
2. Excellent wear resistance performance
3. All Terrain Tire

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	215R15C	8PR	111/109	T	6J	D1030 / S1090	450	725	216	10.0
	30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	750	240	11.0
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	775	268	11.0



LL850

Designed For Snow And Ice Road Exhibits Wear Resistance

1. An all position heavy duty light truck tire suitable for commercial applications.
2. Suitable for both on and off road use.
3. Pinned for studs to provide additional winter traction.
4. M&S designated.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	LT235/85R16	10PR	120/116	Q	6 1/2J	D1250 / S1400	550	806	235	13.5
	LT245/75R16	10PR	120/116	Q	7J	D1250 / S1400	550	774	248	13.5
	LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 / S1550	550	804	267	14.5
	LT285/75R16	10PR	126/123	Q	8J	D1550 / S1700	550	834	286	14.5
17	LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 / S1400	550	808	235	13.5
	LT265/70R17	10PR	121/118	Q	8J	D1320 / S1450	550	804	272	14.5
	LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 / S1450	550	832	292	14.5
18	LT275/65R18	10PR	123/120	Q	8J	D1400 / S1550	550	815	279	14.5




RADIAL666

Commercial tire with Excellent wear and wet performance

- 1. Excellent traction;
- 2. Excellent wet braking;
- 3. High wear resistance.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	155R12C	6PR	83/81	N	4.50B	D462 / S487	350	350	157	7.6
13	175R13LT	8PR	97/95	Q	5.00B	D690 / S730	450	450	182	7.6
14	165/70R14C	6PR	89/87	R	5J	D545 / S580	375	375	170	8.1
	185R14C	8PR	102/100	R/Q	5 1/2J	D800 / S850	450	450	189	9.3
	185R14LT	6PR	97/95	R	5 1/2J	D690 / S730	350	350	189	9.3
	185R14LT	8PR	102/100	R	5 1/2J	D800 / S850	450	450	189	9.3
	195R14C	8PR	106/104	P	5 1/2J	D900 / S950	450	450	196	9.2
	195R14C WR	8PR	106/104	P	5 1/2J	D900 / S950	450	450	196	9.2
	195/75R14C	8PR	106/104	R	5 1/2J	D900 / S950	475	475	196	9.5
	205/75R14C	8PR	109/107	R	5 1/2J	D975 / S1030	475	475	203	9.0
	215R14C	8PR	110/108	R	6J	D1000 / S1060	450	450	218	9.5
	215/75R14C	8PR	112/110	R	6J	D1060 / S1120	475	475	216	9.5
15	195R15C	8PR	106/104	R	5 1/2J	D900 / S950	450	450	198	8.3
	195R15C WR	8PR	106/104	R	5 1/2J	D900 / S950	450	450	198	8.3
	195/70R15C	8PR	104/102	R	6J	D850 / S900	450	450	201	10.0
	195/70R15LT	10PR	104/102	R	6J	D850 / S900	550	550	201	10.0
	205/70R15C	8PR	106/104	S	6J	D900 / S950	450	450	209	9.0
	205/70R15C WR	8PR	106/104	S	6J	D950 / S900	450	450	209	10.0
	215/70R15C	8PR	109/107	R	6 1/2J	D975 / S1030	450	450	221	9.5
	215/70R15C WR	8PR	109/107	R	6 1/2J	D975 / S1030	450	450	221	9.5
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 / S1120	450	450	228	9.0
255/70R15C	6PR	112/110	S	7 1/2J	D1060 / S1120	375	375	260	9.5	
16	175/75R16C	8PR	101/99	R	5J	D775 / S825	475	475	177	8.1
	185/75R16C	8PR	104/102	R	5J	D850 / S900	475	475	184	8.1
	195/65R16C	8PR	104/102	R	6J	D850 / S900	475	475	201	9.0
	195/75R16C	8PR	107/105	R	5 1/2J	D925 / S975	475	475	196	9.5
	205/65R16C	8PR	107/105	R	6J	D925 / S975	475	475	209	9.0
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 / S1060	475	475	203	9.0
	215/65R16C	8PR	109/107	R	6 1/2J	D975 / S1030	475	475	221	9.0
	215/70R16C	6PR	108/106	S	6 1/2J	D950 / S1000	375	375	221	9.3
	215/75R16C	8PR	113/111	R	6J	D1090 / S1150	475	475	216	9.0
	225/65R16C	8PR	112/110	R	6 1/2J	D1060 / S1120	475	475	228	9.1
	225/75R16C	10PR	121/120	R	6J	D1400 / S1450	575	575	223	9.0
	235/65R16C	8PR	115/113	R	7J	D1150 / S1215	475	475	240	9.0

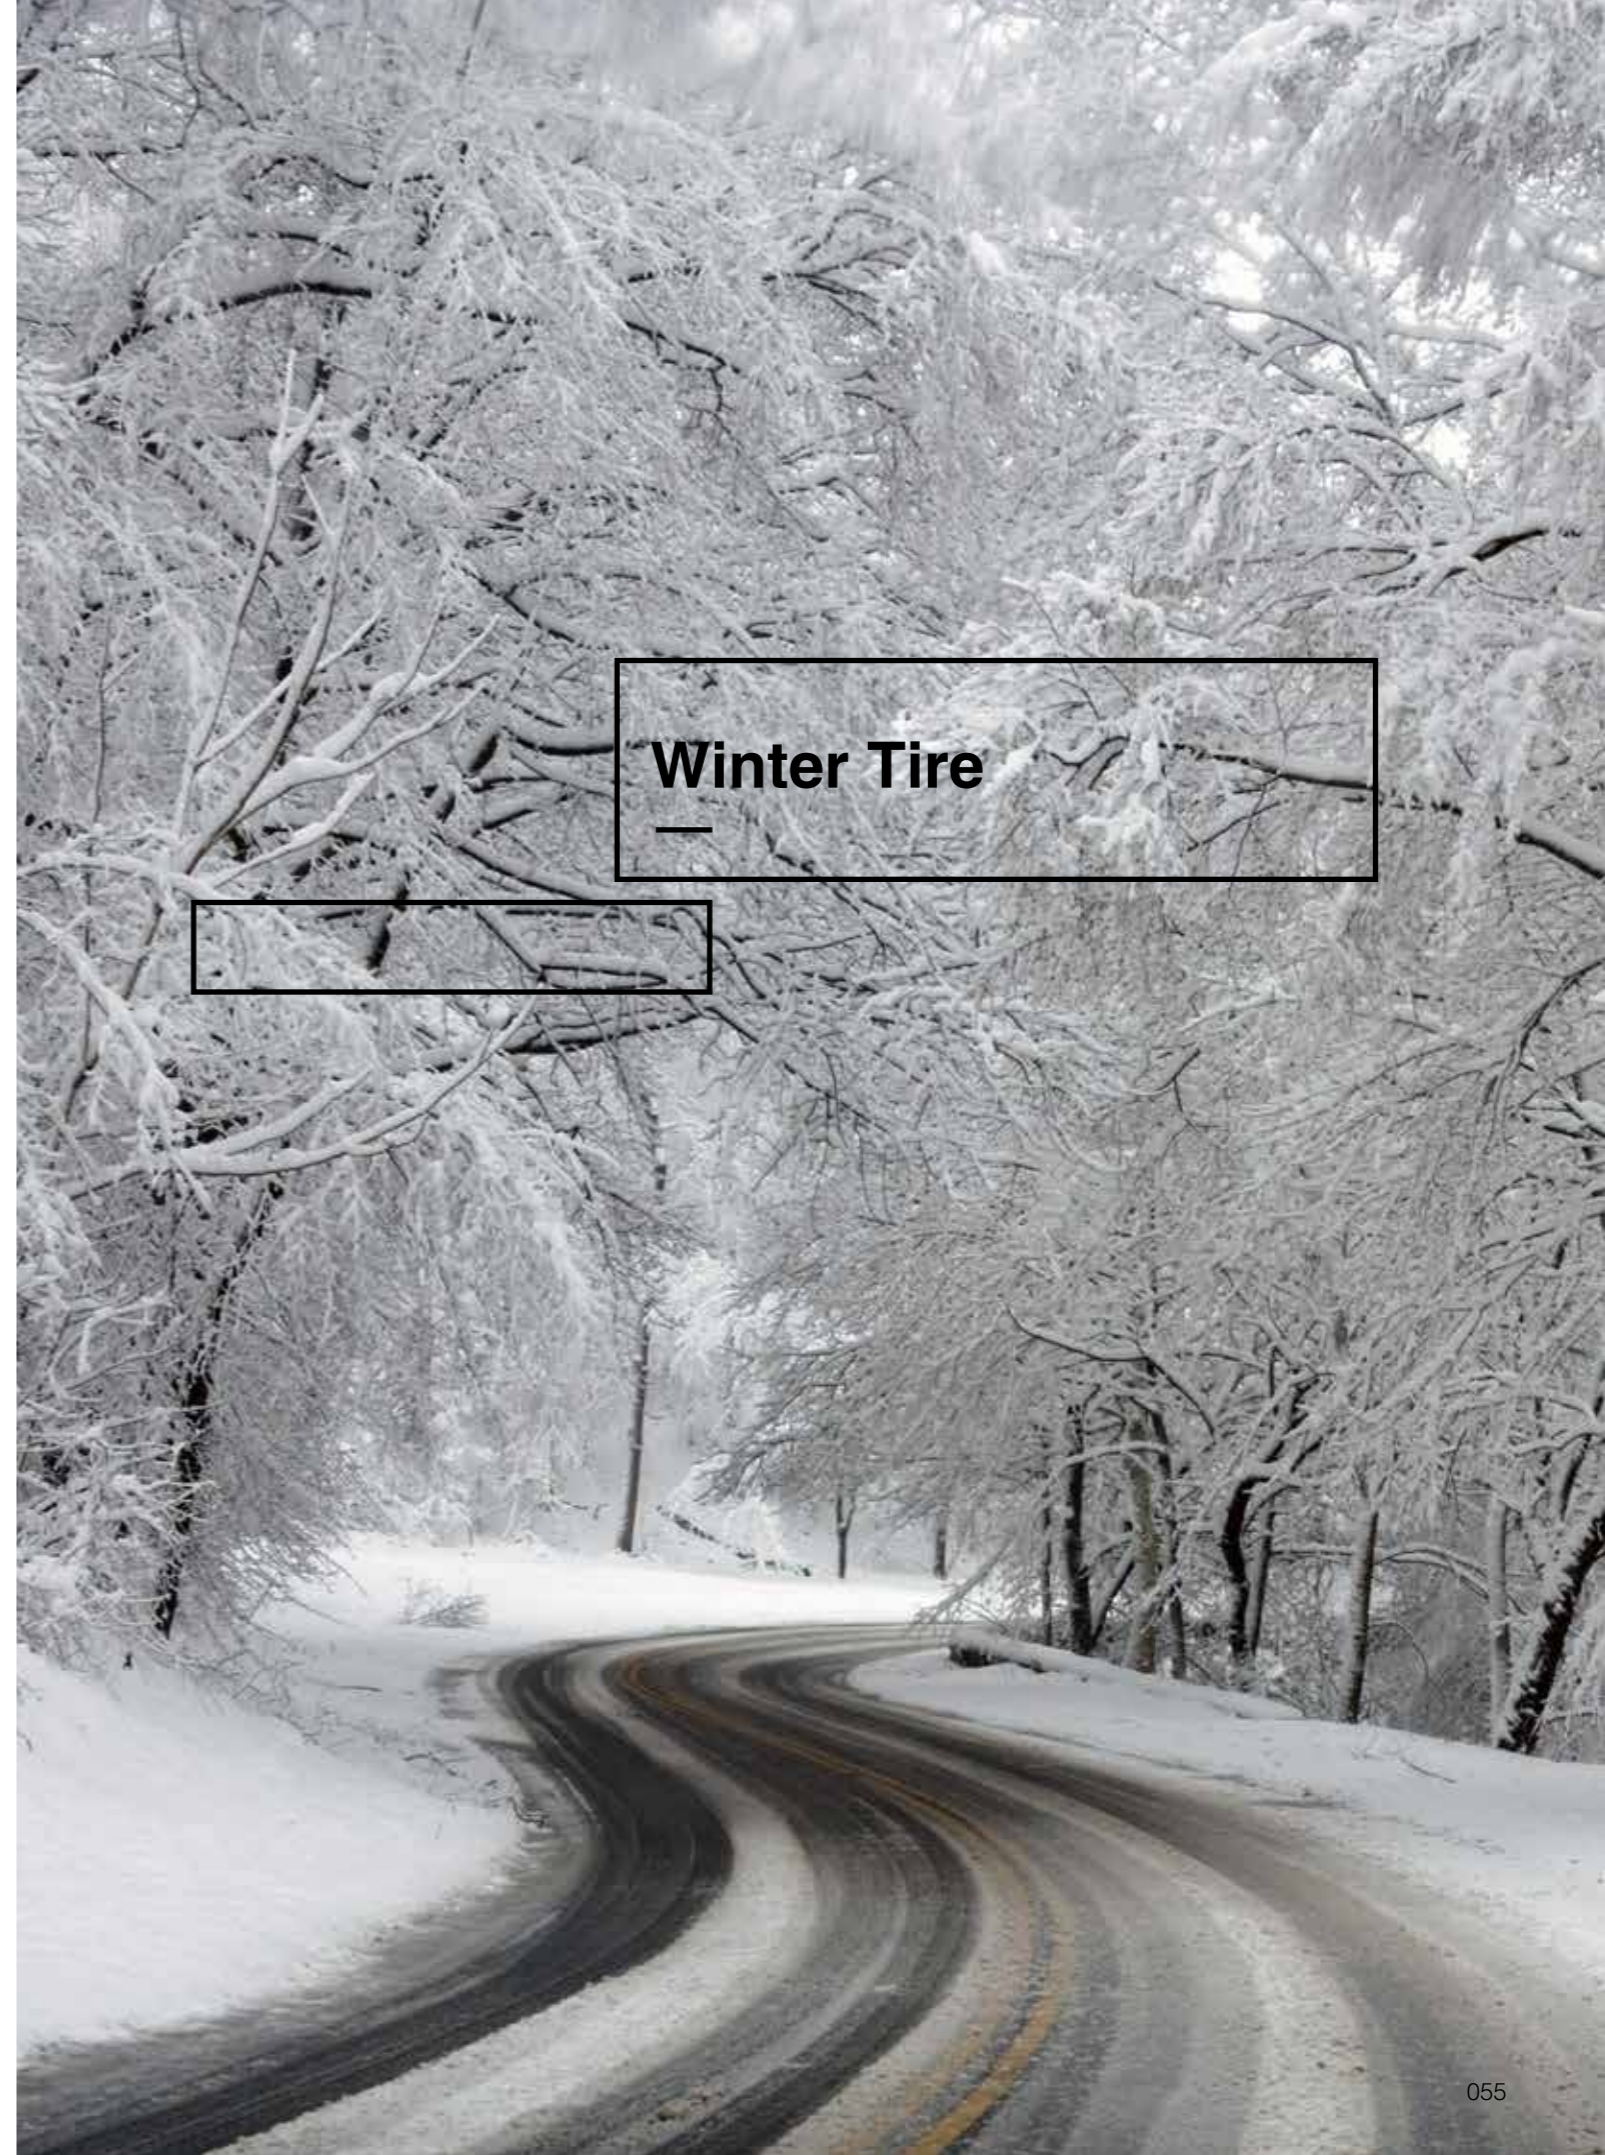

Winter Tire





GREEN-Max Winter Ice I-15 SUV

New

Outstanding handling performance

1. Directional grooves design for evacuate snow and mud;
2. Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	T	6J	710	250	669	209	9.7
	215/75R15	100	T	6J	800	250	703	216	9.7
	235/75R15	105	T	6 1/2J	925	250	733	235	9.7
16	215/65R16	98	T	6 1/2J	750	250	686	221	9.7
	225/60R16	98	T	6 1/2J	750	250	676	228	9.7
	235/70R16	106	T	7J	950	250	736	240	9.7
	245/70R16	107	H	7J	975	250	750	248	9.7
	275/70R16	114	T	8J	1180	250	792	279	9.7
17	215/60R17	96	T	6 1/2J	710	250	690	221	9.7
	225/60R17	99	T	6 1/2J	775	250	702	228	9.7
	225/65R17	102	T	6 1/2J	850	250	724	228	9.7
	225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
	235/55R17	99	T	7 1/2J	775	250	690	245	9.7
	235/65R17 XL	108	T	7J	1000	290	738	240	10.0
	235/50R17	96	T	7 1/2J	710	250	668	245	9.7
	245/45R17	95	T	8J	690	250	652	243	9.7
	245/65R17	107	T	7J	975	250	750	248	9.7
	255/45R17	98	T	8 1/2J	750	250	662	255	9.7
	255/60R17	106	T	7 1/2J	950	250	738	260	9.7
	265/65R17	112	T	8J	1120	250	776	272	9.7
	275/65R17	115	T	8J	1215	250	790	279	9.7
18	225/50R18	95	T	7J	690	250	683	233	9.7
	225/55R18	98	T	7J	750	250	705	233	9.7
	225/60R18	100	T	6 1/2J	800	250	727	228	9.7
	235/50R18	97	T	7 1/2J	730	250	693	245	9.7
	235/55R18	100	T	7 1/2J	800	250	715	245	9.7
	235/60R18	103	T	7J	875	250	739	240	9.7
	235/60R18 XL	107	T	7J	975	290	739	240	9.7
	235/65R18	106	T	7J	950	250	763	240	9.7
	245/40R18	93	T	8 1/2J	650	250	653	248	9.7
	245/45R18	96	T	8J	710	250	677	243	9.7
	245/50R18	100	T	7 1/2J	800	250	703	253	9.7
	245/60R18	105	T	7J	925	250	751	248	9.7
	255/40R18	95	T	9J	690	250	661	260	9.7
	255/45R18	99	T	8 1/2J	775	250	687	255	9.7
	255/55R18	105	T	8J	925	250	737	265	9.7
	255/60R18 XL	112	H	7 1/2J	1120	290	763	260	9.7
	265/60R18	110	T	8J	1060	250	775	272	9.7
	285/60R18	116	T	8 1/2J	1250	250	799	292	9.7

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
19	225/55R19	99	T	7J	775	250	731	233	9.7
	235/50R19	99	T	7 1/2J	775	250	719	245	9.7
	235/55R19 XL	105	H	7 1/2J	925	290	741	245	9.7
	245/40R19 XL	98	S	8 1/2J	750	290	679	248	9.2
	245/45R19	98	T	8J	750	250	703	243	9.7
	245/55R19	103	T	7 1/2J	875	250	753	253	9.7
	255/40R19	96	T	9J	710	250	687	260	9.7
	255/45R19	100	T	8 1/2J	800	250	713	255	9.7
	255/50R19	103	T	8J	875	250	739	265	9.7
	255/55R19	107	T	8J	975	250	763	265	9.7
	265/50R19	106	T	8 1/2J	950	250	749	277	9.7
	275/35R19	96	T	9 1/2J	710	250	675	278	9.7
	275/40R19	101	T	9 1/2J	825	250	703	278	9.7
	275/55R19	111	T	8 1/2J	1090	250	785	284	9.7
	285/45R19	107	T	9 1/2J	975	250	739	285	9.2
20	245/40R20	95	T	8 1/2J	690	250	704	248	9.7
	245/45R20	99	T	8J	775	250	728	243	9.7
	245/50R20	102	T	7 1/2J	850	250	754	253	9.7
	255/45R20	101	T	8 1/2J	825	250	738	255	9.7
	255/50R20 XL	109	H	8J	1030	290	764	265	9.7
	255/55R20 XL	110	T	8J	1060	290	788	265	9.7
	265/45R20	104	T	9J	900	250	746	266	9.7
	265/50R20	107	T	8 1/2J	975	250	774	277	9.7
	275/40R20	102	T	9 1/2J	850	250	728	278	9.7
	275/45R20 XL	110	T	9J	1060	290	756	273	9.7
	275/55R20	113	T	8 1/2J	1150	250	810	284	9.7
	285/35R20	100	T	10J	800	250	708	290	9.7
	285/45R20	108	T	9 1/2J	1000	250	764	285	9.7
285/50R20	112	T	9J	1120	250	794	297	9.7	
315/35R20	106	T	11J	950	250	728	320	9.7	
21	265/45R21	104	T	9J	900	250	771	266	9.7
	275/45R21	107	T	9J	975	250	781	273	9.7
	275/50R21 XL	113	T	8 1/2J	1150	290	809	284	9.7
	285/45R21	109	T	9 1/2J	1030	250	789	285	9.7
	295/40R21	107	T	10 1/2J	975	250	769	301	9.7



GREEN-Max Winter Ice I-16 New

Excellent snow handling and ice braking&acceleration

1. Outstanding grip and traction performance on ice and snow surface;
2. Better braking and acceleration property.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	145/70R12	69	T	4.50B	325	250	509	150	8.3
13	165/70R13	79	T	5.00B	437	250	562	170	8.3
	175/70R13	82	T	5.00B	475	250	576	177	8.7
14	165/60R14	75	T	5J	387	250	554	170	8.3
	165/70R14	81	T	5J	462	250	588	170	8.3
	175/70R14	84	T	5J	500	250	602	177	8.3
	185/60R14	82	T	5 1/2J	475	250	578	189	8.7
	185/65R14	86	T	5 1/2J	530	250	596	189	8.7
	185/70R14	88	T	5 1/2J	560	250	616	189	8.7
	195/60R14	86	T	6J	530	250	590	201	8.7
	215/75R14	100	T	6J	800	250	678	216	8.7
15	175/65R15	84	T	5J	500	250	609	177	8.7
	185/55R15	82	T	6J	475	250	585	194	8.7
	185/60R15	84	T	5 1/2J	500	250	603	189	8.7
	185/65R15	88	T	5 1/2J	560	250	621	189	8.7
	195/55R15	85	T	6J	515	250	595	201	8.7
	195/60R15	88	T	6J	560	250	615	201	8.7
	195/65R15	91	T	6J	615	250	635	201	8.7
	205/65R15	94	T	6J	670	250	647	209	8.7
16	195/60R16	89	S	6J	580	250	640	201	8.7
	205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
	205/60R16	92	T	6J	630	250	652	209	8.7
17	215/50R17	91	T	7J	615	250	648	226	8.7
	215/55R17	94	T	7J	670	250	668	226	8.7
18	225/45R18	91	T	7 1/2J	615	250	659	225	8.7
	235/45R18	94	T	8J	670	250	669	236	8.7
19	225/45R19	92	T	7 1/2J	630	250	685	225	8.7



GREEN-Max Winter UHP

Ultra High performance snow tires with superior handling performance

1. Excellent snow handling performance.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	185/55R15 XL	86	H	6J	530	290	585	194	8.3
	195/50R15	82	H	6J	475	250	577	201	8.3
	195/55R15	85	H	6J	515	250	595	201	8.6
16	195/55R16 XL	91	H	6J	615	290	620	201	8.6
	225/55R16 XL	99	H	7J	775	290	654	233	8.6
	225/60R16 XL	102	H	6 1/2J	850	290	676	228	8.6
17	205/45R17 XL	88	V	7J	560	290	616	206	8.6
	205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.6
	215/45R17 XL	91	V	7J	615	290	626	213	8.6
	215/50R17 XL	95	V	7J	690	290	648	226	8.6
	215/55R17	94	V	7J	670	250	668	226	8.6
	215/60R17	96	H	6 1/2J	710	250	690	221	8.6
	225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.6
	225/50R17 XL	98	V	7J	750	290	658	233	8.6
	225/55R17 XL	101	V	7J	825	290	680	233	8.6
	235/45R17 XL	97	H	8J	730	290	644	236	8.6
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.6
18	225/40R18 XL	92	V	8J	630	290	637	230	8.6
	225/45R18 XL	95	H	7 1/2J	690	290	659	225	8.6
	235/45R18 XL	98	V	8J	750	290	669	236	8.6
	235/55R18 XL	104	H	7 1/2J	900	290	715	245	8.6
	235/60R18 XL	107	H	7J	975	290	739	240	8.6
	245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.6
	245/45R18 XL	100	H	8J	800	290	677	243	8.6
	235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.1
19	245/40R19 XL	98	V	8 1/2J	750	290	679	248	8.1
	245/45R19 XL	102	V	8J	850	290	703	243	8.1
	255/35R19 XL	96	V	9J	710	290	661	260	8.1
	255/40R19 XL	100	V	9J	800	290	687	260	8.1
	255/45R19 XL	104	H	8 1/2J	900	290	713	255	8.6
	255/50R19 XL	107	V	8J	975	290	739	265	8.1
	255/55R19 XL	111	H	8J	1090	290	763	265	8.6
	275/40R19 XL	105	V	9 1/2J	925	290	703	278	8.1
20	245/45R20 XL	103	H	8J	875	290	728	243	8.6
	255/35R20 XL	97	V	9J	730	290	686	260	8.1
	275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.1
	275/45R20 XL	110	H	9J	1060	290	756	273	8.6
	315/35R20 XL	110	V	11J	1060	290	728	320	8.1



GREEN-Max Winter HP

High performance snow tires with excellent braking performance

1. Excellent snow braking performance.
2. Comfortably snow driving.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	T	4.50B	387	250	548	157	8.2
	155/80R13	79	T	4.50B	437	240	578	157	8.2
	165/70R13	79	T	5.00B	437	250	562	170	8.2
	175/70R13	82	T	5.00B	475	250	576	177	8.2
14	155/65R14	75	T	4 1/2J	387	250	558	157	8.2
	165/65R14	79	T	5J	437	250	570	170	8.2
	165/70R14	81	T	5J	462	250	588	170	8.2
	175/65R14 XL	86	H	5J	530	290	584	177	8.2
	175/70R14	84	T	5J	500	250	602	177	8.2
	185/60R14	82	T	5 1/2J	475	250	578	189	8.5
	185/65R14	86	T	5 1/2J	530	250	596	189	8.5
	175/65R15 XL	88	H	5J	560	290	609	177	8.0
15	185/60R15 XL	88	H	5 1/2J	560	290	603	189	8.5
	185/65R15 XL	92	H	5 1/2J	630	290	621	189	8.5
	195/60R15 XL	92	H	6J	630	290	615	201	8.5
	195/65R15 XL	95	T	6J	690	290	635	201	8.5
	205/65R15 XL	99	H	6J	775	290	647	209	8.5
	205/70R15	96	T	6J	710	250	669	209	8.5
	205/55R16 XL	94	H	6 1/2J	670	290	632	214	8.5
16	205/60R16 XL	96	H	6J	710	290	652	209	8.5
	215/55R16 XL	97	H	7J	730	290	642	226	8.5
	215/60R16 XL	99	H	6 1/2J	775	290	664	221	8.5
	215/65R16	98	H	6 1/2J	750	250	686	221	8.5



GREEN-Max Winter Grip^{SUV}

(Can not sale in CANADA)

Studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Excellent snow traction performance with directional tread pattern design;
3. Great grip and handling performance on ice and snow surface;
4. Designed for SUVs.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
17	225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
	235/60R17 XL	106	T	7J	950	290	714	240	9.7
	235/65R17 XL	108	T	7J	1000	290	738	240	9.7
	265/70R17	115	T	8J	1215	250	804	272	9.7
18	225/55R18	98	T	7J	750	250	705	233	9.7
	255/55R18 XL	109	T	8J	1030	290	737	265	9.7
	275/60R18 XL	117	T	8J	1285	290	787	279	9.7
20	275/45R20 XL	110	T	9J	1060	290	756	273	9.7
	275/55R20 XL	117	T	8 1/2J	1285	290	810	284	9.7



New

GREEN-Max Winter Ice I-15

Outstanding handling performance

1. Direction tread pattern design providing excellent handling performance;
2. Directional grooves to help evacuate snow and mud.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/65R14 XL	86	T	5J	530	290	584	177	8.7
15	185/60R15 XL	88	T	5 1/2J	560	290	603	189	8.7
	185/65R15 XL	92	T	5 1/2J	630	290	621	189	8.7
	195/65R15 XL	95	T	6J	690	290	635	201	8.7
16	195/55R16 XL	91	T	6J	615	290	620	201	8.7
	205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
	205/60R16 XL	96	T	6J	710	290	652	209	8.7
	215/55R16 XL	97	T	7J	730	290	642	226	8.7
	215/60R16 XL	99	T	6 1/2J	775	290	664	221	8.7
	215/65R16 XL	102	T	6 1/2J	850	290	686	221	8.7
	225/55R16 XL	99	T	7J	775	290	654	233	8.7
	205/50R17 XL	93	T	6 1/2J	650	290	638	223	8.7
17	225/45R17 XL	94	T	7 1/2J	670	290	634	225	8.7
	225/50R17 XL	98	T	7J	750	290	658	233	8.7
	225/55R17 XL	101	T	7J	825	290	680	233	8.7
	235/45R17 XL	97	T	8J	730	290	644	236	8.7



New

GREEN-Max Winter Grip²

The Second studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Directional tread pattern design for excellent snow traction performance;
3. Great grip and handling performance on ice and snow surface.

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/65R14 XL	86	T	5J	530	290	584	177	8.9
15	185/60R15	84	T	5 1/2J	500	250	603	189	8.9
	185/65R15	88	T	5 1/2J	560	250	621	189	8.9
	195/65R15 XL	95	T	6J	690	290	635	201	8.9
16	205/60R16 XL	96	T	6J	710	290	652	209	8.9
	215/60R16	95	T	6 1/2J	690	250	664	221	8.9
	215/70R16	100	T	6 1/2J	800	250	708	221	8.9
17	225/50R17 XL	98	T	7J	750	290	658	233	8.9
18	225/40R18 XL	92	T	8J	630	290	637	230	8.9
19	245/40R19 XL	98	T	8 1/2J	750	290	679	248	8.9



GREEN-Max Winter Van

Excellent snow traction performance

1. Excellent snow traction performance.
2. Focus on driving safety of vehicles in winter.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	165R13C	6PR	89/88	Q	4.50B	D560 / S580	350	594	165	8.0
14	175R14C	6PR	94/92	Q	5J	D630 / S670	350	636	177	8.0
	185R14C	8PR	102/100	Q	6J	D800 / S850	450	652	189	9.6
	195R14C	8PR	106/104	P	5 1/2J	D900 / S950	450	666	198	9.8
15	195/70R15C	8PR	104/102	R	6J	D850 / S900	450	655	201	10.0
	225/70R15LT	8PR	106/103	R	6 1/2J	D875 / S950	450	697	228	10.0
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 / S1120	450	697	228	10.0
16	175/75R16C	8PR	101/99	R	5J	D775 / S825	475	668	177	9.6
	185/75R16C	8PR	104/102	R	5J	D850 / S900	475	684	184	9.6
	195/75R16C	8PR	107/105	R	5 1/2J	D925 / S975	475	698	196	10.0
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 / S1060	475	714	203	10.0
	215/75R16C	8PR	113/111	R	6J	D1090 / S1150	475	728	216	10.0
	225/65R16C	8PR	112/110	R	6 1/2J	D1060 / S1120	475	698	228	9.8
	225/75R16C	10PR	121/120	R	6J	D1400 / S1450	575	744	223	10.0
	235/65R16C	10PR	121/119	R	7J	D1360 / S1450	575	712	240	9.8



GREEN-Max Winter Grip

(Can not sale in CANADA)

Studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Directional tread pattern design for excellent snow traction performance;
3. Great grip and handling performance on ice and snow surface.



New —

GREEN-Max Winter Grip Van 2

Studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Great grip and handling performance on ice and snow surface.

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
10	195/55R10LT	/	98/96	N	6.00B	D 710/S 750	625	468	201	10.2
13	155R13LT	8PR	90/88	R	4.50B	D 560/S 600	450	578	157	10.2
	155R13C	/	91/89	N	4.50B	D 580/S 615	450	578	157	10.2
	165R13LT	/	96/94	N	4.50B	D 670/S 710	450	594	165	10.2
	175R13LT	8PR	97/95	Q	5.00B	D 690/S 730	450	610	177	10.2
	195/50R13LT	/	104/101	N	6.00B	D 825/S 900	650	526	201	10.2
14	185R14LT	8PR	102/100	R	5 1/2J	D 800/S 850	450	652	189	10.2
15	195/70R15C	8PR	104/102	R	6J	D 850/S 900	450	655	201	10.2
	215/70R15LT	8PR	109/107	R	6 1/2J	D 975/S 1030	450	683	221	10.2
	225/70R15LT	8PR	112/110	R	6 1/2J	D 1060/S 1120	450	697	228	10.2
	185/75R16LT	8PR	104/102	R	5J	D 850/S 900	475	684	184	10.2
16	195/75R16LT	8PR	107/105	R	5 1/2J	D 925/S 975	475	698	196	10.2
	205/65R16LT	8PR	107/105	R	6J	D 925/S 975	475	672	209	10.2
	215/65R16C	8PR	109/107	R	6 1/2J	D 975/S 1030	475	686	221	10.2
	205/75R16LT	8PR	110/108	R	5 1/2J	D 1000/S 1060	475	714	203	10.2
	215/75R16LT	10PR	116/114	R	6J	D 1180/S 1250	525	728	216	10.2
	225/65R16LT	8PR	112/110	R	6 1/2J	D 1060/S 1120	475	698	228	10.2
	225/75R16LT	10PR	121/120	R	6J	D 1400/S 1450	575	744	223	10.2
	235/65R16LT	10PR	121/119	R	7J	D 1360/S 1450	575	712	240	10.2
	17	215/60R17LT	8PR	109/107	R	6 1/2J	D 975/S 1030	450	690	221
235/60R17LT		10PR	117/115	Q	7J	D 1215/S 1285	525	714	240	10.2

RIM	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	T	4.50B	387	250	548	157	9.7
	155/80R13	79	T	4.50B	437	240	578	157	9.7
	165/70R13	79	Q	5.00B	437	250	562	170	9.7
	175/70R13	82	T	5.00B	475	250	576	177	9.7
14	175/65R14 XL	86	T	5J	530	290	584	177	9.7
	185/60R14	82	T	5 1/2J	475	250	578	189	9.7
	185/65R14 XL	90	T	5 1/2J	600	290	596	189	9.7
	185/70R14 XL	92	T	5 1/2J	630	290	616	189	9.7
	185/55R15 XL	86	T	6J	530	290	585	194	9.7
15	185/65R15	88	T	5 1/2J	560	250	621	189	9.7
	195/60R15 XL	92	T	6J	630	290	615	201	9.7
	195/65R15 XL	95	T	6J	690	290	635	201	9.7
	205/65R15 XL	99	T	6J	775	290	647	209	9.7
	205/55R16 XL	94	T	6 1/2J	670	290	632	214	9.7
16	205/60R16 XL	96	T	6J	710	290	652	209	9.7
	215/55R16 XL	97	T	7J	730	290	642	226	9.7
	215/60R16	95	T	6 1/2J	690	250	664	221	9.7
	215/65R16	98	T	6 1/2J	750	250	686	221	9.7
	215/70R16 XL	104	T	6 1/2J	900	290	708	221	9.7
	215/50R17 XL	95	T	7J	690	290	648	226	9.7
17	215/55R17 XL	98	T	7J	750	290	668	226	9.7
	225/45R17 XL	94	T	7 1/2J	670	290	634	225	9.7
	225/55R17	97	T	7J	730	250	680	233	9.7



TBR TIRE

Long Haul



ETS100 New

Radial Truck Tire (For international long-distance transportation)

Suitable for steer axle of trucks running with high speed on highway.

- 1 Low rolling resistance, reducing fuel consumption
- 2 Lasting grip and stability by hidden groove design
- 3 New pattern design improves mileage for long-distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	13.0	ETRTO




ETD100 New

Radial Truck Tire (For international long-distance transportation)

Suitable for drive axle of trucks running with high speed on highway.

- 1 Low rolling resistance reduces fuel consumption
- 2 Lasting grip and stability by hidden groove design, with M+S and 3PMSF marking
- 3 New pattern design improves mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	16.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	16.0	ETRTO




KTD10 New

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

- 1.Low rolling resistance reduces fuel consumption
- 2.Closed shoulder to fight irregular wear
- 3.New pattern design improves mileage for long-distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	23.8	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	23.8	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	23.8	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	23.8	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.2	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.2	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.2	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.2	TRA




LDE803

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

- 1.Low fuel consumption.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.5	ETRTO




LLD01

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

- 1.Good grip and high-speed performance.
- 2.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	19.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO




LFE805

Radial Truck Tire (Long Haul Steer)

1.S-shaped groove bottom reduces stone retention.

- 2.Good handling and high-speed performance.
- 3.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	15.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO



T830

Radial Truck Tire (Long Haul)

Suitable for the trailer axle of trucks running on highway.

- 1.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	15.5	ETRTO




T820

Radial Truck Tire

Suitable for the trailer axle of the trucks running on highway.

- 1.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/45R19.5	18	156	J	15.00	---	---	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	---	---	4500	900	895	446	15.5	ETRTO
435/50R19.5	18	156	J	14.00	---	---	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	---	---	4500	900	931	438	12.5	ETRTO
385/55R19.5	18	156	J	12.25	---	---	4000	900	919	386	12.5	ETRTO



LFE891

New

Radial Truck Tire (Long Haul Steer)

1.Maximize tread volume for long original life and lower tread wear cost per mile.

2.Equalizer ribs absorb irregular wear, promoting uniform rib wear and higher removal mileage.

3.Micro sipes protects against irregular wear.

4.Strong carcass materials.

5.Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA




ETT100

New

Radial Truck Tire (For international long-distance transportation)

Suitable for trailer axle of trucks running with high speed on highway.

- 1 Low rolling resistance reduces fuel consumption
- 2 Lasting grip and stability by hidden groove design
- 3 New pattern design improves mileage for long-distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	12.0	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	12.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	13.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	14.5	TRA
425/65R22.5	20	164	K	12.25	--	--	5000	830	1124	422	14.5	GB
425/65R22.5	20	165	K	12.25	--	--	5150	830	1124	422	14.5	TRA
425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	14.5	ETRTO
435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	12.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	12.5	ETRTO



LDE892

New

Radial Truck Tire

Suitable for the drive axle of trucks running on highway.

1.Good braking and grip on wet road.

2.Long life, low rolling resistance.

3.Optimize the footprint for even wear and long tread longevity.

4.Strong carcass materials

5.Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.0	TRA



LLF16

Radial Truck Tire

Suitable for the steer axle of the trucks running on highway.

1. Good handling.
2. Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



LLD37

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

1. Good braking and grip on wet road.
2. Long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



LTE821

Radial Truck Tire (Long Haul Trailer)

1. Excellent straight running performance.
2. Sipes in shoulder offer low noise and good heat dissipation.
3. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA



LDL817

Radial Truck Tire (Long Haul Drive)

1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Low fuel consumption.
3. Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0	ETRTO



LTL811

Radial Truck Tire

Suitable for the trailer axle of trucks running on highway.

- 1.Low fuel consumption.
- 2.Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO




LLF02

Radial Truck Tire

Suitable for the steer axle of the trucks running on highway.

- 1.Stable and safe when running on wet and slippery road.
- 2.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



LLF16e+

Radial Truck Tire (Long Haul Steer)

1.Good handling.

2.Low fuel consumption.

3.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



LLD37e+

Radial Truck Tire


Suitable for the drive axle of the trucks running on highway.

1.Good braking and grip on wet road.

2.Long life.

3.Low fuel consumption.

4.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



Regional




KTD200 New

Radial Truck Tire (For national and regional transportation)

Suitable for the drive axle of trucks running on highway, national road, general road

1. Optimization of the shoulder block improves resistance to shoulder damage
2. Lasting grip and stability with M+S and 3PMSF marking
3. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO



KTS300 New

Radial Truck Tire (For national and regional transportation)

Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road

1. Optimization of the shoulder block improves resistance to shoulder damage
2. Lasting grip and stability with stone rejection design
3. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO




KTA303 New —

Radial truck tire(for national and regional transportation)

Suitable for all position axle of trucks running under a wide range of use from highway to light unpaved road

1. Optimization of the shoulder block improves resistance to shouder damage
2. Lasting grip and stability with stone rejection design
3. HAT technology low heat generation



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	11.5	ETRTO
9.5R17.5	18	143/141	M	6.75	2575	875	2725	875	842	240	11.5	ETRTO
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	14.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	12.0	ETRTO
215/75R17.5	16	135/133	L/J	6.00	2060	850	2180	850	767	211	12.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	L/J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	12.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	12.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.0	ETRTO
385/65R22.5	20	160	K	11.75	---	---	4500	900	1072	389	16.0	ETRTO




KTD303 New —

Radial truck tire(For national and regional transportation)

Suitable for drive axle of trucks running under a wide range of use from highway to light unpaved road

1. Optimization of the shoulder block improves resistance to shouder damage
2. Lasting grip and stability with M+S marking
3. HAT technology low heat generation




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	17.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
9.5R17.5	14	129/127	L	6.75	1750	750	1850	750	842	240	14.5	ETRTO
9.5R17.5	18	143/141	L	6.75	2575	875	2725	875	842	240	14.5	ETRTO
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	19.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	L	6.75	2575	875	2725	875	797	233	14.5	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	14.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	14.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	14.5	ETRTO



KLS200

Radial truck tire (Regional Steer)

- 1. Long life.
- 2. Retreadability.
- 3. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	13.5	ETRTO



KLD200

Radial truck tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	16.0	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	16.0	TRA
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	16.0	ETRTO




KTD101

New

Radial truck tire (For national and regional transportation)

Suitable for the drive axle of trucks running on highway,national road,general road

- 1. Optimization of the shoulder block improves resistance to shoulder damage
- 2. Lasting grip and stability with M+S marking
- 3. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB




KTD300

New

Radial Truck Tire(For national and regional transportation)

Suitable for the drive axle of trucks running under an wide range of use, from highway to light unpaved road

- 1. Optimization of the shoulder block improves resistance to shoulder damage
- 2. Lasting grip and stability with M+S and 3PMSF marking
- 3. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO



KTA20

New

Radial Truck Tire

Suitable for all position of trucks using for high traction and high scrub applications.

1. Wide, strong shoulder ribs increase tread life
2. Lasting grip and stability
3. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	15.1	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	15.1	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	15.1	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	15.1	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	15.1	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	15.1	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1050	283	15.1	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1050	283	15.1	TRA



LFL185

New

Radial truck tire (Regional Steer)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Four straight groove matching S type variable angle groove design and ensure good steering tyre and self-cleaning properties.
3. Ultra strong skeleton materials applications and promote tire safety performance.
4. High wear resistance of new formula application and wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO




KTD301

New

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	22.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	22.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.5	ETTRO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	22.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA



LDL186

New

Radial truck tire (Regional Drive)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Classic mahjong block pattern style matching variable angle groove design and ensure a strong drive and self-cleaning.
3. Ultra strong skeleton materials applications and promote tire safety performance.
4. High wear resistance of new formula application and wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO




LDL161

New —

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB



LTL812

Radial truck tire (Regional Steer)

1. Long life.
2. Retreadability.
3. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	17.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.0	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	17.0	ETRTO



LDL831

Radial truck tire (Regional Drive)

1. Typical block pattern design makes good grip performance.
2. High wear resistance and long life.
3. Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	21.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	21.5	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	23.0	ETRTO



LDL813

Radial truck tire (Regional Drive)

1. Long life.
2. Good grip performance.
3. Retreadability.
4. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



LTL863

Radial Truck Tire (Regional Trailer)

1. Typical combined pattern design offers optimal trailer performance.
2. Low rolling resistance.
3. Wear-resistance compound reduces shifting to prevent uneven wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
385/65R22.5	24	164	J	11.75	---	---	5000	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J/K	13.00	---	---	5800	900	1150	444	18.0	ETRTO
385/55R22.5	18	158	K	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO



LAL836

Radial truck tire (Regional All position)

1. Good handling and driving.
2. Long life.
3. Retreadability.
4. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	TRA
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	18.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	18.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



LFL177 New

Radial truck tire (Regional Steer)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Four straight groove matching S type variable angle groove design and ensure good steering tyre and self-cleaning properties.
3. Ultra strong skeleton materials applications and promote tire safety performance.
4. High wear resistance of new formula application and wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



LLF76

Radial Truck Tire

Suitable for all position axle of buses and medium trucks.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8R22.5	12	128/126	M	6.00	1700	760	1800	760	935	203	13.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	13.0	GB



LFL827

Radial truck tire (Regional Steer)

1. New technology for tire to reduce the weight.
2. Low eccentric wear.
3. Low fuel consumption.
4. Good handling.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	13.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	13.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	13.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	13.0	ETRTO
385/65R22.5	18	158	K	11.75	—	—	4250	850	1072	389	13.0	ETRTO
385/65R22.5	20	160	J	11.75	—	—	4500	900	1072	389	13.0	ETRTO



LLF01

Radial Truck Tire

1. Special design for steer and trailer axle of trucks.
2. Good side-wear resistance.
3. High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150 (152/148)	(L)M	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO



LLF56+

Radial Truck Tire

Suitable for all position axle of buses and trucks.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	14.0	ETRTO
10R22.5	16	144/142	L	7.50	2650	900	2800	900	1019	254	14.0	GB



LLF02

Radial Truck Tire

- 1.Special design for steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



LLF06

Radial truck tire

- 1.Special design for all position of buses and steer or trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	L	7.0	2430	790	2575	790	1019	259	14.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.0	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



F860

Radial Truck Tire (Regional)

- 1.Special design for all position of buses and steer or trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	14.5	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	14.5	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO



D905

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	17.0	ETTRO
295/80R22.5	18	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	17.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO



D915

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



D930

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	19.5	TRA
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



LLA18

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



LLA28

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the multi road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO



LAL800

Radial Truck Tire

Suitable for all position axle of trucks running on the multi road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.0	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.0	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



F805

Radial Truck Tire

- 1.Special design for steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
305/70R22.5	14	150/148	L	9.00	3150	850	3350	850	1000	305	14.5	ETRTO
305/70R22.5	16	152/148	L	9.00	3150	900	3550	900	1000	305	14.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	14.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	14.5	ETRTO



F860+

Radial Truck Tire

- 1.Special design for steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.
- 4.New technology for tire to reduce the weight




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.0	ETTRO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO



D935

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	18.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB



LLD37

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the multi road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	16.0	ETRTO



C600

Radial truck tire

Suitable for all position axle of trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	.016	ETRTO



F816

Radial Truck Tire

- 1. Special design for steer and trailer axle of trucks.
- 2. Good side-wear resistance.
- 3. High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



D928

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.5	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA



F816e+

Radial truck tire (Regional All position)

- 1. Good handling.
- 2. Low fuel consumption.
- 3. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



T810

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.75	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.75	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75	TRA
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75	TRA



LLF02e+

Radial truck tire (Regional All position)

- 1. Good handling.
- 2. Low fuel consumption.
- 3. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	14.5	TRA
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	14.5	TRA



T810e+

Radial truck tire (Regional Trailer)

- 1. Low fuel consumption.
- 2. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA



T820

Radial Truck Tire

Suitable for all position axle of trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12.0	ETRTO



LLA18e+

Radial truck tire (Regional Trailer)

- 1. Low fuel consumption.
- 2. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	830	1072	389	16.5	TRA



LLF26

Radial Truck Tire

Suitable for all position axle of medium trucks.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	11.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	11.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.5	GB



D900

Radial Truck Tire (Regional Drive)

1. New technology for tire to reduce the weight.
2. Low eccentric wear.
3. Low fuel consumption.
4. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



LAL800e+

Radial truck tire (Regional All position)

1. Good handling.
2. Low fuel consumption.
3. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA



F820

Radial truck tire (Regional All position)

Suitable for all position axle of buses and medium trucks.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	L	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	ETRTO
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	14.5	ETRTO

On&Off Road



KMA400 New

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability with M+S and 3PMSF marking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO



KMD406 New

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture
- 3.Lasting grip and stability with M+S and 3PMSF marking



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



KXA400 New —

Radial Truck Tire (On&Off Road)

Suitable for trailer and steer axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability with M+S and 3PMSF marking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	L	11.75	/	/	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	/	/	4500	900	1072	389	18.0	ETRTO
385/65R22.5	24	164	J	11.75	/	/	5000	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	12.25	/	/	5150	825	1124	422	18.5	ETRTO



KMA40 New —

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.

- 1.Chip,cut and abrasion resistance tread compound.
- 2.Stone rejection design protects groove bottom from stone puncture
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA



LLD09

Radial Truck Tire (On&Off Road drive)

- 1.Rigid block design for good traction.
- 2.Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB



KMA403 New —

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture
- 3.HAT technology low heat generation



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	15.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO



KMD401 New

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
 1. Chip, cut and abrasion resistance tread compound.
 2. Stone rejection design protects groove bottom from stone puncture
 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETTRO
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB



KMD403 New

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
 1. Thick sidewall design protects against sidewall impacts and bruises.
 2. Stone rejection design protects groove bottom from stone puncture
 3. HAT technology low heat generation



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	19.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	19.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.5	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO



KMD402 New

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.
 1. Thick sidewall design protects against sidewall impacts and bruises.
 2. Stone rejection design protects groove bottom from stone puncture
 3. Lasting grip and stability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.5	ETRTO



LDR978

Radial Truck Tire (On&Off Road drive)

1. Good traction.
 2. Chip, cut and abrasion resistance tread compound.
 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	20.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



LAR919

Radial Truck Tire (On&Off Road all position)

1. Pattern block design reduces shoulder heat
2. Wide running surface and higher saturation design improves the wear mileage.
3. Powerful traction, grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	14.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	14.5	GB
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	19.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	20.0	ETRTO
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	18.0	ETRTO
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB



LLA08

Radial Truck Tire (On&Off Road all position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	15.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
11R24.5	14	146/143	K	8.25	2725	720	3000	720	1104	279	15.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	15.5	TRA
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	ETRTO





LLA01

Radial Truck Tire (On&Off Road all position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



LAR959

Radial Truck Tire (On&Off Road all position)

- 1. Wide and deep tread grooves for long tire life.
- 2. Excellent cutting and chipping resistance.
- 3. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	18.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	19.0	GB
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	23.0	ETRTO



D960

Radial Truck Tire (On&Off Road drive)

- 1. Deep and rigid block design for long life and good traction.
- 2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



A968/LTR968*

Radial Truck Tire (On&Off Road trailer)

- 1. Cut resistance compound.
- 2. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R15TR	12	133/131	M	7.50	1950	620	2060	620	927	278	17.5	TRA
10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
11R17.5	12	133/131	M	8.25	1950	620	2060	620	927	279	17.5	TRA
11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	17.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA
275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17	ETRTO



LLA58

Radial Truck Tire (On&Off Road all position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	14.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	14.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



LLA08e+

Radial Truck Tire (On&Off Road all position)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.
- 4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.0	TRA



LLA38


Radial Truck Tire (On&Off Road trailer)

- 1. Typical combined pattern.
- 2. Cut resistance compound.
- 3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	---	---	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	13.00	---	---	5800	900	1150	444	18.0	ETRTO

Off Road

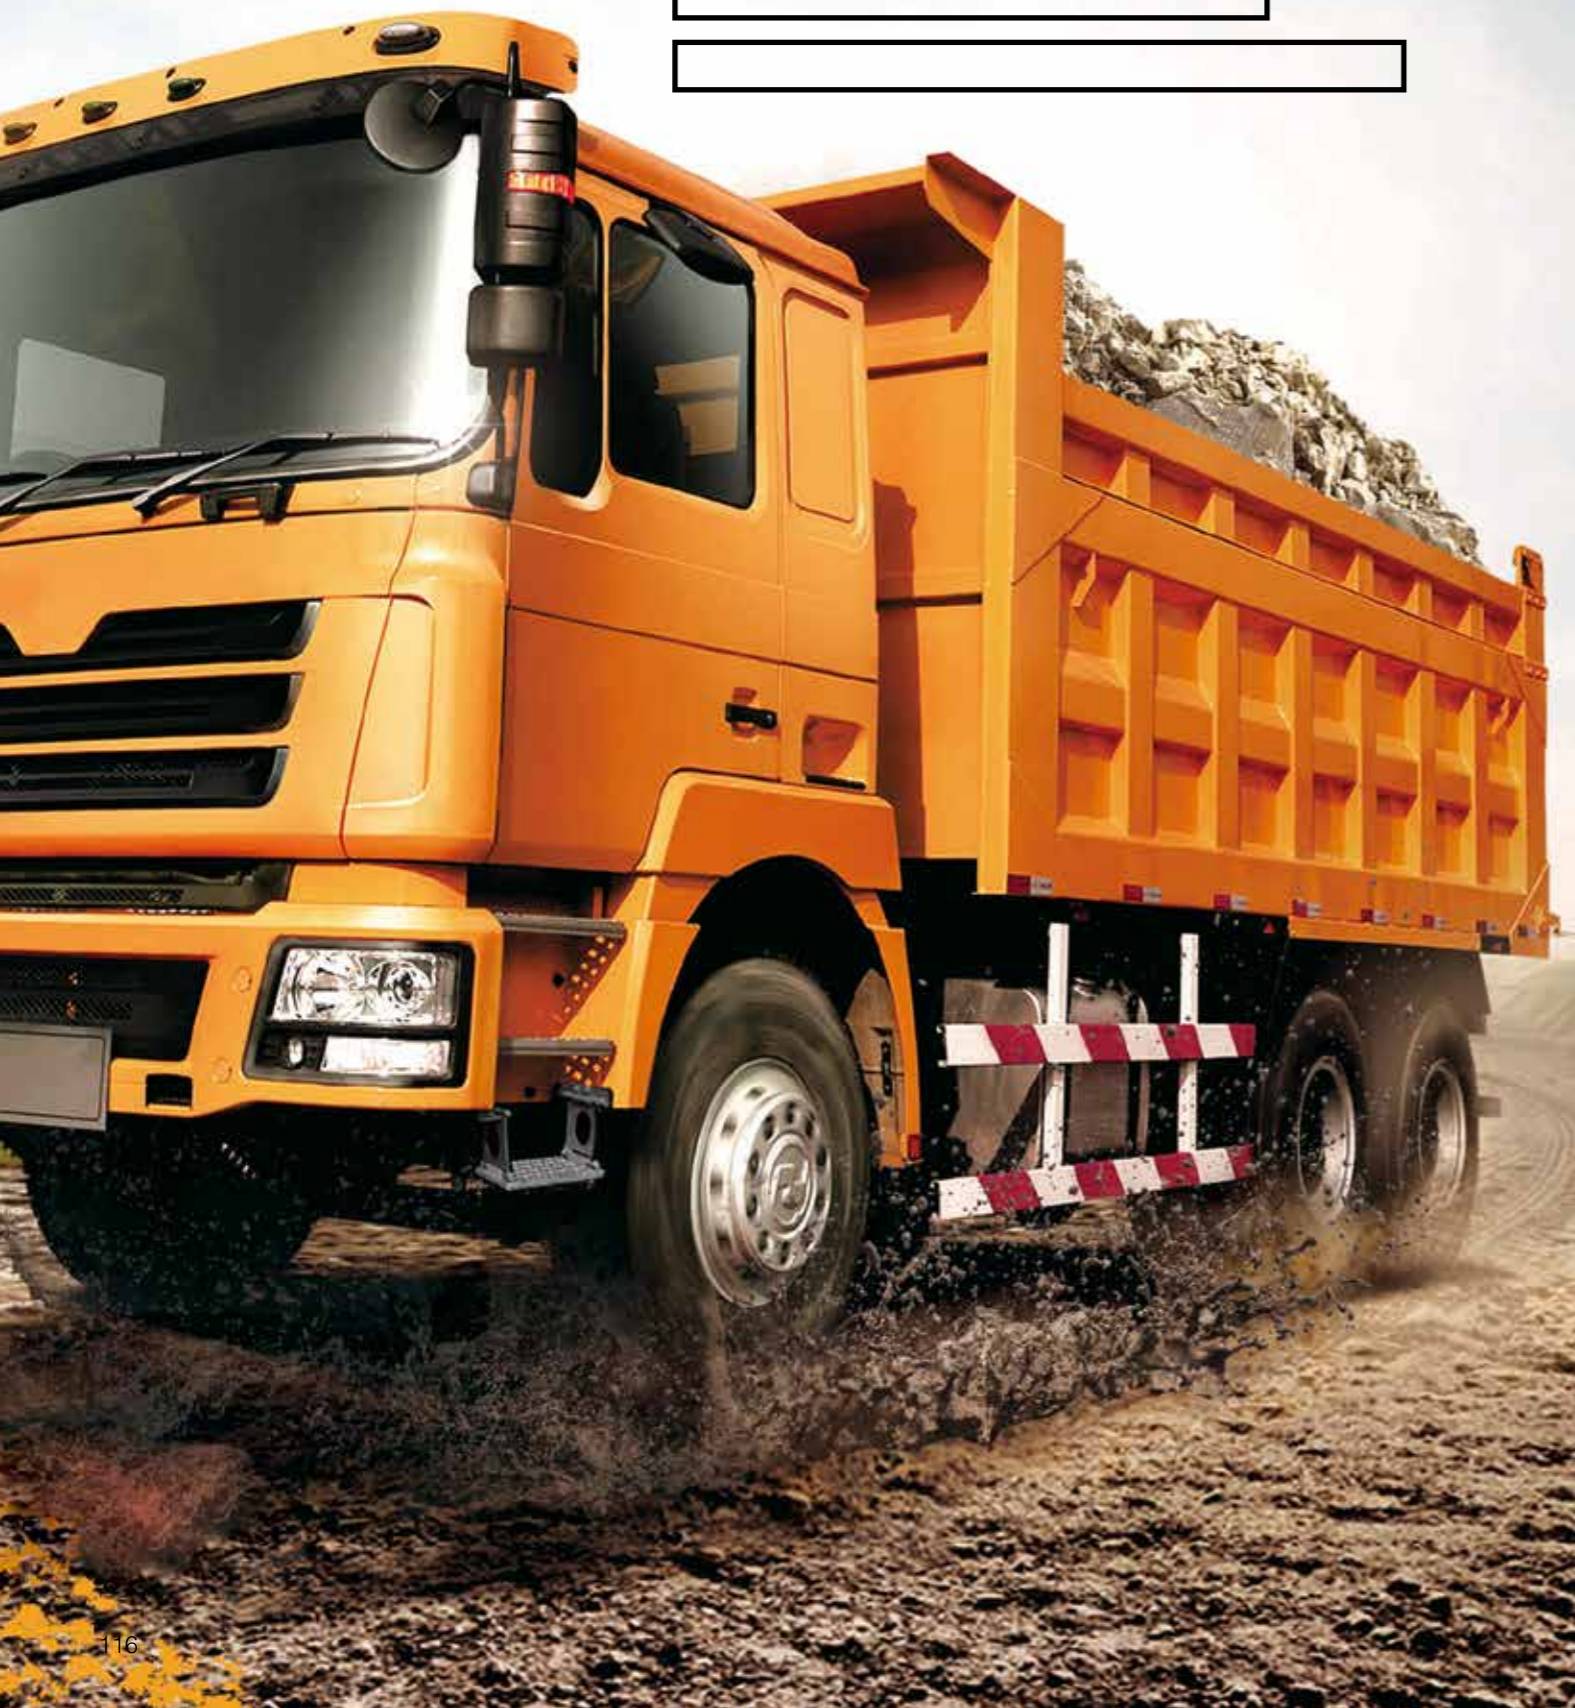

LDO986

Radial Truck Tire(Off Road Drive)

Suitable for hilly area and mine etc.,off road conditions

- 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.5	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.5	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1050	279	24.5	ETRTO
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.5	ETRTO
12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.5	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.5	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.5	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.5	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.5	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.5	ETRTO



LDO983

Radial Truck Tire(Off Road Drive)

Suitable for hilly area and mine etc.,off road conditions
 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 2.Chip,cut and abrasion resistance tread compound.
 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	22.0	GB



LDO993

Radial Truck Tire(Off Road all position)

Suitable for mine,off road conditions
 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 2.Chip,cut and abrasion resistance tread compound.
 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB



D960+

Radial Truck Tire(Off Road Drive)

Suitable for hilly area and mine etc.,off road conditions
 1.Off-road pattern block ensures powerful traction and good self-cleaning ability.
 2.Chip,cut and abrasion resistance tread compound.
 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.9	ETRTO



LDO912

Radial Truck Tire (Off Road Drive)

1.Good traction resistance.
 2.Chip,cut and abrasion resistance tread compound.
 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	22.0	GB
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



LLD10

Radial Truck Tire (Off Road Drive)

1.Good traction resistance.
 2.Chip,cut and abrasion resistance tread compound.
 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO



D969

Radial Truck Tire(Off Road all position)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	F	6.5	1950	720	2060	720	986	236	21.5	GB
8.25R20	14	136/134	F	6.5	2120	830	2240	830	986	236	21.5	GB
8.25R20	16	139/137	F	6.5	2300	930	2430	930	986	236	21.5	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1065	278	25.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	25.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	25.5	TRA
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1096	300	25.5	GB
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



LDM991

Radial Truck Tire (Off Road all position)

Suitable for off road conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO



D990

Radial Truck Tire (Off Road all position)

Suitable for off road conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO



D950

Radial Truck Tire(Short Haul)

- 1.Drive axle for on/off road conditions.
- 2.Deep and rigid block design for good traction.
- 3.Cut resistance compound.
- 4.Used for logging conditions where high traction required.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	25.0	TRA
11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	25.0	TRA
295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA

Coach&Urban



LAU609

Radial Bus Tire (Urban all position)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord .
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	3350	900	3550	900	1000	305	21.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	18	150/148 (152/148)	J(E)	8.25	3150	900	3350	900	958	276	21.0	ETRTO
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.0	ETRTO
245/70R19.5	12	129/127	J	7.50	1850	660	1750	660	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	760	1950	760	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	750	1950	750	839	248	16.0	ETRTO
245/70R19.5	16	135/133	J	7.50	2180	830	2060	830	839	248	16.0	TRA
245/70R19.5	16	136/134	J	7.50	2240	825	2120	825	839	248	16.0	ETRTO



LAU608

Radial Bus Tire (Coach all position)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord .
- 3.Good wet traction.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO



LDU610 New

Radial bus tire (Urban Drive)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	21.5	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.5	ETRTO



LAU802

Radial Bus Tire (Urban all position)

- 1.Enhanced sidewall ensures high safety.
- 2.Long service life.
- 3.Typical used for urban bus.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
275/70R22.5	16	148/145 152/148	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB
245/70R19.5	12	129/127	J	7.50	1850	660	1750	660	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	760	1950	760	839	248	16.0	TRA
245/70R19.5	14	133/131	J	7.50	2060	750	1950	750	839	248	16.0	ETRTO
245/70R19.5	16	135/133	J	7.50	2180	830	2060	830	839	248	16.0	TRA
245/70R19.5	16	136/134	J	7.50	2240	825	2120	825	839	248	16.0	ETRTO



LAU603

Radial Bus Tire (Coach all position)

- 1.Suitable for all axle of bus riding on highway.
- 2.Long life.
- 3.Good grip performance.
- 4.Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



LFL866

Radial bus tire (small bus all position)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA

Light Truck





KMA652 New

Radial Truck Tire (On&Off Road)

Suitable for all position axle of light trucks

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture
3. HAT technology low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	11.5	GB



KCA651 New

Radial Truck Tire (Regional)

Suitable for all position axle of light trucks

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Zig-zag grooves for excellent handling.
- 3.HAT technology low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	M	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	M	6.50H	1600	770	1800	770	855	235	11.5	GB



KMA653 New

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture
- 3.HAT technology low heat generation



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	13.0	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	13.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	13.0	GB



KLS200 New

Radial Truck Tire (Regional all position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO



KJT016 New —

Radial truck tire(Regional Drive)

Regional Haul Application / Pickup & Delivery Service Drive

- 1.Aggressive zigzag center grooves and open shoulder grooves provides outstanding traction in mud and snow;
- 2.Stone rejectors protects the casing in base of the tread groove;
- 3.Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 4.3D sipes lock together under compression for the stability of a solid block;
- 5.Strong carcass materials help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	TRA
225/70R19.5	14	128/126	N	6.75	1700	760	1800	760	811	226	15.0	TRA



KLT200 New —

Radial Truck Tire (Regional Trailer)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	12.5	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	12.5	GB
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO



KLD200 New —

Radial Truck Tire (Regional drive)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.0	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	14.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO



KTD23 New —

Radial Truck Tire (Regional drive)

Suitable for drive axle of trucks using for high traction and high scrub applications.

1. Horizontal pattern provides tyre excellent drive and braking performance.
2. Shoulder pattern groove and open pattern design with good tire heat dissipation
3. Pattern block stiffer effectively restrains grinding block root tear and decorative pattern



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	15.8	TRA
245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA



LFL866

Radial Truck Tire (Regional)

1. Extra wide tread design for high mileage and even wear.
2. Zig-zag grooves for excellent handling.
3. Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA
225/90R17.5	14	127/125	L	6.75	1650	700	1750	700	851	226	13.0	JATMA
225/90R17.5	16	128/126	L	6.75	1700	700	1800	700	851	226	13.0	JATMA



LDL831

Radial truck tire (Regional Drive)

1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Strong wear resistance and long life.
3. Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	16.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO



F820

Radial truck tire (Regional all position)
Suitable for medium trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	12.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	12.5	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L/M	7.50	2120	825	2240	825	839	248	13.0	ETRTO



F830

Radial Truck Tire (Regional all position)
Suitable for small trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



LLF86

Radial Truck Tire (Regional)
Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO





LLA78

Radial Truck Tire (Regional all position)
Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



LAM903

Radial Truck Tire (On&Off Road all position)
1.Suitable for medium trucks running on on/off road.
2.High traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	8	112/107	L/M	6.00G	975	460	1120	460	805	215	9.5	GB



LAL815

Radial Truck Tire (Regional all position)
1.Extra wide tread design for high mileage and even wear.
2.Zig-zag grooves for excellent handling.
3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	15.0	JATMA



D905

Radial Truck Tire (Regional Drive)

- 1.Suitable for medium trucks running on the high-grade road.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.0	GB
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	16.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	16.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	16.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO



LAR919

Radial Truck Tire (On&Off Road all position)

- 1.Pattern block design reduces shoulder heat.
- 2.Wide running surface and higher saturation design improves the wear mileage.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	K	4 1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	12	110/105	K	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	16.0	GB



LLF26

Radial Truck Tire (Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M	6.75	2575	875	2725	875	842	240	12.0	ETRTO
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA



LAR959

Radial Truck Tire (On&Off Road all position)

1. Wide and deep tread grooves for long tire life.
2. Excellent cutting and chipping resistance.
3. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R13LT	8	93/89	F	4.50B	580	460	650	460	655	170	12.5	GB
6.00R14LT	8	95/90	F	4 1/2J	600	460	690	460	680	170	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



LLA08

Radial Truck Tire (On&Off Road all position)

1. Suitable for medium trucks running on the normal road.
2. Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	131/126	L	6.50H	1700	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



D955

Radial truck tire (On&Off Road Drive)

1. Suitable for medium trucks running on the normal road.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



LLD09

Radial Truck Tire (On&Off Road Drive)

- 1.Suitable for medium trucks running on the normal road.
- 2.Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	855	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	14.5	GB
215/75R17.5	12	124/123	K	6.00	1550	675	1600	675	767	211	14.0	ETRTO
215/75R17.5	14	126/124	K	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	128/126	K	6.00	1700	750	1800	750	767	211	14.0	ETRTO
215/75R17.5	16	135/133	K	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	K	6.75	1900	775	2000	775	797	233	15.0	ETRTO
235/75R17.5	16	141/140	K	6.75	2500	850	2575	850	797	233	15.0	ETRTO
235/75R17.5	18	143/141	K	6.75	2575	875	2725	875	797	233	15.0	ETRTO



D969

Radial Truck Tire (Off Road all position)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	F	5.50F	1060	670	1215	670	775	200	15.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	815	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	865	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	865	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	17.5	GB



F835

Radial Truck Tire (Regional all position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
LT235/85R16	14	126/123	L	6 1/2J	1550	750	1700	750	806	235	8.9	—
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA



LAL812

Radial Truck Tire (Regional all position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LAL867

Radial Truck Tire (Regional all position)
Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	12	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LDO993

Radial Truck Tire (Off Road all position)

1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	14.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	16.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	18.0	GB

Winter






KWS600 New

Radial Truck Tire on Ice and Snow

Suitable for steer axle of trucks under snow condition.
 1. Lasting grip and stability with M+S and 3PMSF marking.
 2. Optimized rib contact combats uneven wear and improves wet handling and braking.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	14.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	14.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO



KWD600 New

Radial Truck Tire On Ice And Snow

1. Suitable for drive axle of trucks under snow condition
 2. Lasting grip and stability with M+S and 3PMSF marking
 3. Optimized rib contact combats uneven wear and improves wet handling and braking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



LDW807

Radial Truck Tire on Ice and Snow (Drive)

1. High safety and good handling.
 2. Optimized rib contact combats uneven wear and improves wet handling and braking.
 3. Long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO



KWD700 New

Radial Truck Tire on Ice and Snow

Long Haul Application Drive
 1. 3D Kerf technology provides excellent traction and long original tread life;
 2. Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions;
 3. Long life low rolling resistance;
 4. Optimizes the footprint for even wear and long tread life;
 5. Strong carcass materials help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	21.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	21.5	TRA



LDW808

Radial Truck Tire on Ice and Snow (All position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	15.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	13.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	13.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	13.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB



LFW806

Radial Truck Tire on Ice and Snow (All position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Low noise.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	15.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	15.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO





SPECIALTY — TIRE

OTR

Radial OTR

Dump Truck



LMS401

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.

Good self cleaning

Flower chimb angle changed design, it delivers good self cleaning.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1673	597	50.5
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	55.5
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	60.5



DO993

Radial OTR(Short Haul)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	30.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0





LB02S

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
18.00R33	★★	191	209	13.00/2.5	10900	650	18500	800	1877	498	53.0



LB06S

Radial OTR

1. Good traction and wear resistance.
2. Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
750/65R25	★★	190	209	24.00/3.0	10600	475	18500	625	1610	754	43.5
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	42.5
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1873	750	42.5



LB03S

Radial OTR

1. Self-cleaning tread design provides good traction and stability on the soft and muddy ground.
2. Tire side anti-friction design prevent tire side scratch damage.
3. Deepened tread provides excellent wear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	★★	177	195	11.25/2.0	7300	650	12150	800	1548	432	42.0
18.00R25	★★	185	204	13.00/2.5	9250	650	16000	800	1673	498	46.0



DM992

Radial OTR

1. Long life.
2. Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inated Pressure (kPa)			
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	24.0

Loader



DM992+

Radial OTR

- 1.Long life.
- 2.Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	10.00	4875	700	8500	950	1300	350	26.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	26.0



LB01N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	475	8500	600	1348	445	27.0
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1492	520	30.0
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1617	597	33.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1873	750	39.0



DO993+

Radial OTR (Short Haul)

- 1.Good traction resistance.
- 2.Chip, cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	10.00	4875	700	8500	950	1300	350	28.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	28.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	28.0



LM01N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1617	597	30.5



LB03SD

Radial OTR

Exceptionally robust in masacre conditions

A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing.

A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.

Excellent compromise of adhesion and traction

A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion,traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	475	8500	600	1399	445	62.5
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1548	520	70.0
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1673	597	76.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	85.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	92.5



LB06S

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
850/65R25	☆☆	196	207	27.00/3.5	12500	475	17500	625	1740	850	44.5
750/65R25	☆☆	190	209	24.00/3.0	10600	475	18500	625	1610	754	43.5



LB02SD

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre;

High Efficiency

The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential

The sidewall/tread intersection design gives an excellent level of damage and cut resistance.

Operating comfort

A wide, square tread gives better stability in

loading operations and whilst travelling

A directional pattern.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
20.5R25	★★	177	193	17.00/2.0	7300	475	11500	600	1548	520	70.0
23.5R25	★★	185	201	19.5/2.5	9250	475	14500	600	1673	597	76.0
26.5R25	★★	193	209	22.00/3.0	11500	475	18500	600	1798	673	85.0
29.5R25	★★	200	216	25.00/3.5	14000	475	22400	600	1921	750	92.5



LD702

Radial OTR

- 1.Excellent grip:the combination of vertical and horizontal pattern groove.
- 2.Safety and comfort:strengthened bead area tubeless solution preventing sudden pressure loss.

Size	Ply Rating	Load Index	Speed Symbol	Rim	LOAD CAPACITY (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
24R20.5	★ /16PR	176	F	18.00	7100	600	1370	600	22.0





LM11N

Radial OTR

- 1. Exceptional traction and manoeuvrability.
- 2. Good flotation.

Mobile Crane

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
445/95R25	★★	177	E	11.25/2.0	7300	900	1481	435	23.0
385/95R25	★★	170	E	10.00/1.5	6000	900	1369	379	21.0



LSN201

Radial OTR

- 1. Good traction resistance.
- 2. Chip, cut and abrasion resistance tread compound.

SNOW WORKS

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
15.525	★★	160	176	12.00/1.3	4500	475	7100	600	1277	394	25.0
17.525	★★	167	182	14.00/1.5	5450	475	8500	600	1348	445	28.0
20.525	★★	177	193	17.00/2.0	7300	475	11500	600	1492	520	32.0
23.525	★★	185	201	19.50/2.5	9250	475	14500	600	1617	597	33.0
26.525	★★	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0



Bias OTR



Dump Truck

EM01(E-3) New

OTR Tire

- 1 Deep tread pattern ensure tyre life.
- 2 Wider tread blocks enhance traction performance.
- 3 Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4 Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
13.00-25	28	8.50/1.3	9250	1050	4875	700	350	1300	30.0	TT
14.00-24	28	10.0	10000	925	5600	650	375	1370	32.0	TT
14.00-25	36	10.00/1.5	11500	1200	6500	850	375	1370	32.0	TT



LL25(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-25	28	11.25/2.0	11500	750	6700	575	430	1495	28.5	TT/TL	
16.00-25	32	11.25/2.0	12500	875	7300	650	430	1495	28.5	TT/TL	
16.00-25	36	11.25/2.0	13600	975	7750	725	430	1495	28.5	TT	



EM02(E-4) New

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	60.0	TL	
24.00-35	42	17.00/3.5	29000	750	16500	550	655	2175	60.0	TL	





LL131(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-25	28	8.50	---	---	4800	710	335	1300	24.5	TT	



LL26/E-3

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT/TL	
18.00-25	40	13.00/2.5	17000	950	9750	700	500	1615	30.0	TT/TL	



LL42(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	28	10.0	10000	925	5600	650	375	1370	27.0	TT	
14.00-25	36	10.00/1.5	11050	1100	5500	850	375	1370	27.0	TT	



LL56(E-3)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT	
18.00-25	36	13.00/2.5	16000	850	9250	625	500	1615	30.0	TT	



LL90(E-4)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-33	32	13.00	17500	750	10000	575	500	1875	50.0	TL	
18.00-33	36	13.00	18500	850	10600	625	500	1875	50.0	TL	
18.00-33	40	13.00	19500	950	11200	700	500	1875	50.0	TL	



E-4

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-33	32	15.00/3.0	---	---	10300	500	570	1940	42.0	TL	
21.00-33	42	15.00/3.0	---	---	12400	690	570	1940	42.0	TL	



E-4

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	32	15.00/3.0	21200	650	12150	500	570	2050	42.0	TL	
21.00-35	36	15.00/3.0	23000	750	12850	550	570	2050	42.0	TL	
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	42.0	TL	



Underground Work



LSM401(L-4S)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10.00-20	14	---	A2	7.5	3260	670	278	1073	35.0	TT	
10.00-20	16	---	A2	7.5	3535	770	278	1073	35.0	TT	



LSM401(L-4S+)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10.00-20	14	---	A2	7.5	3260	670	278	1073	45.0	TT	
10.00-20	16	---	A2	7.5	3535	770	278	1073	45.0	TT	



LSM402

OTR Tire

- 1.Special tread compound design High wear resistance performance.
- 2.Wide tread arc and deep pattern design Increase tyre life.
- 3.Sole sidewall protection design Enhance puncture resistance performance.
- 4.Novel appearance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
9.00-20	14	---	A2	7.0	4375	725	255	1015	35.0	TT	
9.00-20	16	---	A2	7.0	4750	825	255	1015	35.0	TT	
10.00-20	14	---	A2	7.5	3260	670	278	1073	45.0	TT	
10.00-20	16	---	A2	7.5	3535	770	278	1073	45.0	TT	
12.00-20	18	---	A2	8.5	5800	775	315	1175	60.0	TT	
12.00-20	20	---	A2	8.5	6150	850	315	1175	60.0	TT	
12.00-24	16	---	A2	8.5	6150	675	315	1245	55.0	TT	
12.00-24	18	---	A2	8.5	6500	750	315	1245	55.0	TT	
12.00-24	20	---	A2	8.5	6900	825	315	1245	55.0	TT	
12.00-24	24	---	A2	8.5	7500	975	315	1245	55.0	TT	
14.00-24	28	---	A2	10.0	10000	925	375	1420	65.0	TT	
14.00-24	32	---	A2	10.0	10900	1050	375	1420	65.0	TT	
17.5-25	20	---	A2	14.00/1.5	8250	575	395	1350	65.0	TT	
17.5-25	32	---	A2	14.00/1.5	11700	830	395	1350	65.0	TT	
18.00-25	32	---	A2	13.00/2.5	15000	750	495	1615	85.0	TL	
18.00-25	40	---	A2	13.00/2.5	17000	950	495	1615	85.0	TL	



TM401(E-4)

OTR Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
14.00-24	28	---	A2	10.0	13500	1000	375	1420	53.0	TT	
16.00-25	36	---	A2	11.25/2.0	18400	1000	430	1550	67.0	TL	



L301(E-3+)

OTR Tire

- 1.Deepen the pattern design, increase the service life of the tire.
- 2.Large tread pattern block design, uniform tread wear.
- 3.Special mine formula, anti cutting, anti tearing, super abrasion resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	36.0	TT	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	45.0	TT	



LL25(E-3/L-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	25.0	TL	
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/15	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	18	19.50/2.5	10500	350	6700	275	595	1615	31.5	TT	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	
26.5-25	20	22.00/3.0	13200	350	8250	250	675	1750	35.0	TT	
26.5-25	24	22.00/3.0	14000	400	9250	300	675	1750	35.0	TL	
26.5-25	28	22.00/3.0	15500	475	10000	350	675	1750	35.0	TT/TL	
29.5-25	28	25.00/3.5	17500	425	11500	325	750	1875	40.0	TL	

Loader



LL136(E-3/L-3)

OTR Tire

- 1.Specialized pattern for sand and other soft surfaces.
- 2.High side-skid resistance and traction.
- 3.Excellent in self-cleaning,handling stability and driving comfot.
- 4.Larger contact area offers even wear and long life.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT	



E-3/L-3

OTR Tire

- 1.Suitable for heavy loaders used on bad road condition of mine,stone pit and tunnel,etc.
- 2.Good impale and wear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
29.5-29	28	25.00/3.5	19000	425	12150	325	750	1975	40.0	TL	




LL55(E-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16/70-20	10	13	4200	325	2400	250	410	1075	20.0	TT	
16/70-20	14	13	5150	450	5150	450	410	1075	20.0	TT	

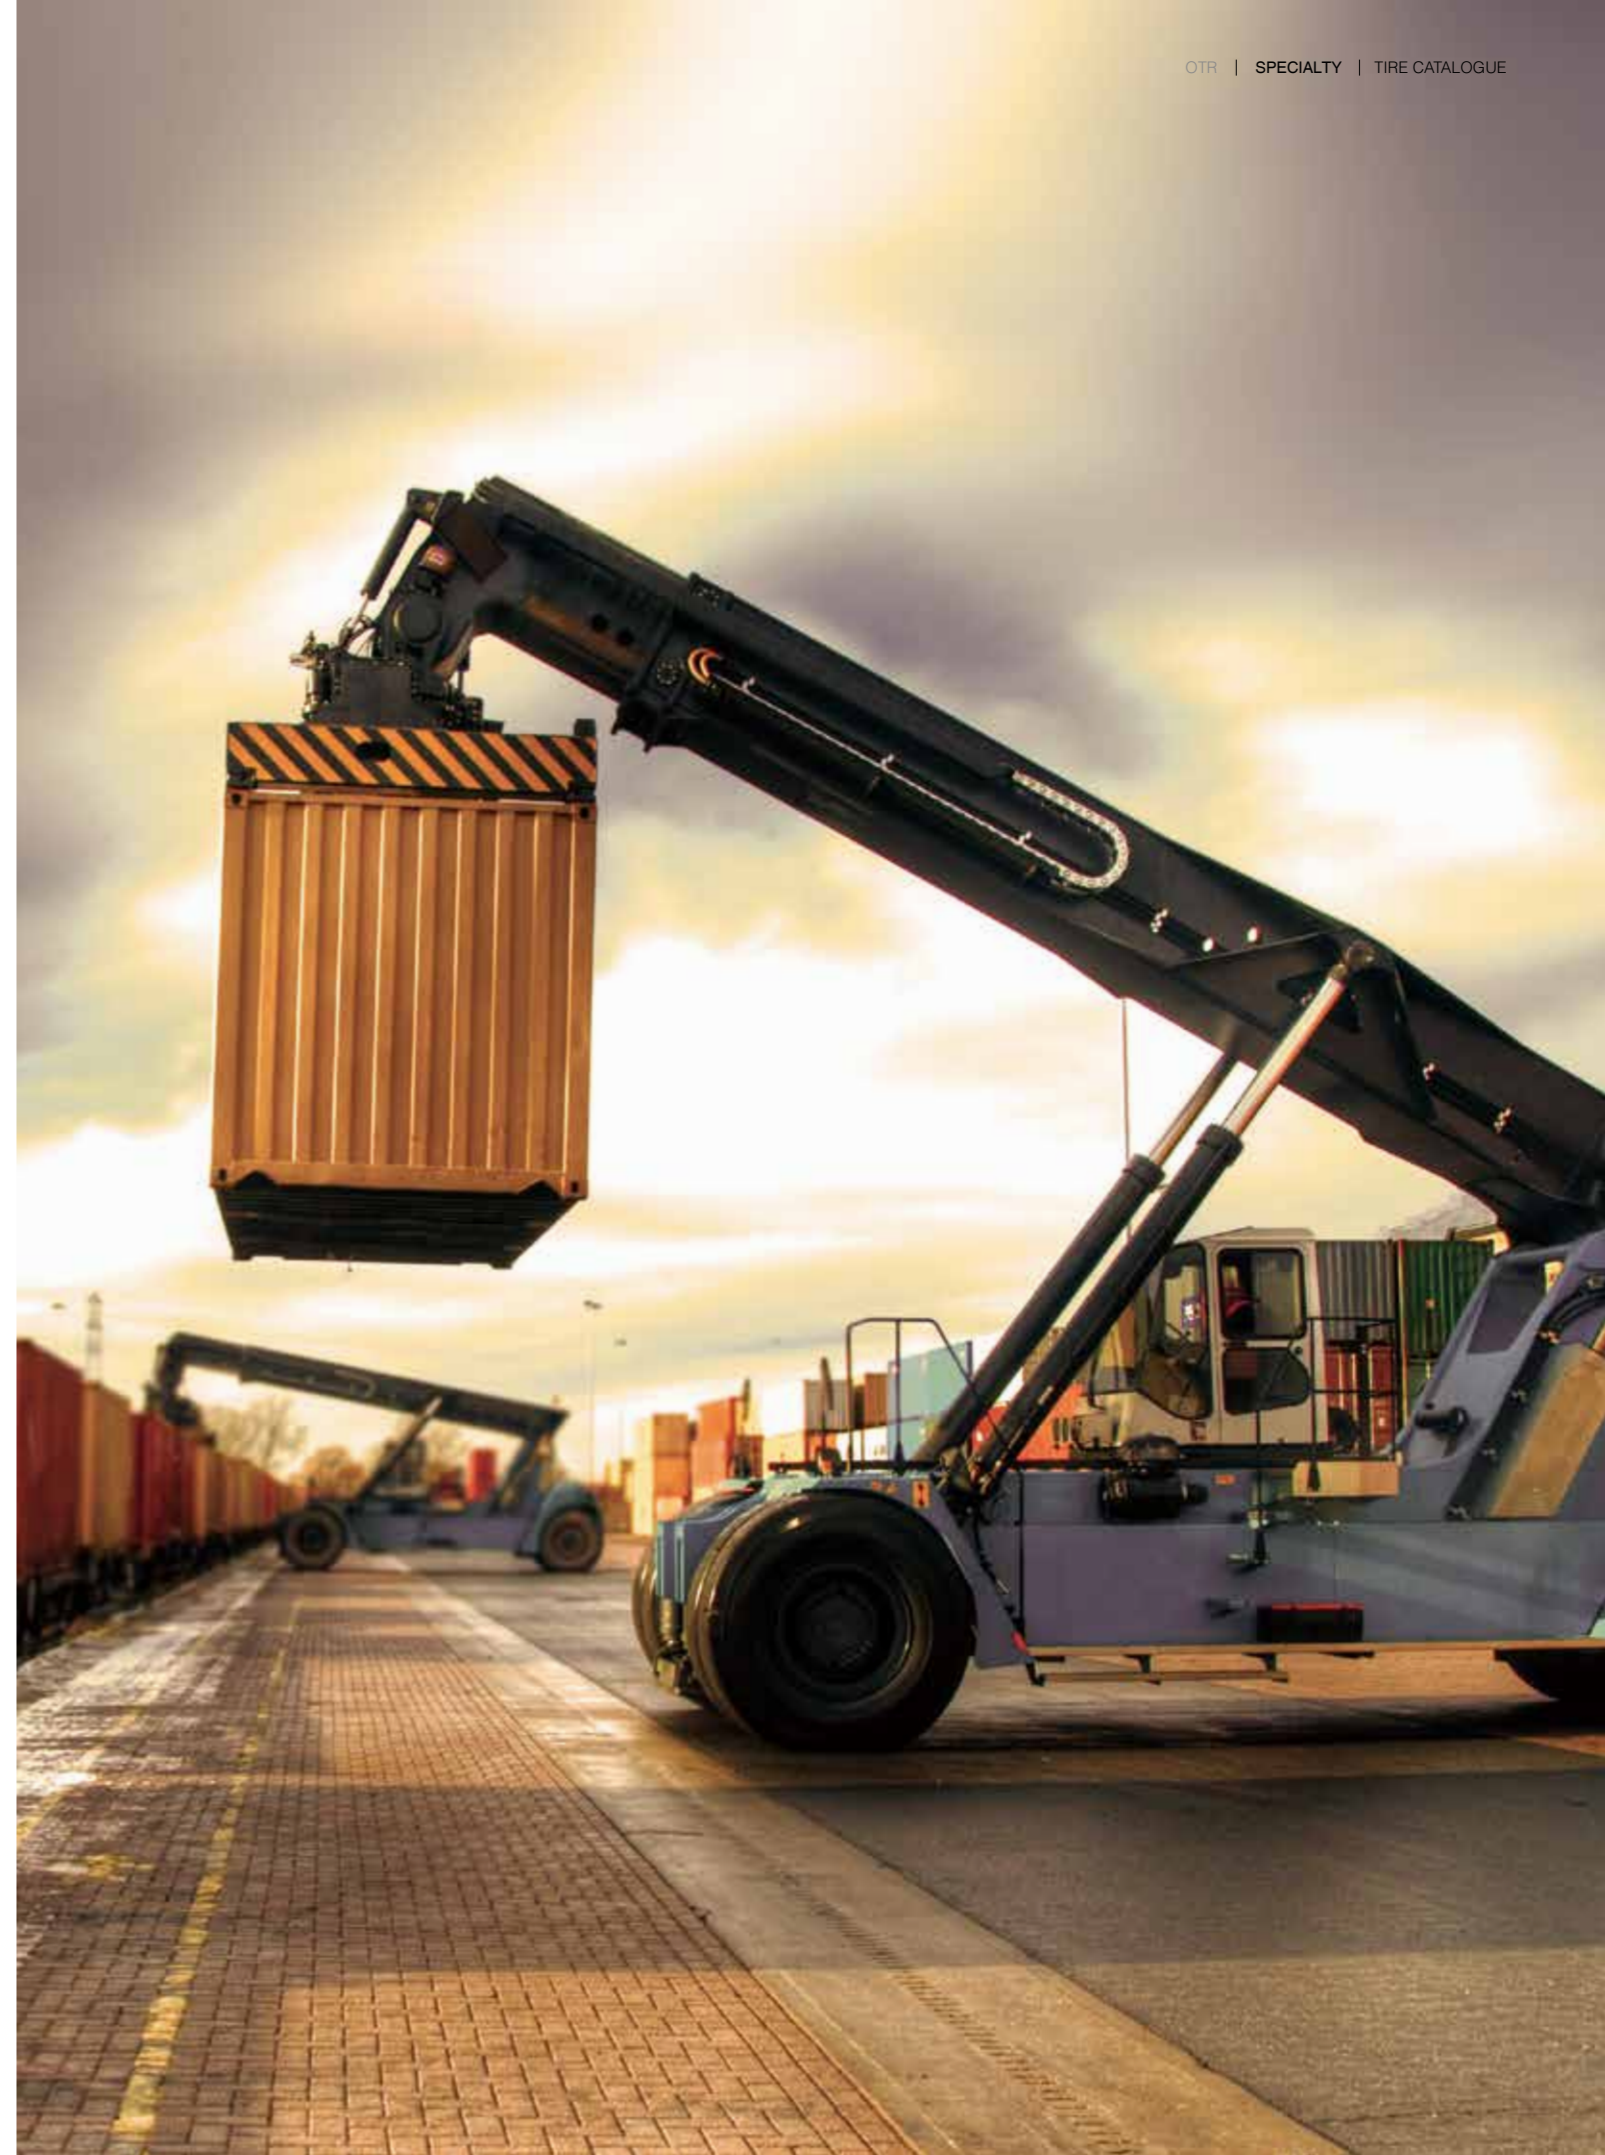



Port

LP401(IND-4)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
14.00-24	28	---	A2	10.0	13500	1000	375	1420	53.0	TT	
16.00-25	36	---	A2	11.25/2.0	18400	1000	430	1550	67.0	TL	
18.00-25	40	---	A2	13.00/2.5	22900	1000	500	1675	67.0	TL	



EM03(E-4)

Port Tire

- 1.Deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design ,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
12.00-24	24	---	A2	8.5	7500	975	315	1275	40.0	TT	

Graders



G-2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-24	12	8.00TG	5600	450	2725	300	335	1280	24.0	TL	
13.00-24	18	8.00TG	6700	675	3500	450	335	1280	24.0	TL	
14.00-24	12	8.00TG	6300	425	3075	275	360	1350	24.0	TT/TL	
14.00-24	16	8.00TG	7300	550	3650	350	360	1350	24.0	TT/TL	



LP402(IND-3)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	44	---	A2	13.00/2.5	24300	1000	500	1675	44.0	TL	
21.00-25	40	---	A2	15.00/3.0	27290	1000	570	1750	44.0	TL	

Compactions



LG201(G-2)

OTR Tire

- 1. Good steer and traction.
- 2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-24	12	11.25/2.5	7100	325	3650	225	430	1490	28.5	TT	
16.00-24	16	11.25/2.5	8250	425	4500	250	430	1490	28.5	TT	
16.00-24	20	11.25/2.5	9250	525	5450	420	430	1490	28.5	TT	



E-2/L-2

OTR Tire

- 1. Good steer and traction.
- 2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	24.0	TL	
17.5-25	12	14.00/1.5	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/1.5	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	



LC101

OTR Tire

- 1. Available for loaders operating under seriously tough service conditions in tunnels.
- 2. Excellent wear and cut resistance.
- 3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
13/80-20	16	9.0	5430	800	325	1045	TT	



LL66A

OTR Tire

- 1. Available for loaders operating under seriously tough service conditions in tunnels.
- 2. Excellent wear and cut resistance.
- 3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
7.50-16	14	6.00G	2390	700	215	810	TT	
12.00-24	16	8.5	6150	675	315	1245	TT	
12.00-24	18	8.5	6500	750	315	1245	TT	
12.00-24	20	8.5	6900	825	315	1245	TT	



LL66B

OTR Tire

- 1. Available for loaders operating under seriously tough service conditions in tunnels.
- 2. Excellent wear and cut resistance.
- 3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
9.00-20	14	7.0	4375	725	255	1015	TT	



LML401

Logging Tire

- 1. Available for logging transport of short haul.
- 2. Good running stability and powerful grip.
- 3. Powerful resistance to wear, cut and attack.
- 4. Good traction.

Size	Ply Rating	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
11.00-20	16	8.0	3350	810	293	1131	32.0	TT	
11.00-20	18	8	3650	910	293	1131	32.0	TT	



LL711

Logging Tire

- 1. Available for logging transport of short haul.
- 2. Good running stability and powerful grip.
- 3. Powerful resistance to wear, cut and attack.
- 4. Good traction.

Size	Ply Rating	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
12.00-24	20	8.5	4495	750	315	1275	36.0	TT	

Forestry



LD701

- 1. Available for gravel road.
- 2. Good delivery performance.
- 3. Low rolling resistance and good heat dissipation.
- 4. Lateral grip.

Size	Ply Rating	Rim	50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18-20	14	14.00T	4625	360	455	1090	16.0	TT/TL	
20-20	16	14.00T	6000	360	505	1180	17.0	TL	
22-20	14	17.0	4125	280	555	1075	18.0	TL	

Sand



SPECIALTY — TIRE

Agricultural
Tire



Radial Agricultural Tire



Tractors

LR861

Radial Agricultural Tire

- 1. Better traction and braking performance.
- 2. Save work time and fuel.
- 3. Better running stability.
- 4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
280/85R24	115/112	A8/B	W9 W10	1215	160	1086	282	39.0
320/85R24	122/119	A8/B	W9 W10 W11	1500	160	1154	319	41.0
320/85R28	124/121	A8/B	W9 W10 W11	1600	160	1255	319	41.0
320/85R32	126/123	A8/B	W9 W10 W11	1700	160	1357	319	41.0
320/85R32	142/139	A8/B	W9 W10 W11	2650	400	1357	319	41.0
320/85R36	128/125	A8/B	W9 W10 W11	1800	160	1458	319	41.0
340/85R24	125/122	A8/B	W11 W12	1650	160	1188	343	42.0
340/85R28	127/124	A8/B	W11 W12	1750	160	1289	343	42.0
340/85R32	142/139	A8/B	W11 W12	2650	360	1391	343	42.0
340/85R36	132/129	A8/B	W11 W12	2000	160	1492	343	42.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/85R24	131/128	A8/B	W11 W12 W13	1950	160	1256	380	45.0
380/85R28	133/130	A8/B	W11 W12 W13	2060	160	1357	380	45.0
380/85R30	135/132	A8/B	W11 W12 W13	2180	160	1408	380	45.0
380/85R34	137/137	A8/B	W11 W12 W13	2300	160	1510	380	45.0
380/85R34	147/147	A8/B	W11 W12 W13	3075	240	1510	380	45.0
420/85R24	137/134	A8/B	W13 W14L W15L	2300	160	1324	418	48.0
420/85R28	139/136	A8/B	W13 W14L W15L	2430	160	1425	418	48.0
420/85R30	140/137	A8/B	W13 W14L W15L	2500	160	1476	418	48.0
420/85R34	142/139	A8/B	W13 W14L W15L	2650	160	1578	418	48.0
420/85R38	144/141	A8/B	W13 W14L W15L	2800	160	1679	418	48.0
460/85R30	145/142	A8/B	W14L W15L W16L	2900	160	1544	455	51.0
460/85R34	147/144	A8/B	W14L W15L W16L	3075	160	1646	455	51.0
460/85R38	149/146	A8/B	W14L W15L W16L	3250	160	1747	455	51.0
460/85R42	150/147	A8/B	W14L W15L W16L	3350	160	1849	455	51.0
460/85R46	152/149	A8/B	W14L	3550	160	1943	464	51.0
460/85R46	158/155	A8/B	W14L	4250	240	1943	464	51.0
520/85R38	155/152	A8/B	DW16L DW18L	3875	160	1849	516	54.0
520/85R42	157/154	A8/B	DW16L DW18L	4125	160	1951	516	54.0
520/85R42	167/164	A8/B	DW16L DW18L	5450	320	1951	516	54.0
420/80R46	145/142	A8/B	W12 W13	2900	160	1840	418	47.0
420/80R46	151/148	A8/B	W12 W13	3450	240	1840	418	47.0
480/80R42	151/151	A8/B	DD16L DW16L W16L	3450	160	1835	479	49.0
480/80R42	156/156	A8/B	DD16L DW16L W16L	4000	240	1835	479	49.0
480/80R46	158/158	A8/B	DD16L DW16L W16L	4250	240	1936	479	49.0
420/90R30	142/139	A8/B	DW13 W14L	2650	160	1518	418	48.0
420/90R30	147/144	A8/B	DW13 W14L	3075	240	1518	418	48.0
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0



LR650

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
440/65R24	128/131	D/A8	W13 W14L W15L	1800	160	1182	441	45.0
440/65R28	131/134	D/A8	W13 W14L W15L	1950	160	1283	441	45.0
480/65R24	133/136	D/A8	W14L W15L	2060	160	1234	479	46.0
480/65R28	136/139	D/A8	W14L W15L	2240	160	1335	479	46.0
540/65R24	140/143	D/A8	W16L W18L	2500	160	1312	550	48.0
540/65R28	142/145	D/A8	W16L W18L	2650	160	1413	550	48.0
540/65R30	150/153	D/A8	W16L W18L	3350	240	1464	550	48.0
540/65R34	145/148	D/A8	W16L W18L	2900	160	1566	550	48.0
540/65R38	153/156	D/A8	W16L W18L	3650	240	1667	550	48.0
600/65R28	147/150	D/A8	DW20B W18L	3075	160	1491	591	52.0
600/65R34	157/160	D/A8	DW20B W18L	4125	240	1644	591	52.0
600/65R38	153/156	D/A8	DW20B W18L	3650	160	1745	591	52.0
650/65R38	157/160	D/A8	DW20B	4125	160	1811	645	56.0
650/65R42	165/168	D/A8	DW20B	5150	240	1913	645	56.0
710/70R38	166/169	D/A8	DW23B	5300	160	1959	716	57.0
710/70R42	168/171	D/A8	DW23B	5600	160	2061	716	57.0
710/70R42	173/176	D/A8	DW23B	6500	240	2061	716	57.0



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
360/70R24	122/119	A8/B	W10 W11 W12	1500	160	1152	357	42.0
360/70R24	127/124	A8/B	W10 W11 W12	1750	240	1152	357	42.0
380/70R24	125/125	A8/B	W11 W12 W13	1650	160	1190	380	43.0
420/70R24	130/127	A8/B	W12 W13 W14L	1900	160	1248	418	44.0
420/70R24	136/133	A8/B	W12 W13 W14L	2240	240	1248	418	44.0
420/70R28	133/130	A8/B	W12 W13 W14L	2060	160	1349	418	44.0
420/70R28	139/136	A8/B	W12 W13 W14L	2430	240	1349	418	44.0
480/70R24	138/135	A8/B	W14L W15L W16L	2360	160	1316	479	47.0
480/70R28	140/137	A8/B	W14L W15L W16L	2500	160	1421	479	47.0
480/70R28	145/142	A8/B	W14L W15L W16L	2900	240	1421	479	47.0
480/70R28	151/148	A8/B	W14L W15L W16L	3450	320	1421	479	47.0
480/70R34	143/143	A8/B	W14L W15L W16L	2725	160	1580	479	47.0
480/70R38	145/142	A8/B	W14L W15L W16L	2900	160	1681	479	47.0
520/70R38	150/150	A8/B	W15L W15L W18L	3350	160	1749	516	48.0
580/70R38	155/155	A8/B	W18L	3875	160	1827	577	50.0
580/70R38	170/167	A8/B	W18L	6000	280	1827	577	50.0
280/70R20	116/113	A8/B	W9 W10	1250	240	900	282	35.5



New

Harvesters

Radial Agricultural Tire

1. Up to 10% load
2. Enhance bead strength
3. Longer service life.
4. Excellent stability and comfort.
5. More efficient traction.
6. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/70R28	157	D	DW18L DW20B W18L	4125	240	1551	591	52.5
600/70R28	161/161	A8/B	DW18L DW20B W18L	4625	280	1551	591	52.5
600/70R30	152	D	DW18L DW20B W18L	3550	160	1602	591	52.5
600/70R30	158	D	DW18L DW20B W18L	4250	240	1602	591	52.5
650/85R38	173/176	D/A8	DW20B DW21B DW23B	6500	240	2071	645	65.0



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
800/65R32	167	D	DW25B DW27B DH27B	5450	160	1853	798	58.0
800/65R32	172	D	DW25B DW27B DH27B	6300	240	1853	798	58.0
800/65R32	178	D	DW25B DW27B DH27B	7500	320	1853	798	58.0
800/65R32	181/181	A8/B	DW25B DW27B DH27B	8250	360	1853	798	58.0



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0



LR9000

New

Sprayers

Radial Agricultural Tire

1. Radial Agricultural Tire .
2. better soil protection.
3. Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
380/90R50	151/151	A8/B	W11 W12 W13	3450	240	1954	380	48.0
380/90R50	160/157	A8/B	W11 W12 W13	4500	400	1954	380	48.0



LBI301

Radial Agricultural Tire

1. STEEL BELTED
2. Wear and puncture resistance.
3. Good grip and self-cleaning performance.

Trailers

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/50R22.5 IMP	159	D	AG20.00	4375	400	1172	611	25.0
650/65R30.5 IMP	176	D	AG20.00	7100	400	1621	645	32.0
850/50R30.5 IMP	182	D	AG28.00	8500	400	1625	862	32.0



FL300 New

Radial Agricultural Tire

- 1. STEEL BELTED
- 2. Wear and puncture resistance.
- 3. Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/60R22.5 IMP	155	D	AG16.00	3875	400	1172	503	18.0
560/60R22.5 IMP	165	D	AG16.00 16.00 17.00 AG20.00	5150	500	1244	543	18.0
560/45R22.5 IMP	152	D	AG16.00	3550	400	1076	543	18.0
600/55R26.5 IMP	165	D	AG20.00	5150	400	1333	611	20.0
650/55R26.5 IMP	169	D	AG20.00	5800	400	1389	645	24.0
710/50R26.5 IMP	170	D	AG20.00 AG24.00	6000	400	1383	727	24.0
710/50R30.5 IMP	173	D	AG20.00 AG24.00	6500	400	1485	727	26.0



LR400 New

Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0
400/70R18 IND	147/147	A8/B	13.00	3075	400	1017	404	23.0
400/70R20 IND	149/149	A8/B	13.00	3250	400	1068	404	23.0



LR451

Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Enhance tread wear resistance performance.

Compact line

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
460/70R24 IND	152/152	A8/B	DW14L DW15L DW16L	3550	320	1254	455	36.0
460/70R24 IND	159/159	A8/B	DW14L DW15L DW16L	4375	400	1254	455	36.0
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	39.0



LR400 New

Radial Agricultural Tire

- 1. Increase traction performance.
- 2. Enhance shoulder wear and cut resistance performance.
- 3. Suitable for loaders and backhoe loaders.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
405/70R18	141/153	B/A2	13	2575	380	1025	407	23.0
405/70R20	143/155	B/A2	13	2725	380	1076	407	23.0

Tractor Steering Wheel



Bias Agricultural Tire



LBF201

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-16	6	---	A6	4.00E	525	370	150	710	15.0	TT	



LL30

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-12	6	---	A6	3.00D	240	360	110	535	10.0	TT	
4.00-14	4	---	A6	3.00D	270	340	110	590	10.0	TT	
4.00-14	6	---	A6	3.00D	350	400	110	590	10.0	TT	
4.00-16	6	---	A6	3.00D	800	400	110	640	10.0	TT	
4.50-14	8	---	A6	3.00D	1000	450	120	602	10.0	TT	
4.50-16	6	---	A6	3.00D	615	360	122	655	10.0	TT	
4.50-16	8	---	A6	3.00D	1000	450	122	655	10.0	TT	
5.00-14	8	---	A6	3.00D	500	450	130	620	12.0	TT	
5.00-15	8	---	A6	4.00E	675	450	140	665	10.0	TT	
6.00-16	6	---	A6	4.50E	495	250	165	745	13.0	TT	
6.50-20	8	---	A6	5.00F	865	420	180	860	16.0	TT	

Tractor Drive Wheel



LL31

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.00-12	4	---	A6	4.00E	280	200	145	590	22.0	TT	
5.50-17	6	---	A6	4.00E	440	250	145	750	22.0	TT	
6.00-12	4	---	A6	4.50E	335	180	165	640	22.0	TT	
6.00-12	6	---	A6	4.50E	405	250	165	640	22.0	TT	
6.00-12	8	---	A6	4.50E	420	260	165	640	22.0	TT	
6.00-14	6	---	A6	4.50E	450	250	165	690	20.5	TT	
6.00-14	8	---	A6	4.50E	685	420	165	690	20.5	TT	
6.00-16	6	---	A6	4.50E	495	250	165	745	22.0	TT	
7.50-16	6	---	A6	5.50F	650	210	205	810	23.0	TT	
7.50-16	8	---	A6	5.50F	700	240	205	810	23.0	TT	
7.50-20	6	---	A6	5.50F	760	210	205	910	24.0	TT	
7.50-20	8	---	A6	5.50F	880	280	205	910	24.0	TT	
8.3-24	6	---	A6	W7	810	240	210	995	30.0	TT	
8.3-24	8	---	A6	W7	920	280	210	995	30.0	TT	
8.5-20	8	---	A6	W7	880	250	210	895	30.0	TT	
9.5-20	8	---	A6	W8	955	280	240	950	30.0	TT	
9.5-24	6	---	A6	W8	940	210	240	1050	30.0	TT	
9.5-24	8	---	A6	W8	1110	280	240	1050	30.0	TT	
10-15	8	---	A6	9.00	950	310	254	775	20.0	TT	
11.2-24	6	---	A6	W10	950	180	285	1105	35.0	TT	
11.2-24	8	---	A6	W10	1150	250	285	1105	35.0	TT	
12-38	8	---	A6	DW11	1570	140	330	1575	35.0	TT	
12.4/11-28	6	---	A6	W11	1275	170	315	1260	38.0	TT	
12.4/11-28	8	---	A6	W11	1510	230	315	1260	38.0	TT	
14.9-24	6	---	A6	W13	1510	140	378	1265	38.0	TT	
14.9-24	8	---	A6	W13	1760	180	378	1265	38.0	TT	
14.9-28	6	---	A6	W13	1610	140	378	1365	38.0	TT	
14.9-28	8	---	A6	W13	1880	180	378	1365	38.0	TT	
16.9-34	8	---	A6	W15L	2380	170	430	1585	37.0	TT	
16.9-34	10	---	A6	W15L	2605	200	430	1585	37.0	TT	



LL32

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-16	10	---	A6	4.00E	1325	530	150	715	16.0	TT	
6.00-16	6	---	A6	4.50E	495	250	165	745	18.0	TT	
6.00-16	10	---	A6	4.50E	755	420	165	745	18.0	TT	
6.50-16	10	---	A6	5.00F	635	300	180	765	18.0	TT	
6.50-16	14	---	A6	5.00F	815	460	180	765	18.0	TT	
7.00-16	14	---	A6	5.50F	1010	460	190	785	18.0	TT	
7.50-16	10	---	A6	5.50F	800	320	205	810	20.0	TT	
7.50-16	14	---	A6	5.50F	1030	460	205	810	20.0	TT	



Tractor Drive Wheel



LL46

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
15-24	10	---	A6	DW14	2800	280	410	1330	33.0	TT	
16.9-28	8	---	A6	W15L	2175	170	430	1435	39.0	TT	
16.9-30	8	---	A6	W15L	2245	170	430	1485	39.0	TT	
16.9-30	10	---	A6	W15L	2455	200	430	1485	39.0	TT	



LBR103

New

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
23.1-26	10	---	A8	DW20	2900	140	587	1605	42.0	TT	
23.1-26	12	---	A6	DW20	3250	170	587	1605	42.0	TT	
23.1-26	14	---	A8	DW20	3550	190	587	1605	42.0	TT	
23.1-30	10	---	A8	DW20	3075	140	587	1707	42.0	TT	
23.1-30	12	---	A8	DW20	3450	170	587	1707	42.0	TT	
23.1-30	16	---	A6	DW20	4120	230	587	1707	42.0	TT	



LBR102

New

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
14.9-28	8	---	A6	W13	1880	180	378	1365	37.0	TT	



LL76

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
23.1-26	12	---	---	DW20	3610	170	587	1605	42.0	TT	

Implement



**Tractor Driving
Wheel Paddy Field**

R-2

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
19.5L-24	10	---	A6	17.00	2800	170	495	1382	92.0	TT	
28L-26	14	---	A6	DW25	4245	170	715	1672	100.0	TT	
23.1-26	12	---	A6	DW20	3610	170	587	1662	100.0	TT	



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
6.50-16	6	---	---	5.00F	565	250	165	830	60.0	TT	
7.50-16	8	---	---	5.50F	700	240	195	890	70.0	TT	
8.3-20	8	---	---	W7	760	280	210	950	75.0	TT	
8.3-24	8	---	---	W7	1275	330	210	1050	75.0	TT	
9.5-24	8	---	---	W8	1510	280	240	1150	80.0	TT	
11.2-24	8	---	---	W10	1700	270	285	1205	85.0	TT	
11/12.4-28	10	---	---	W11	2050	230	315	1293	90.0	TT	
14.9-30	10	---	---	W13	2190	230	378	1415	90.0	TT	
11-32	8	---	---	W10	1260	210	305	1460	85.0	TT	
16.9-34	10	---	---	W15L	2605	200	430	1585	90.0	TT	



LL2

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-8	4	---	---	3.00D	180	340	110	425	6.5	TT	
4.00-8	6	---	---	3.00D	410	420	110	425	6.5	TT	
4.00-8	8	---	---	3.00D	700	530	110	425	6.5	TT	
4.00-12	6	---	---	3.00D	240	360	112	535	7.5	TT	
4.00-14	6	---	---	3.00D	350	400	112	590	8.0	TT	
7.00-16	10	---	---	5.50F	1100	530	188	760	12.0	TT	
7.00-16	12	---	---	5.50F	1220	630	188	760	12.0	TT	
7.00-16	14	---	---	5.50F	1320	730	188	760	12.0	TT	



LL11

Agricultural Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
6.50-16	10	---	---	5.50F	975	530	185	750	10.0	TT	
6.50-16	12	---	---	5.50F	1060	630	185	750	10.0	TT	
7.00-16	10	---	---	5.50F	1100	530	188	760	12.0	TT	
7.00-16	12	---	---	5.50F	1220	630	188	760	12.0	TT	
7.00-16	14	---	---	5.50F	1320	730	188	760	12.0	TT	



LL15

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-16	6	---	---	3.00D	800	400	110	640	8.0	TT	
6.00-16	6	---	---	4.50E	635	320	170	730	9.0	TT	
6.00-16	8	---	---	4.50E	735	420	170	730	9.0	TT	
6.00-16	10	---	---	4.50E	860	530	170	730	9.0	TT	
6.50-16	10	---	---	5.50F	975	530	185	750	10.0	TT	
6.50-16	12	---	---	5.50F	1060	630	185	750	10.0	TT	
7.50-16	14	---	---	6.00G	1500	730	215	805	13.0	TT	



LL19

Agricultural Tire

- 1.Low noise.
- 2.Fuel saving.
- 3.Good wear resistance.
- 4.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-14	8	---	---	3.00D	595	390	158	635	9.0	TT	



LL27

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-14	8	---	---	3.00D	1000	450	120	602	8.0	TT	
5.50-16	8	---	---	4.00E	1100	470	150	685	8.0	TT	
5.50-16	10	---	---	4.00E	1325	530	150	685	8.0	TT	



LL29

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-16	6	---	---	3.00D	615	360	122	655	8.0	TT	
4.50-16	8	---	---	3.00D	1000	450	122	655	8.0	TT	
4.50-16	10	---	---	3.00D	1325	530	122	655	8.0	TT	
5.00-14	8	---	---	3.00D	1200	530	130	620	8.0	TT	



LL38

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-16	6	---	---	3.00D	615	360	122	655	8.0	TT	
4.50-16	8	---	---	3.00D	1000	450	122	655	8.0	TT	
4.50-16	10	---	---	3.00D	1325	530	122	655	8.0	TT	
5.00-16	8	---	---	4.00E	1200	600	135	680	8.0	TT	
5.00-16	10	---	---	4.00E	1350	650	135	680	8.0	TT	
5.50-16	8	---	---	4.00E	1100	470	150	685	8.0	TT	
5.50-16	10	---	---	4.00E	1325	530	150	685	8.0	TT	



LL40

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good traction.

Implement Steering/Support

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10-15	8	---	---	9.00	1240	300	300	775	10.0	TT	



LBR401

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
8.25-16	12	---	A6	6.50H	D1360 S1550	530	235	855	22.0	TT	



LL101

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Industry Tractor

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
16.9-28	12	---	A8	W15L	3450	260	429	1410	28.0		TL
19.5L-24	12	---	A6	DW16	3450	230	495	1340	30.0		TL



LBI301

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Implement Flotation/Traction

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
600/50-22.5IMP	16	169	A6	AG20.00	5770	260	611	1172	25.0		TL
850/50 -30.5IMP	---	173	A8	AG20.00	6500	200	645	1621	32.0		TL
850/50 -30.5IMP	---	179	A8	AG28.00	7750	200	862	1625	32.0		TL

SPECIALTY — TIRE

Industrial
Tire



LF401

Industrial Tire

1. Wear resistance compound, High wear resistance performance. Increase tyre life.
2. Deep pattern design and wide tread arc, Enhance self-cleaning performance.
3. Variational pattern design, Novel appearance.
4. New stamping design.

Industrial

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
18X7-8NHS	16	4.33R	1695	1000	173	465	18.0	TT	
5.00-8NHS	10	3.50D	1150	1000	137	470	15.0	TT	
6.00-9NHS	10	4.00E	1505	860	160	540	15.0	TT	
6.50-10NHS	10	5.00F	1655	790	175	590	16.0	TT	
7.00-12NHS	12	5.00S	2375	860	190	676	21.0	TT	
28X9-15NHS (8.15-15)	14	7.0	3050	970	220	710	18.0	TT	
8.25-15NHS	14	6.5	3775	830	235	840	23.0	TT	
250-15NHS	18	7.5	4110	1030	250	735	23.5	TT	
300-15NHS	18	8.0	5530	830	300	840	23.5	TT	
7.50-16NHS	12	6.00G	3195	790	215	805	22.0	TT	
9.00-20NHS	16	7.0	5195	760	259	1018	25.0	TT	



LL39

Industrial Tire

1. Good wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
6.50-10NHS	10	5.00F	1655	790	175	590	15.0	TT	
6.50-10NHS	14	5.00F	1975	1070	175	590	15.0	TT	
7.00-15NHS	12	5.50S	2900	850	194	735	20.0	TT	
8.15-15NHS	12	7.0	3230	840	215	704	16.0	TT	
18x7-8NHS	16	4.33R	1640	1000	173	465	16.0	TT	
28x9-15NHS	12	7.0	3230	840	215	704	16.0	TT	
28x9-15NHS	14	7.0	3050	970	220	710	13.0	TT	



LL45

Industrial Tire

- 1. Good wear and side slip resistance.
- 2. Stable performance.

Size	Ply Rating	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
5.00-8NHS	6	3.50D	850	600	137	470	12.0	TT	
5.00-8NHS	10	3.50D	1150	1000	137	470	12.0	TT	
6.00-9NHS	10	4.00E	1505	860	160	540	10.0	TT	
6.50-10NHS	10	5.00F	1655	790	175	590	15.0	TT	
7.00-9NHS	10	5.00S	1995	860	190	590	12.0	TT	
7.00-12NHS	12	5.00S	2375	860	190	676	12.0	TT	
7.50-15NHS	14	6.0	3375	925	215	780	18.0	TT	
8.25-12NHS	12	6.5	3060	720	235	765	12.0	TT	
8.25-15NHS	14	6.5	3775	830	235	840	15.0	TT	
8.25-15NHS	18	6.5	4240	1000	235	840	15.0	TT	
9.00-16NHS	14	6.50H	4495	760	255	890	16.0	TT	



LL65

Industrial Tire

- 1. Wear and crack resistance.
- 2. Lateral grip.

Size	Ply Rating	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
10.00-15NHS	14	7.5	2800	750	280	935	12.0	TT	



LL102

Industrial Tire

- 1. Wear and crack resistance.
- 2. Low rolling resistance.
- 3. Good heat dissipation.

Size	Ply Rating	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
10-16.5NHS	10	8.25	2135	520	264	773	13.0	TL	
10-16.5NHS	12	8.25	2375	620	264	773	13.0	TL	
12-16.5NHS	12	9.75	2865	550	307	831	13.0	TL	



LL103

Industrial Tire

- 1. Wear and crack resistance.
- 2. Low rolling resistance.
- 3. Good heat dissipation.

Size	Ply Rating	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
12-16.5LT	10	9.75	D1418 S1614	420	307	831	13.0	TL	
12-16.5LT	12	9.75	D1650 S1850	520	307	831	13.0	TL	

A long-exposure photograph of a city street at night. The street is illuminated by numerous streetlights, creating a series of bright, horizontal light trails that stretch across the frame. The foreground shows a cobblestone sidewalk and a metal railing. The background features a dark sky and distant city lights.

SPECIALTY _ TIRE

Bias Tire

Passenger Car



LL19

Bias Passenger Car Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.60-13	4	70	K	4J	330	170	145	600	6.0
5.60-13	6	74	K	4J	370	210	145	600	6.0



Mini Truck



LL20

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.00-10ULT	8	79/77	K	3.50B	D412 S437	400	143	517	8.0
5.00-12ULT	8	83/81	K	3.50B	D462 S487	400	143	568	8.0
5.00-12ULT	10	88/86	K	3.50B	D530 S560	500	143	568	8.0



LL21

Bias Mini Truck Tire

- 1.Good wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
4.50-12ULT	8	77/76	K	3.00B	D400 S412	400	127	545	7.0



LL9
Bias Light Truck Tire
1.Low noise.
2.Low rolling resistance.
3.Good heat dissipation.

Light Truck

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K/L	4.50E	D730 S825	530	170	705	9.0
6.50-15LT	8	101/97	K/L	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
7.50-15LT	10	115/110	K	6.00G	D1060 S1215	530	215	780	11.0
7.50-15LT	12	119/115	K/L	6.00G	D1215 S1360	630	215	780	11.0



LL9A
Bias Light Truck Tire
1.Low noise.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	520	215	805	11.5
7.50-16LT	12	120/116	K/L	6.00G	D1250 S1400	630	215	805	11.5
7.50-16LT	14	122/118	K/L	6.00G	D1320 S1500	730	215	805	11.5
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	11.5



LL11
Bias Light Truck Tire
1.Low noise and fuel saving.
2.Good wear resistance and heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K/L	5.50F	D925 S1060	630	185	750	10.0
7.00-15LT	10	109/105	K/L	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	118/114	K	5.50F	D1180 S1320	730	200	775	12.0





LL15

Bias Light Truck Tire

Good wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S560	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	99/95	K	4 1/2J	D710 S800	530	170	680	9.0
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K	4.50E	D730 S825	530	170	705	9.0
6.50-14LT	8	99/95	K	4 1/2J	D690 S775	420	180	705	9.0
6.50-14LT	10	104/100	K	4 1/2J	D800 S900	530	180	705	9.0
6.50-15LT	8	101/97	K	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K	5.50F	D925 S1060	630	185	750	10.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	530	215	805	13.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	13.0
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	13.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	13.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	855	14.5



LL16

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-14LT	8	99/95	K/L	4 1/2J	D690 S775	420	180	705	9.0
6.50-14LT	10	104/100	K/L	4 1/2J	D800 S900	530	180	705	9.0



LL17

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.
4. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	100/96	K	4 1/2J	D710 S800	530	170	680	9.0



LL18

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Fuel saving.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S560	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0



LL62

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	16.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	16.0



LL89

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	15.5
7.50-16LT	16	124/120	K	6.00G	D1520 S1700	758	215	816	15.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	867	18.5



LL19

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.
- 4.Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.50-13LT	8	88/84	K	4.00B	D500 S560	420	160	620	9.0



MG-99

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	18.0

Truck & Bus



LL1

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
12.00-24	16	156/152	G	8.5	D3550 S4000	670 740	315	1225	15.0
12.00-24	18	158/154	G	8.5	D3750 S4250	740 810	315	1225	15.0



LL2

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	118/114	K	5.50F	D1180 S1320	730	200	775	12.0
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL3

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	15.0



LL4

Bias Truck/Bus Tire

Good Wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	16.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	16.0



LL8

Bias Truck/Bus Tire

- 1. Good Wear and crack resistance.
- 2. High traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-15LT	10	109/105	K	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.50-15LT	12	119/115	K	6.00G	D1215 S1360	630	215	780	11.0
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0



LL48

Bias Truck/Bus Tire

- 1. Fuel saving.
- 2. Low noise.
- 3. Wear resistance.
- 4. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	13.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	13.5
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	13.5



LL47

Bias Truck/Bus Tire

- 1. Wear and crack resistance.
- 2. Low rolling resistance.
- 3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0
7.00-20	14	127/123	G	5.5	D1550 S1750	770 840	200	904	12.0
8.25-20	14	136/131	G/K	6.5	D1950 S2240	740 810	236	974	14.0
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.5
8.25-16LT	16	128/124	K/L	6.50H	D1600 S1800	730	235	855	12.5
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL59

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	12.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	835	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	835	14.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0
12.00-20	20	156/151	G	8.5	D3450 S4000	810 880	315	1125	15.0
14.00-20	18	161/156	E	10.0	D4000 S4625	600 670	375	1240	20.0
14.00-20	20	164/159	E	10.0	D4375 S5000	700 770	375	1240	20.0



LL96-T

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	14	118/114	G	5.50F	D1180 S1320	730	200	785	20.0
7.50-16LT	14	122/118	G	6.00G	D1320 S1500	730	215	816	22.0
7.50-16LT	16	126/123	G	6.00G	D1520 S1700	850	215	816	22.0
8.25-16LT	14	126/122	G	6.50H	D1500 S1700	630	235	867	22.0
8.25-16LT	16	128/124	G	6.50H	D1600 S1800	730	235	867	22.0
8.25-20	14	136/131	C	6.5	D1950 S2240	740 810	236	992	19.0
9.00-20	16	145/140	B	7.0	D2500 S2900	810 880	259	1038	22.0
11.00-20	18	153/148	C	8.0	D3150 S3650	840 910	293	1105	25.0
12.00-20	18	154/150	C	8.5	D3350 S3750	740 810	315	1145	25.0
13.00-20	18	158/154	B	9.0	D3750 S4250	700 770	340	1200	24.0



LL159

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-20	14	130/126	G	6.0	D1700 S1900	740 810	215	935	12.0



LL168

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	11.5
7.50-20	14	130/126	G K	6.0	D1700 S1900	740 810	215	935	11.5
8.25-20	14	136/131	G K	6.5	D1950 S2240	740 810	236	974	14.0
9.00-20	14	141/137	G K	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0

TIRE CATALOGUE



LL168A

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	11.5
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.0
8.25-16LT	16	128/124	K/L	6.50H	D1600 S1800	730	235	855	12.0

